


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
1	DIS-C-000585		T.K	E.K	07.07.27						

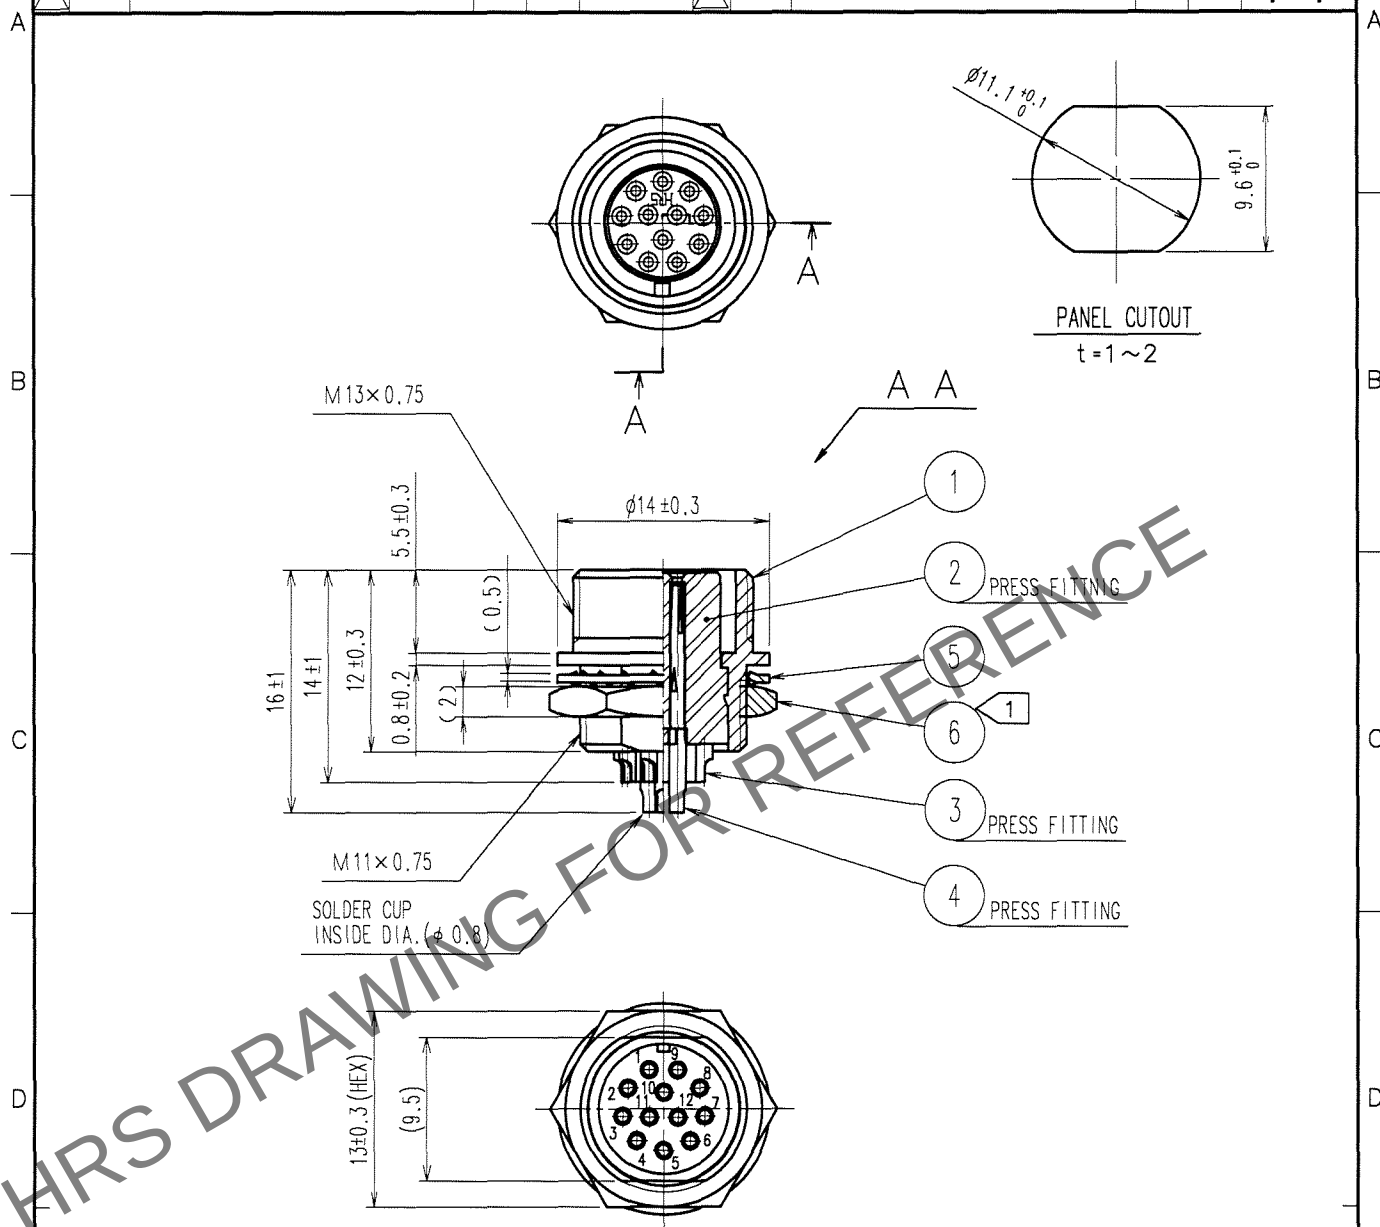

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ : 2N · m .
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ⑥ FROM LOOSENING.

3	PHOSPHOR BRONZE	SILVER PLATING 2 μ m min.	6	BRASS ①	NICKEL PLATING
2	POLYAMIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	BRASS	NICKEL PLATING	4	PHOSPHOR BRONZE	SILVER PLATING 2 μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN D.MATSUNE '05 10 01	DESIGNED D.MATSUNE '05 10 01	CHECKED E.KUNII '05 10 13	APPROVED M.SATO '05 10 14	RELEASED
----------------------	--	---------------------------------	------------------------------------	---------------------------------	---------------------------------	----------

DRAWING NO. EDC4-042429-73		PART NO. HR10A-10TR-12S(73)	
CODE NO. CL110-0453-0-73		1 1	