


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 Case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2		3		4			
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

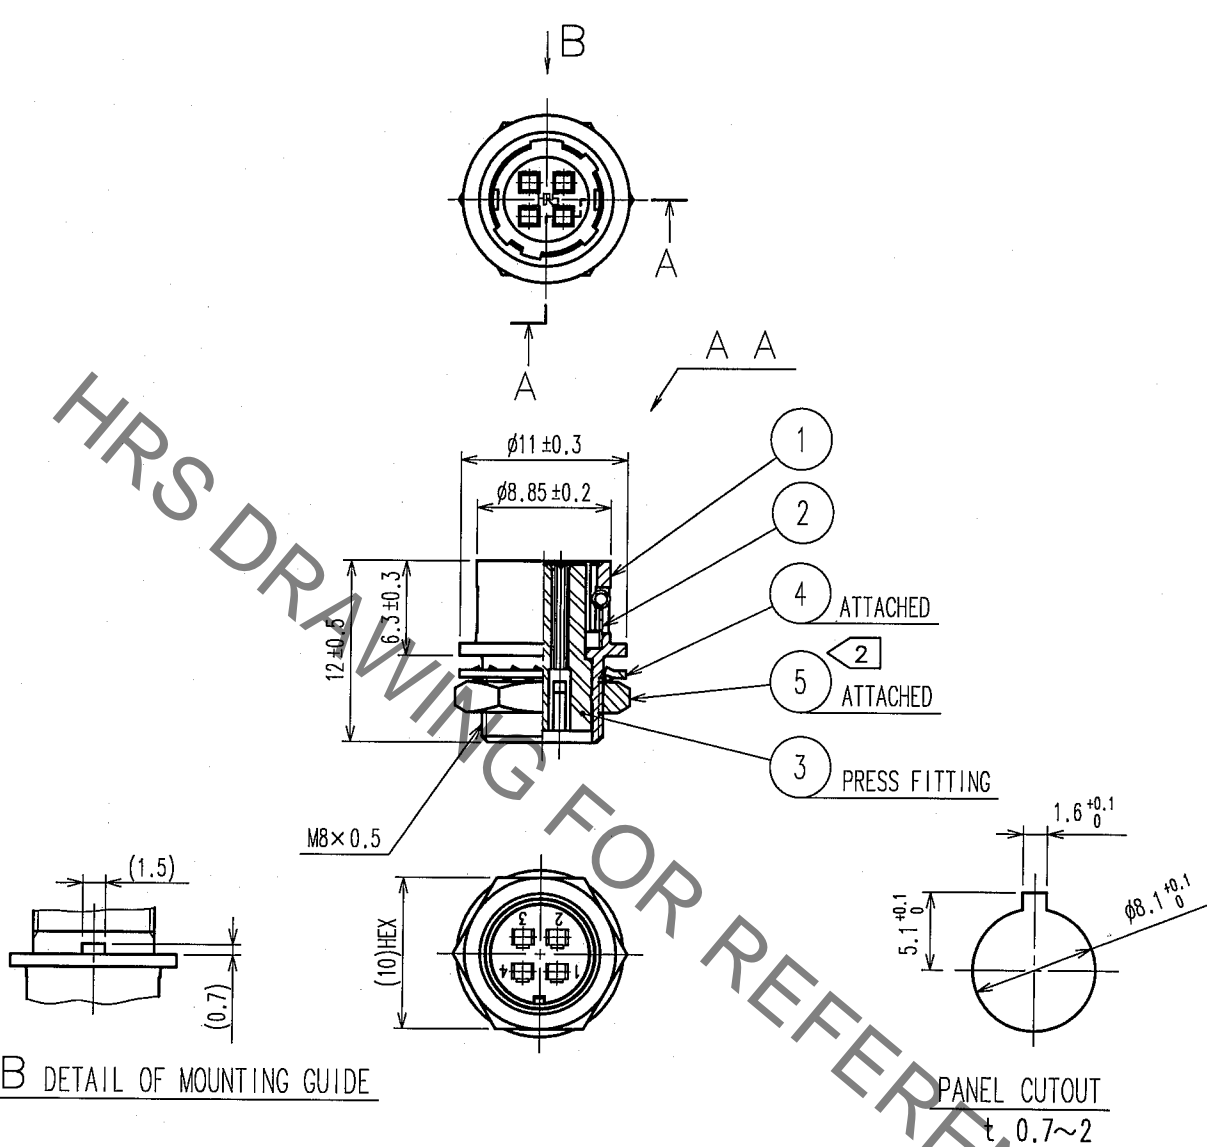

B DETAIL OF MOUNTING GUIDE

PANEL CUTOUT
 t 0.7~2

NOTE 1 APPLICABLE CONTACT : HR12-SC-212
 APPLICABLE WIRE : AWG#26~30 (INSULATOR OUTER DIA. OF ϕ 1 OR LESS)
 APPLICABLE TOOL , EXTRACTPR : HR12-SC-TP
 ② THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑤ : 1.5N · m .
 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
 REF. NO. ⑤ FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PBT	(BLACK) UL94V-0	5	BRASS	NICKEL PLATING
2	STAINLESS STEEL		4	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H.Kishi '05.08.29	H.Kishi '05.08.29	E. Kimura '05.08.30	M. Sato '05.08.30	

	DRAWING NO. EDC4-021660-73	PART NO. HR10A-7R-4SC(73)
SCALE 2 : 1		CODE NO. CL110-0506-5-73
UNITS mm	HIROSE ELECTRIC CO., LTD.	1/1