



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

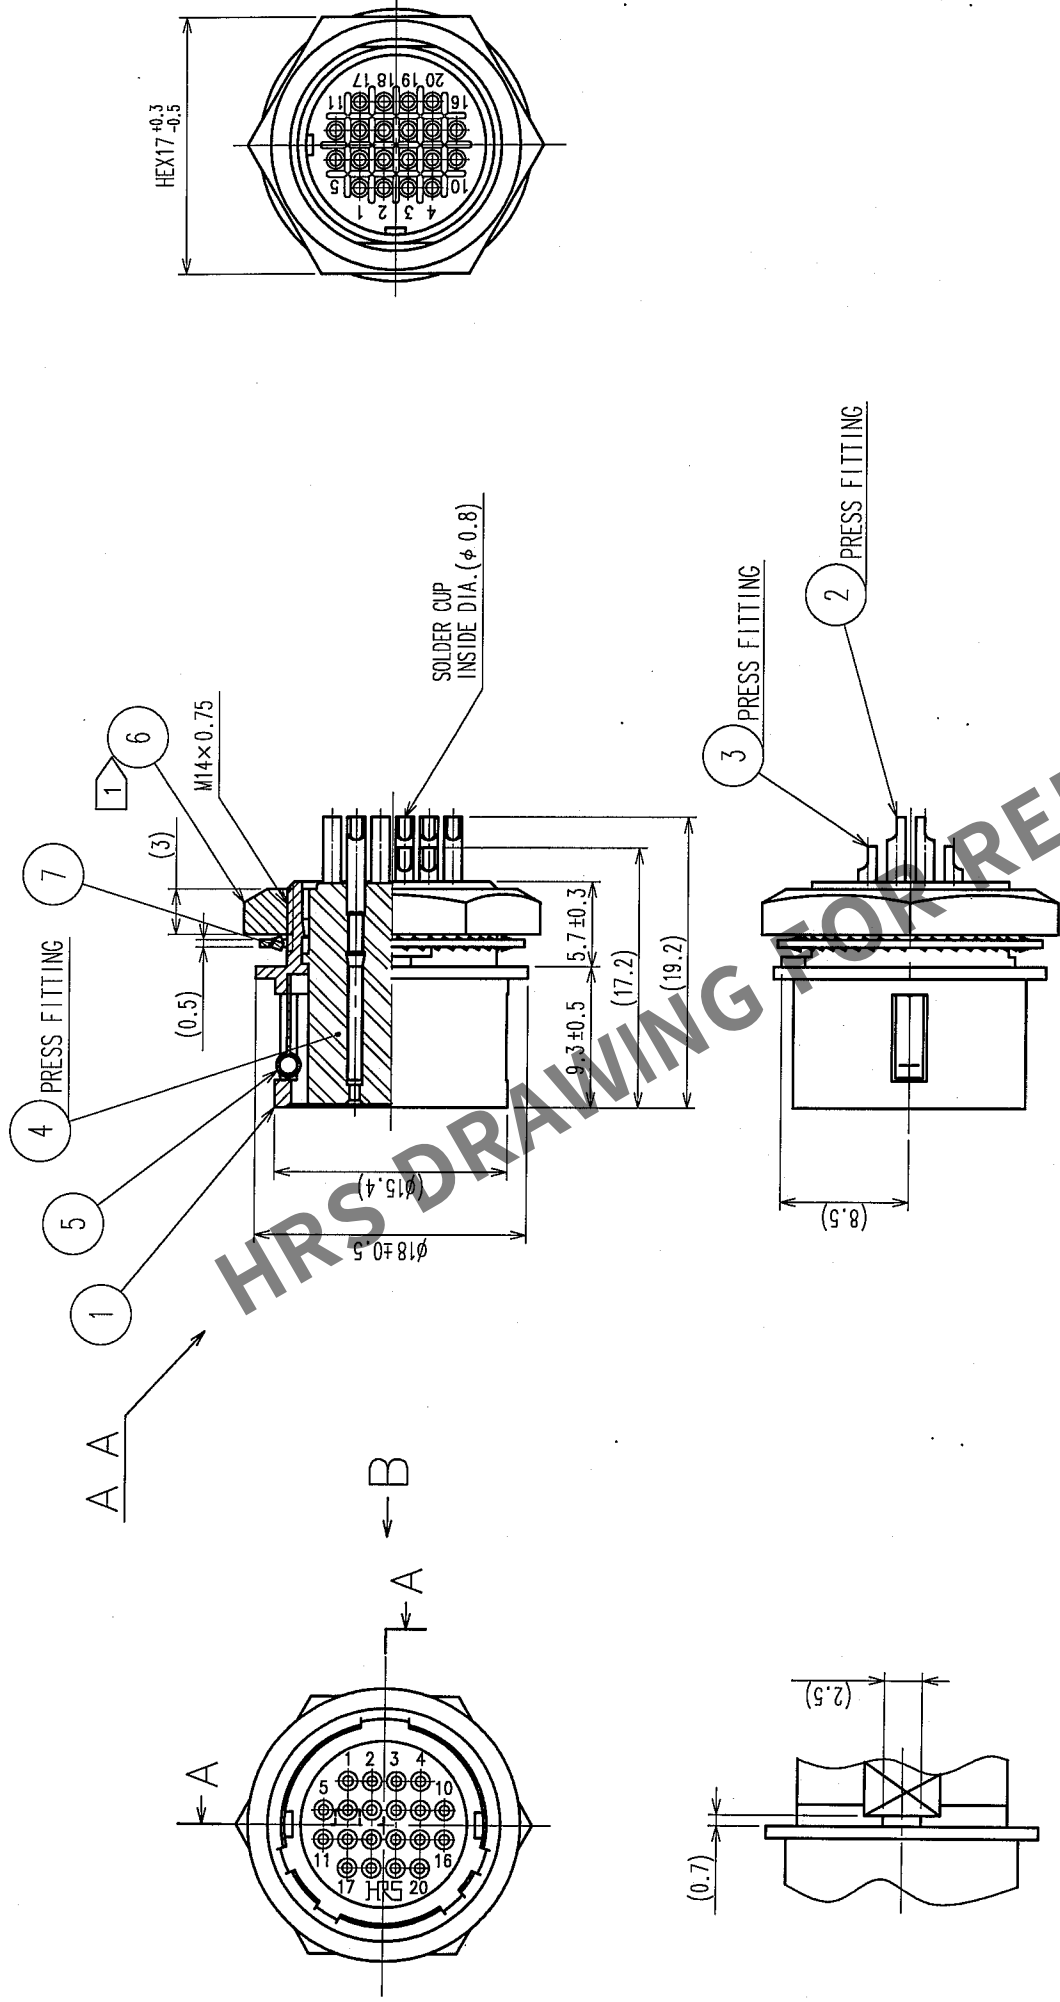

B DETAIL OF MOUNTING GUIDE

NOTE 1 > RECOMMENDED CLAMP TORQUE OF REF NO. ⑥ : 2-2.5 N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO. ⑥ FROM LOOSENING.

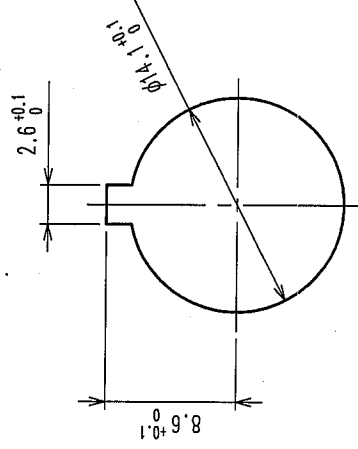

PANEL CUTOUT
t = 0.8~1.5

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	POLYAMIDE	(BLACK) UL94V-0	7	PHOSPHOR BRONZE	NICKEL PLATING
3	BERYLLIUM COPPER	SILVER PLATING 2μ m min.	6	BRASS	NICKEL PLATING
2	BERYLLIUM COPPER		5	STAINLESS STEEL	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING			

CODE NO. (COLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	D. Matsune	D. Matsune	E. Kuroki	U. Sato	
	05.10.01	05.10.01	05.10.03	05.10.14	

DRAWING NO.	PART NO.	CODE NO.
EDC3-045401-73	HR10A-13R-20S(73)	CL110-0714-2-73
SCALE 2 : 1		
UNITS mm		

HRS HIROSE ELECTRIC CO., LTD.