


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

A
B
C
D
E
F

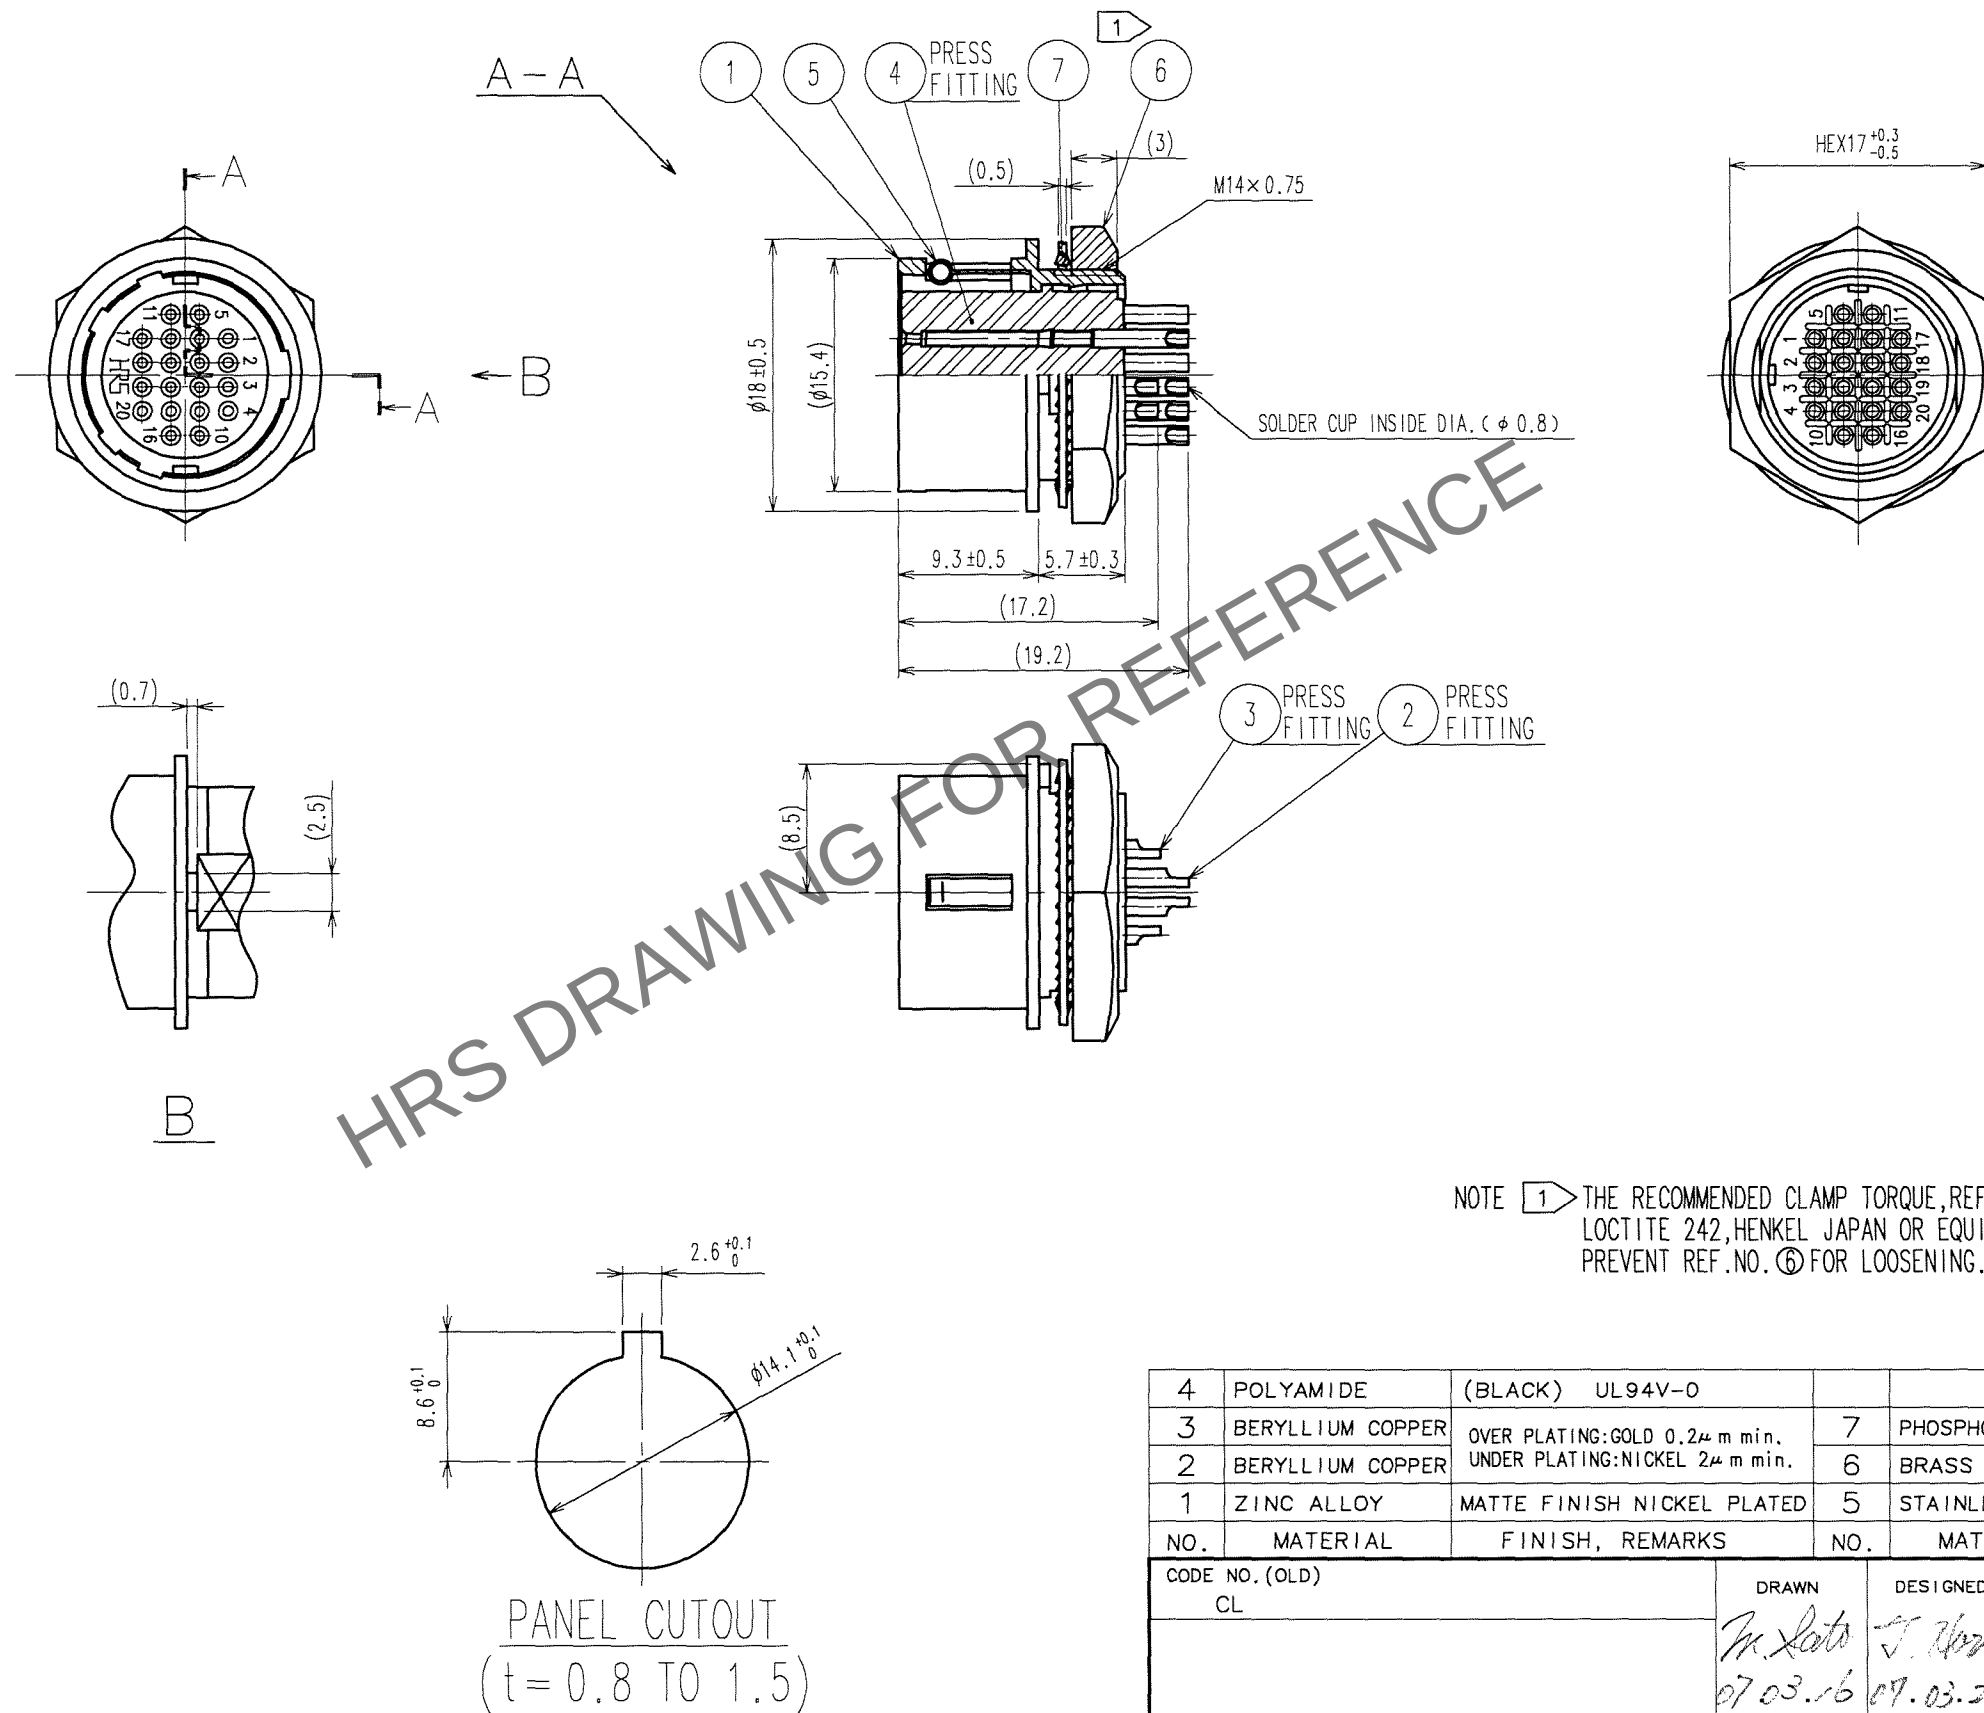

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑥ : 2 TO 2.5N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FOR LOOSENING.

4	POLYAMIDE	(BLACK) UL94V-0	7	PHOSPHOR BRONZE	NICKEL PLATING
3	BERYLLIUM COPPER	OVER PLATING: GOLD 0.2μm min.	6	BRASS	NICKEL PLATING
2	BERYLLIUM COPPER	UNDER PLATING: NICKEL 2μm min.	5	STAINLESS STEEL	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			M. Sato	T. Hori	M. Sato
			07.03.16	07.03.20	07.03.20
DRAWING NO. EDC3-045401-74			PART NO. HR10A-13R-20S(74)		
SCALE 2 : 1			CODE NO. CL110-0714-2-74		
UNITS mm			1 1		

A
B
C
D
E
F