


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE				
△								△											
△								△											
△								△											

A DETAIL OF MOUNTING GUIDE

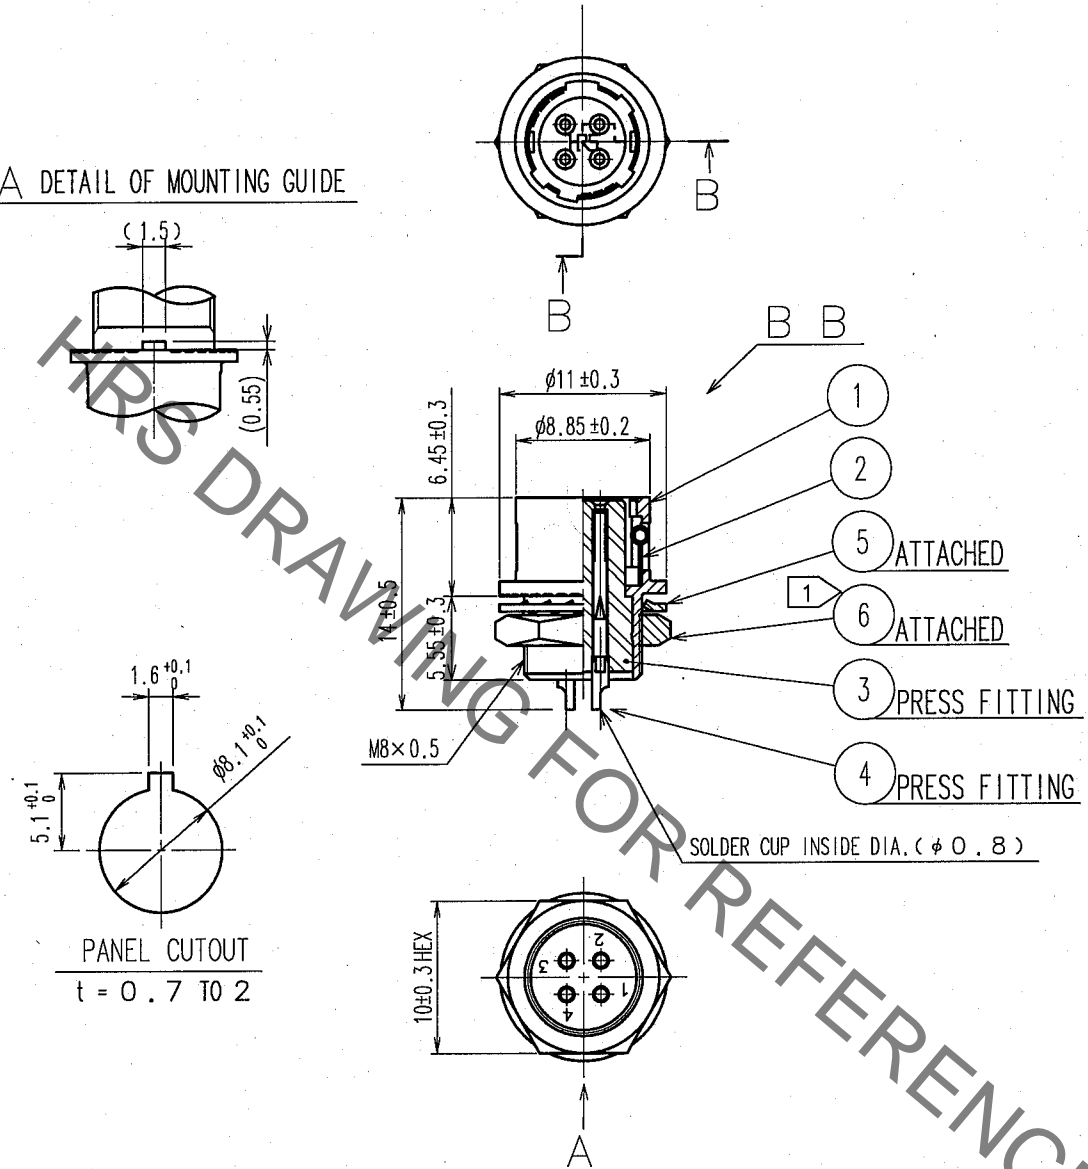

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF.NO ⑥ : 1.5N · m.  
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ⑥ FROM LOOSENING.  
② OVER PLATING : GOLD 0.2μ m min.  
UNDER PLATING: NICKEL 2μ m min.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	②
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	<i>S. Komatsu</i>	<i>S. Komatsu</i>	<i>E. Kunita</i>	<i>M. Saito</i>	
	'06.09.14	'06.09.14	'06.09.14	'06.09.15	

SCALE	DRAWING NO.	PART NO.
2 : 1	EDC4-042704-74	HR10G-7R-4S(74)
UNITS	CODE NO.	
mm	CL110-1601-1-74	1/1

