


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
1	DIS-C-000585		T.K	E.K	07.07.27						

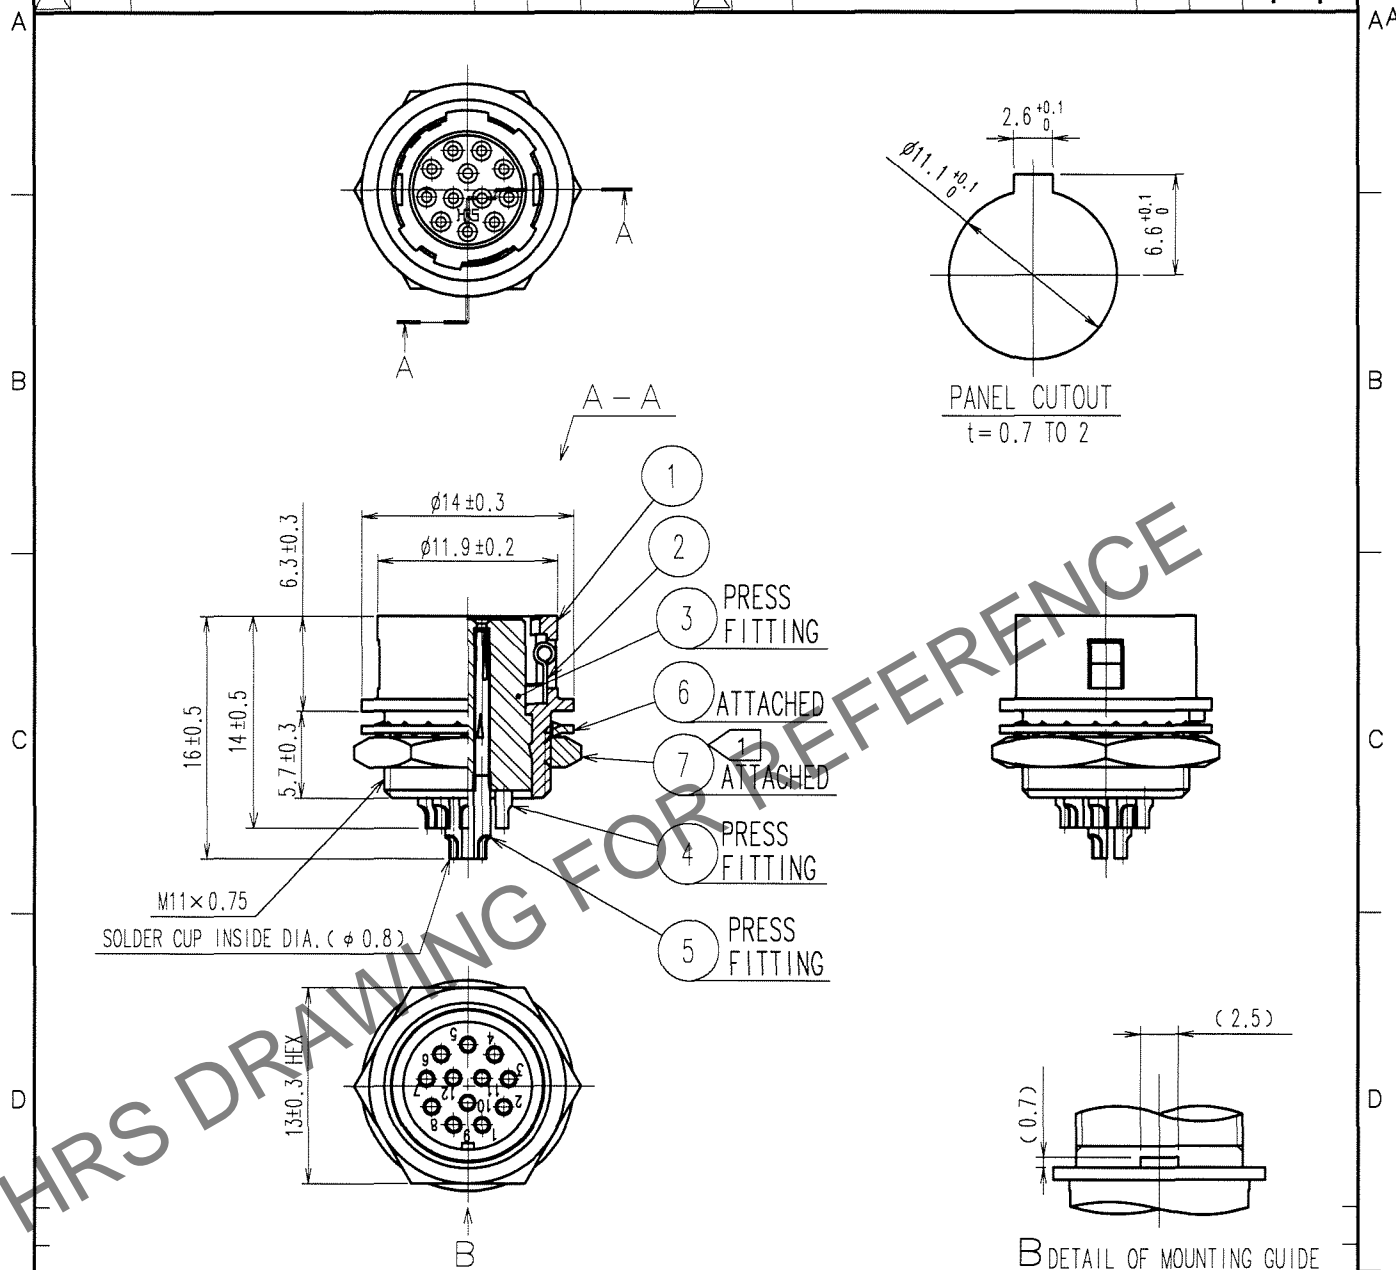

NOTE 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ : 2N · m.  
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO  
PREVENT REF. NO. ⑦ FOR LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	PHOSPHOR BRONZE	SILVER PLATING 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	4	PHOSPHOR BRONZE	

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		M.SATO	T.HORII	E.KUNII	M.SATO	
		'07.03.26	'07.03.27	'07.03.27	'07.03.28	

DRAWING NO.	EDC4-042712-71	PART NO.	HR10G-10R-12S(71)
SCALE	2 : 1	CODE NO.	CL110-1609-3-71
UNITS	mm		

HRS

HIROSE ELECTRIC CO., LTD.

CL110-1609-3-71

FORM NO. 228