


1		2			3		4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△ 1	DIS-C-000585	T.K	E.K	07.07.27	△				. .
△					△				. .
△					△				. .

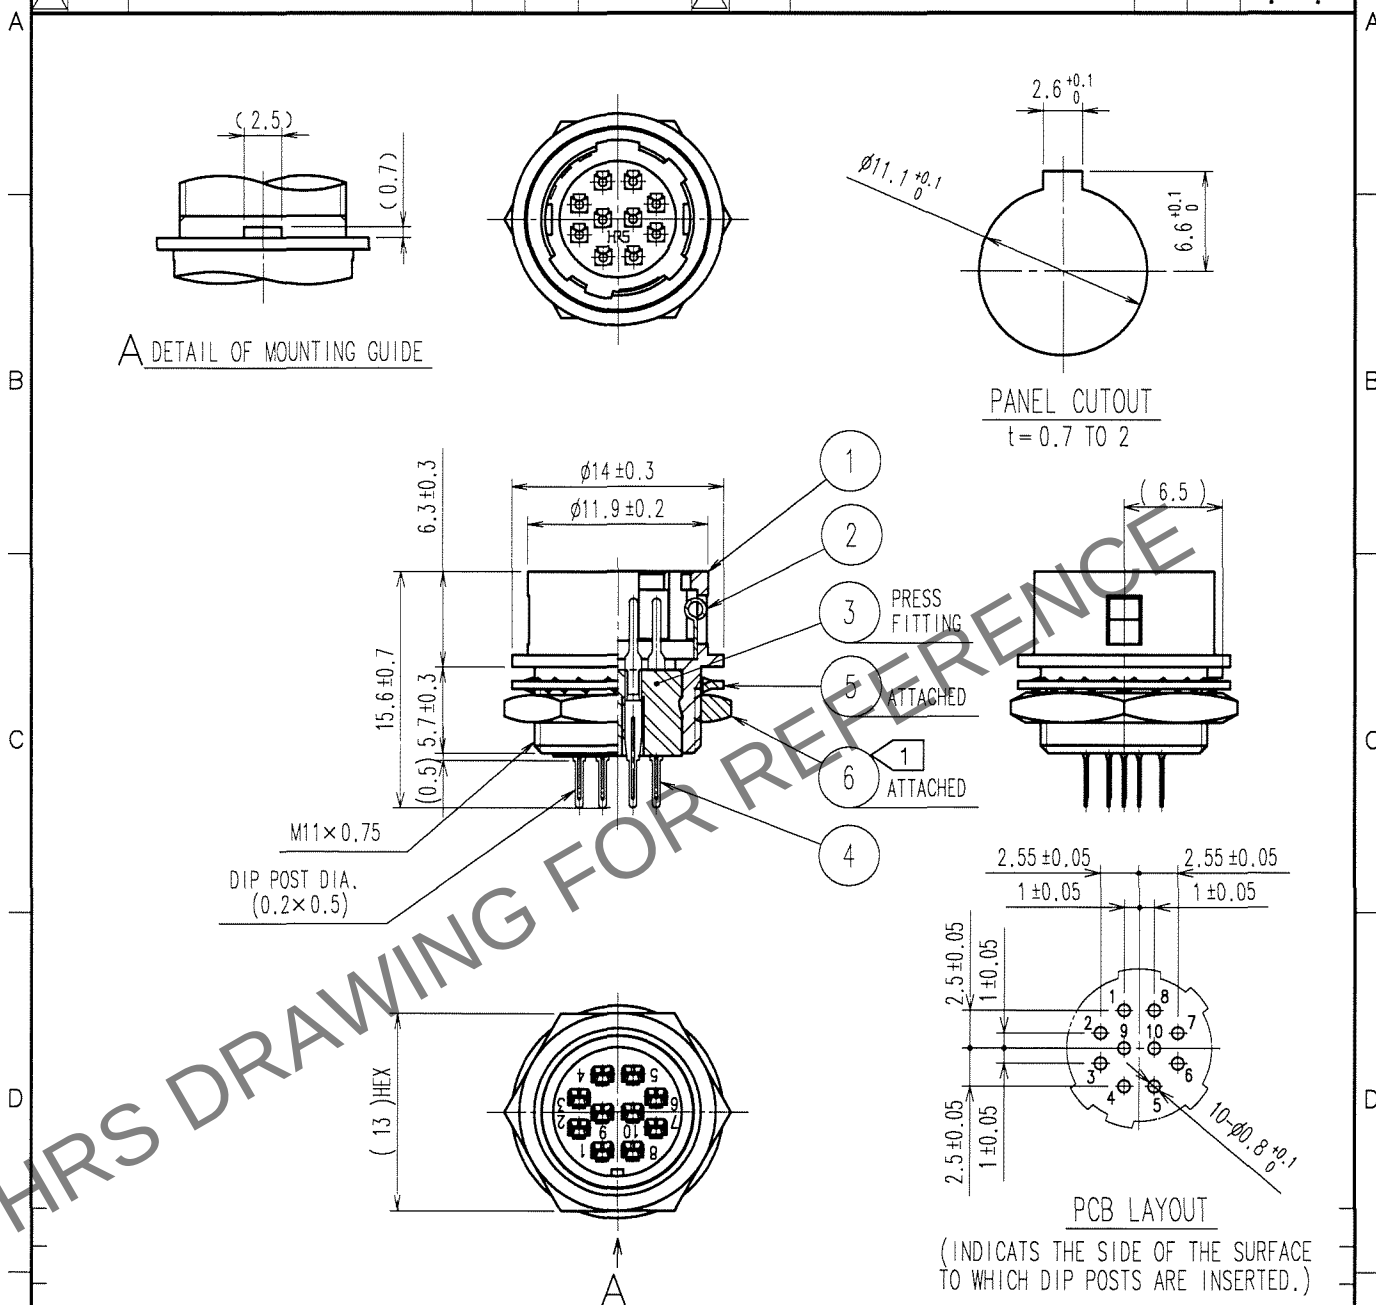


NOTE ① THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑥ : 2N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO. ⑥ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKLE PLATED	4	PHOSPHOR BRONZE	SILVER PLATING 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		M.SATO	T.HORII	E.KUNII	M.SATO	
		'07 04 11	'07 04 11	'07 04 11	'07 04 11	

DRAWING NO.		PART NO.	
EDC4-042755-71		HR10G-10R-10PB(71)	
CODE NO.		CL110-1808-0-71	
1		1	



SCALE
2 : 1

UNITS
mm

HRS

HIROSE ELECTRIC CO., LTD.