



Oct.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1	2	3	4						
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

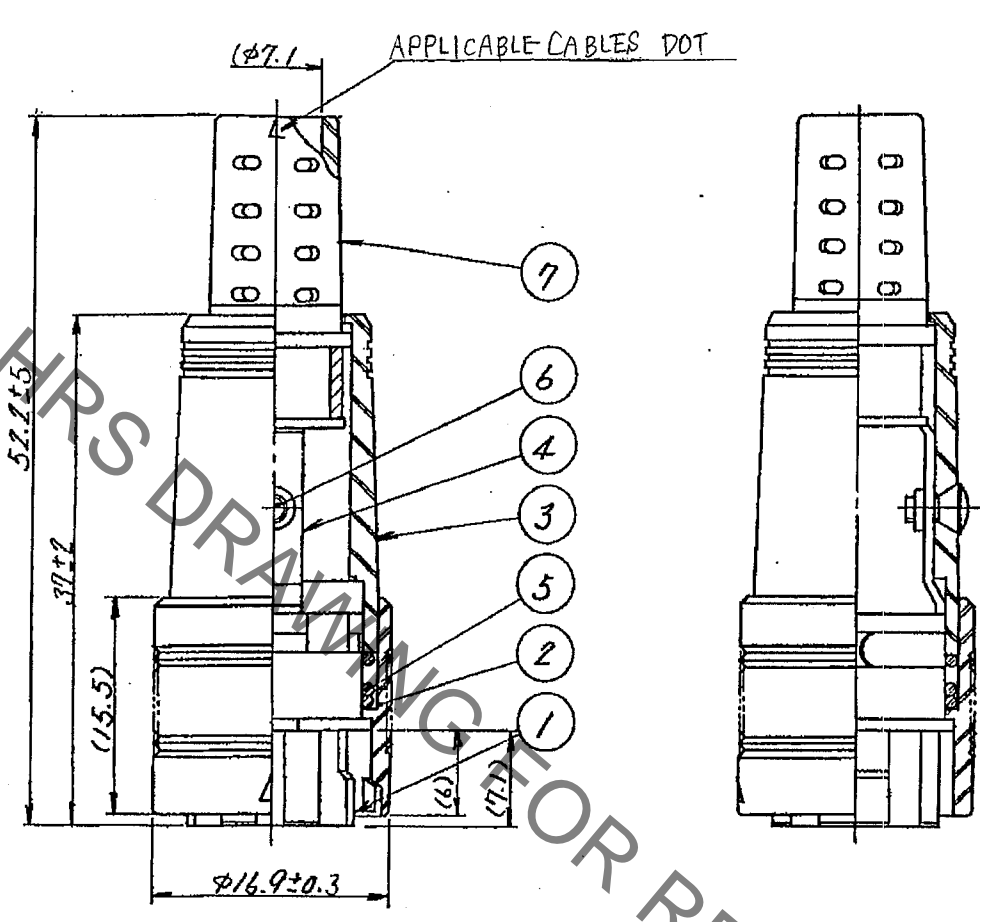

NOTE 1 APPLICABLE CRIMP CONTACT:  
 CONTACT No.1 TO 11  
 RP13A-SC-222(APPLICABLE WIRE : AWG#24 TO #28)  
 CONTACT No.12,13  
 RP13A-SC-212(APPLICABLE WIRE : AWG#18 TO #22)  
 2 EXTRACTION TOOL : RP13A-SC-TP (CL150-0022-8)  
 3 SHALL BE DISASSEMBLED WHEN DELIVERED .

4	BRASS			7	FLEXIBLE POLYVINYL (BLACK) CHLORIDE
3	POLYCARBONATE (BLACK) UL94V-0			6	BRASS (BLACK) CHROMATE TREATMENT (TRIVALENT CHROMIUM) JIS B 1111 M2×0.4×4
2	POLYCARBONATE (BLACK) UL94V-0			5	STEEL NICKEL PLATING
1	POLYCARBONATE (BLACK) UL94V-0				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN M. Ishihara 05.09.26	DESIGNED E. Yamino 05.09.26	CHECKED H. Zemba 05.09.27	APPROVED M. Sato 05.09.28	RELEASED
----------------------	--	----------------------------------	-----------------------------------	---------------------------------	---------------------------------	----------

SCALE 2 : 1	DRAWING NO. EDC4-028082-71	PART NO. RP13A-12PK-13SC(71)
	UNITS mm	CODE NO. CL113-1006-7-71



HIROSE ELECTRIC CO., LTD.