


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

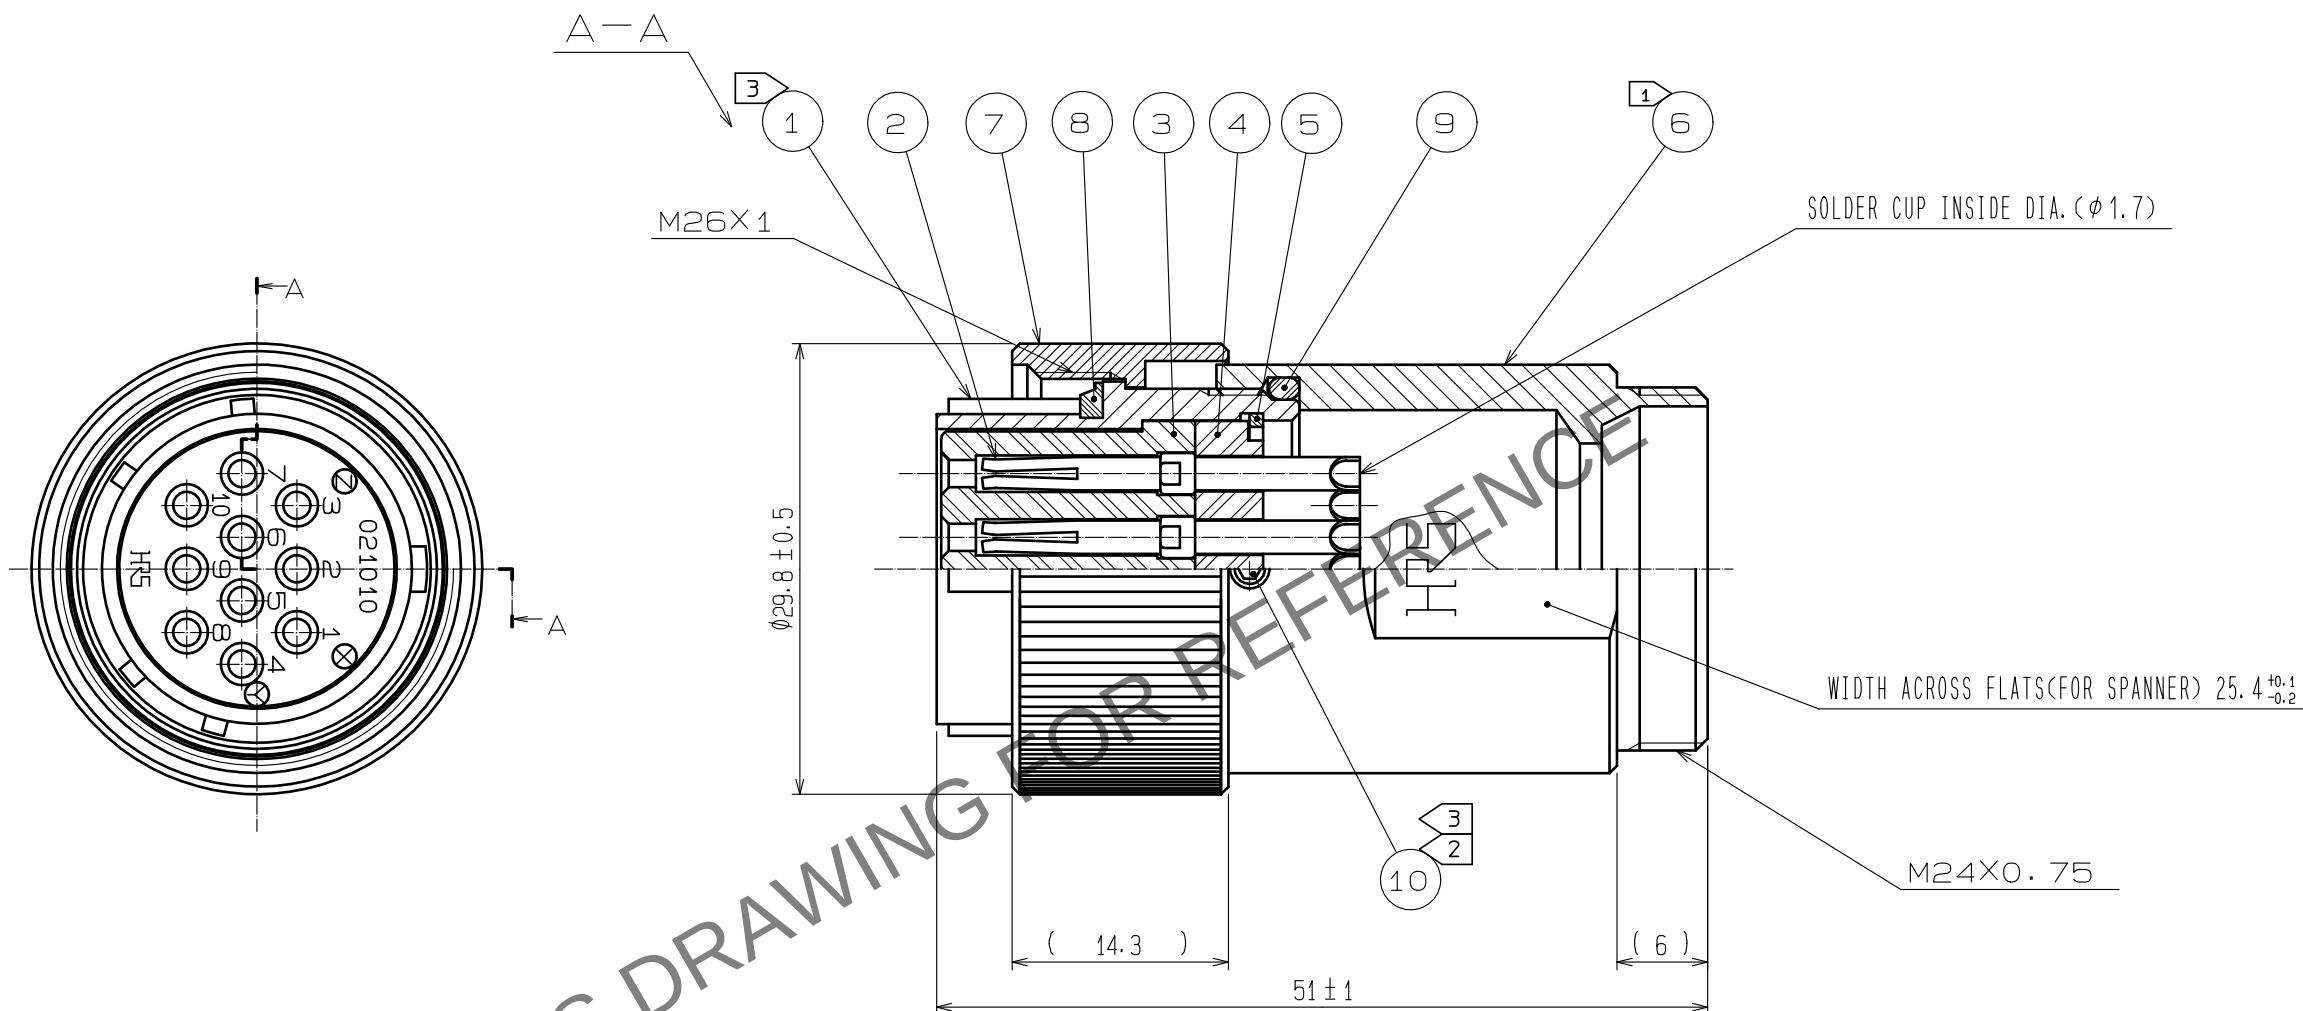

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑥ : 4 TO 4.5 N · m.
 - 2 ACROSS FLATS OF HEAGON SOCKET OF REF. NO. ⑩ : 1.27
THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩ : 0.2 TO 0.25 N · m.
 - 3 LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ① AND NO. ⑩ FROM LOOSENING.
 - 4 POSITIONAL RELATIONSHIP IN ROTATIONAL DIRECTION BETWEEN REF. NO. ① AND ⑥ SHOWS AN EXAMPLE.
 - 5 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR21WCC-**.
** DESIGNATE DIAMETER OF APPLICABLE.
 - 6 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER.
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL						
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
2	COPPER ALLOY	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING					
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.						APPROVED	HY. KOBAYASHI	18. 02. 26	DRAWING NO. EDC-110571-31-00	
						CHECKED	HY. KOBAYASHI	18. 02. 26	PART NO. JR21WP-10S(31)	
						DESIGNED	TH. KAMEYA	18. 02. 23	CODE NO. CL114-2016-2-31	
						DRAWN	MK. INOUE	18. 02. 23	 1/1	