


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

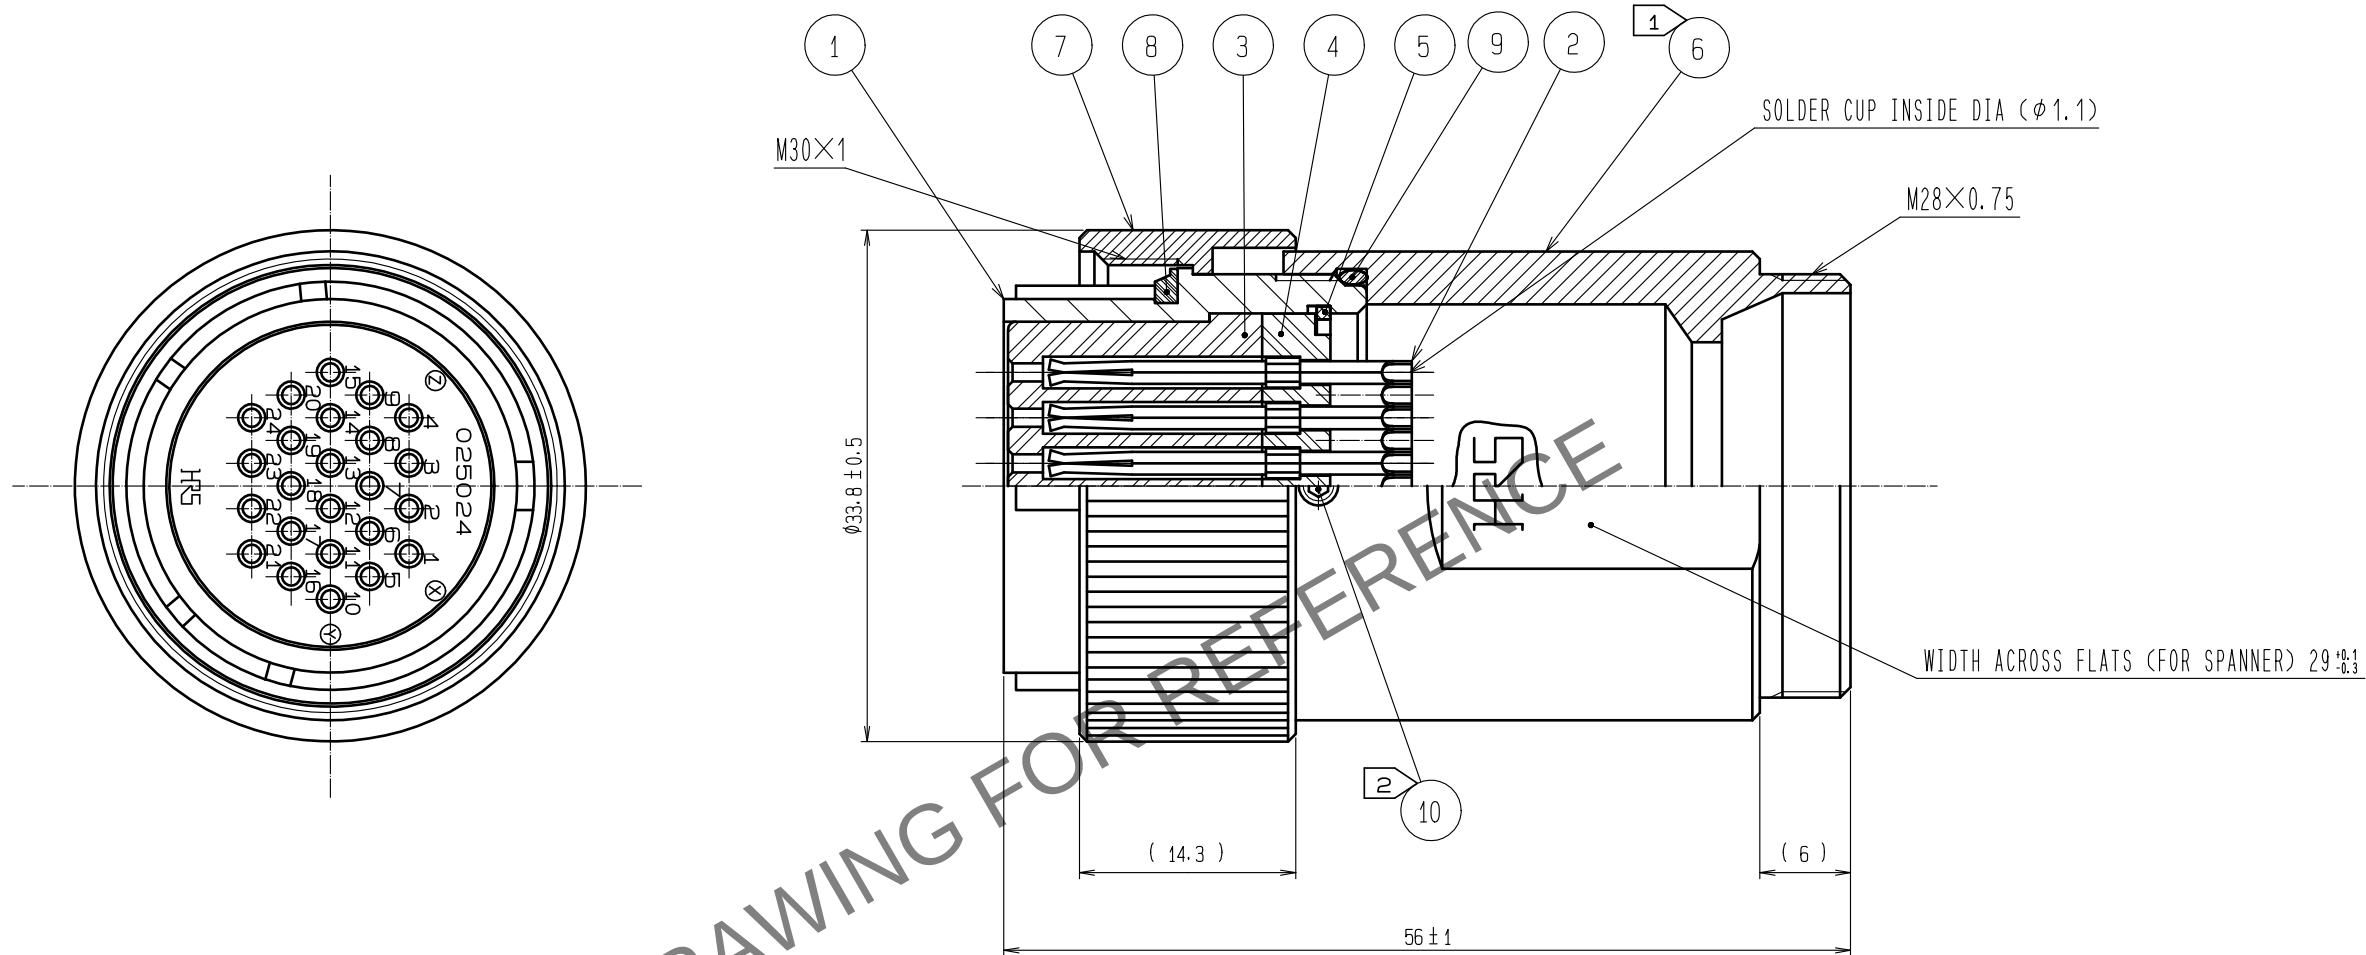

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑥ : 5 TO 5.5N · m.
 - 2 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩ : 0.2 TO 0.25N · m.
 - 3 ROTATION EXAMPLES OF REF. NO. ① AND NO. ⑥ ARE SHOWN.
 - 4 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑥ AND NO. ⑩ FROM LOOSENING.
 - 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑤ TO REF. NO. ① IS SHOWN.
 - 6 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR25WCC-**(31).
 - 7 **DESIGNATE DIAMETER OF APPLICABLE.
 - 8 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
 - 9 PLEASE CONFIRM BEFORE THE USE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS	HEX:1.27
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	ACRYLONITRILE BUTADIENE RUBBER	(GLAY)
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(GLAY)
2	COPPER ALLOY	SILVER PLATING 2μm	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	18.02.22	DRAWING NO. EDC-110576-31-00
		CHECKED	HY. KOBAYASHI	18.02.22	PART NO. JR25WP-24S(31)
		DESIGNED	TH. KAMEYA	18.02.21	CODE NO. CL114-2022-5-31
		DRAWN	MK. INOUE	18.02.13	
		DESIGNED	HY. KOBAYASHI	18.02.22	
		CHECKED	HY. KOBAYASHI	18.02.22	
		DESIGNED	TH. KAMEYA	18.02.21	
		DRAWN	MK. INOUE	18.02.13	