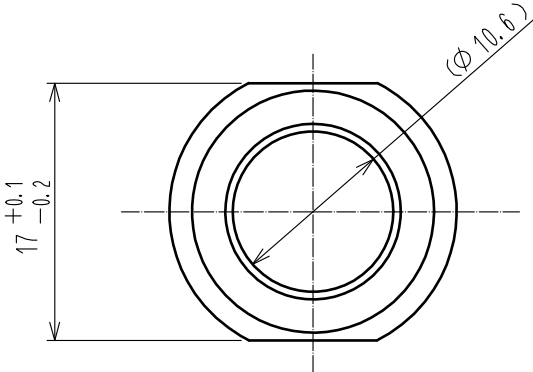
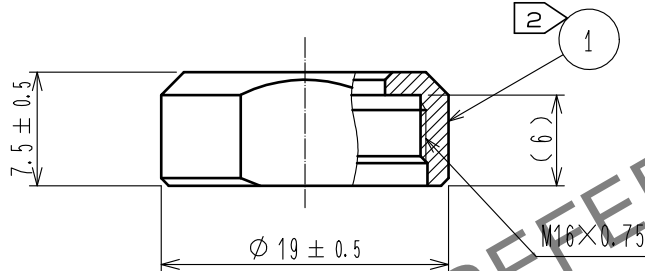
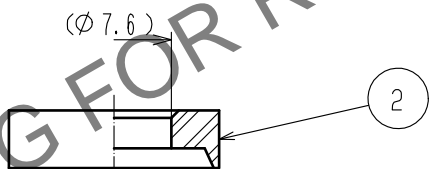
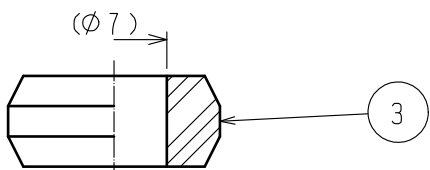



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2		3		4	
A							A
B							B
C							C
D							D
E							E
<p>Notes</p> <p>1 This product is delivered disassembled.</p> <p>2 The recommended clamp torque of Ref.No.① to be 2 to 2.5N·m. LOCTITE 263, Henkel Japan or equivalent is recommended to prevent Ref.No.① from loosening.</p> <p>3 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. please before the use.</p>							
2		POLYPHENYLENE SULFIDE		(BLACK)		UL94V-0	
1		BRASS		BLACK CROME PLATING		3	
NO.		MATERIAL		FINISH . REMARKS		NO. MATERIAL FINISH . REMARKS	
UNITS mm				SCALE 2 : 1		COUNT	
DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
APPROVED : HY. KOBAYASHI 18. 02. 26		DRAWING NO. EDC-110621-31-00		PART NO. JR13WCCA-7(31)		CODE NO. CL114-2072-3-31	
CHECKED : HY. KOBAYASHI 18. 02. 26							
DESIGNED : TH. KAMEYA 18. 02. 24							
DRAWN : MK. INOUE 18. 02. 14							
HRS HIROSE ELECTRIC CO., LTD.							
FORM HC0011-5-51		2		3		4	