
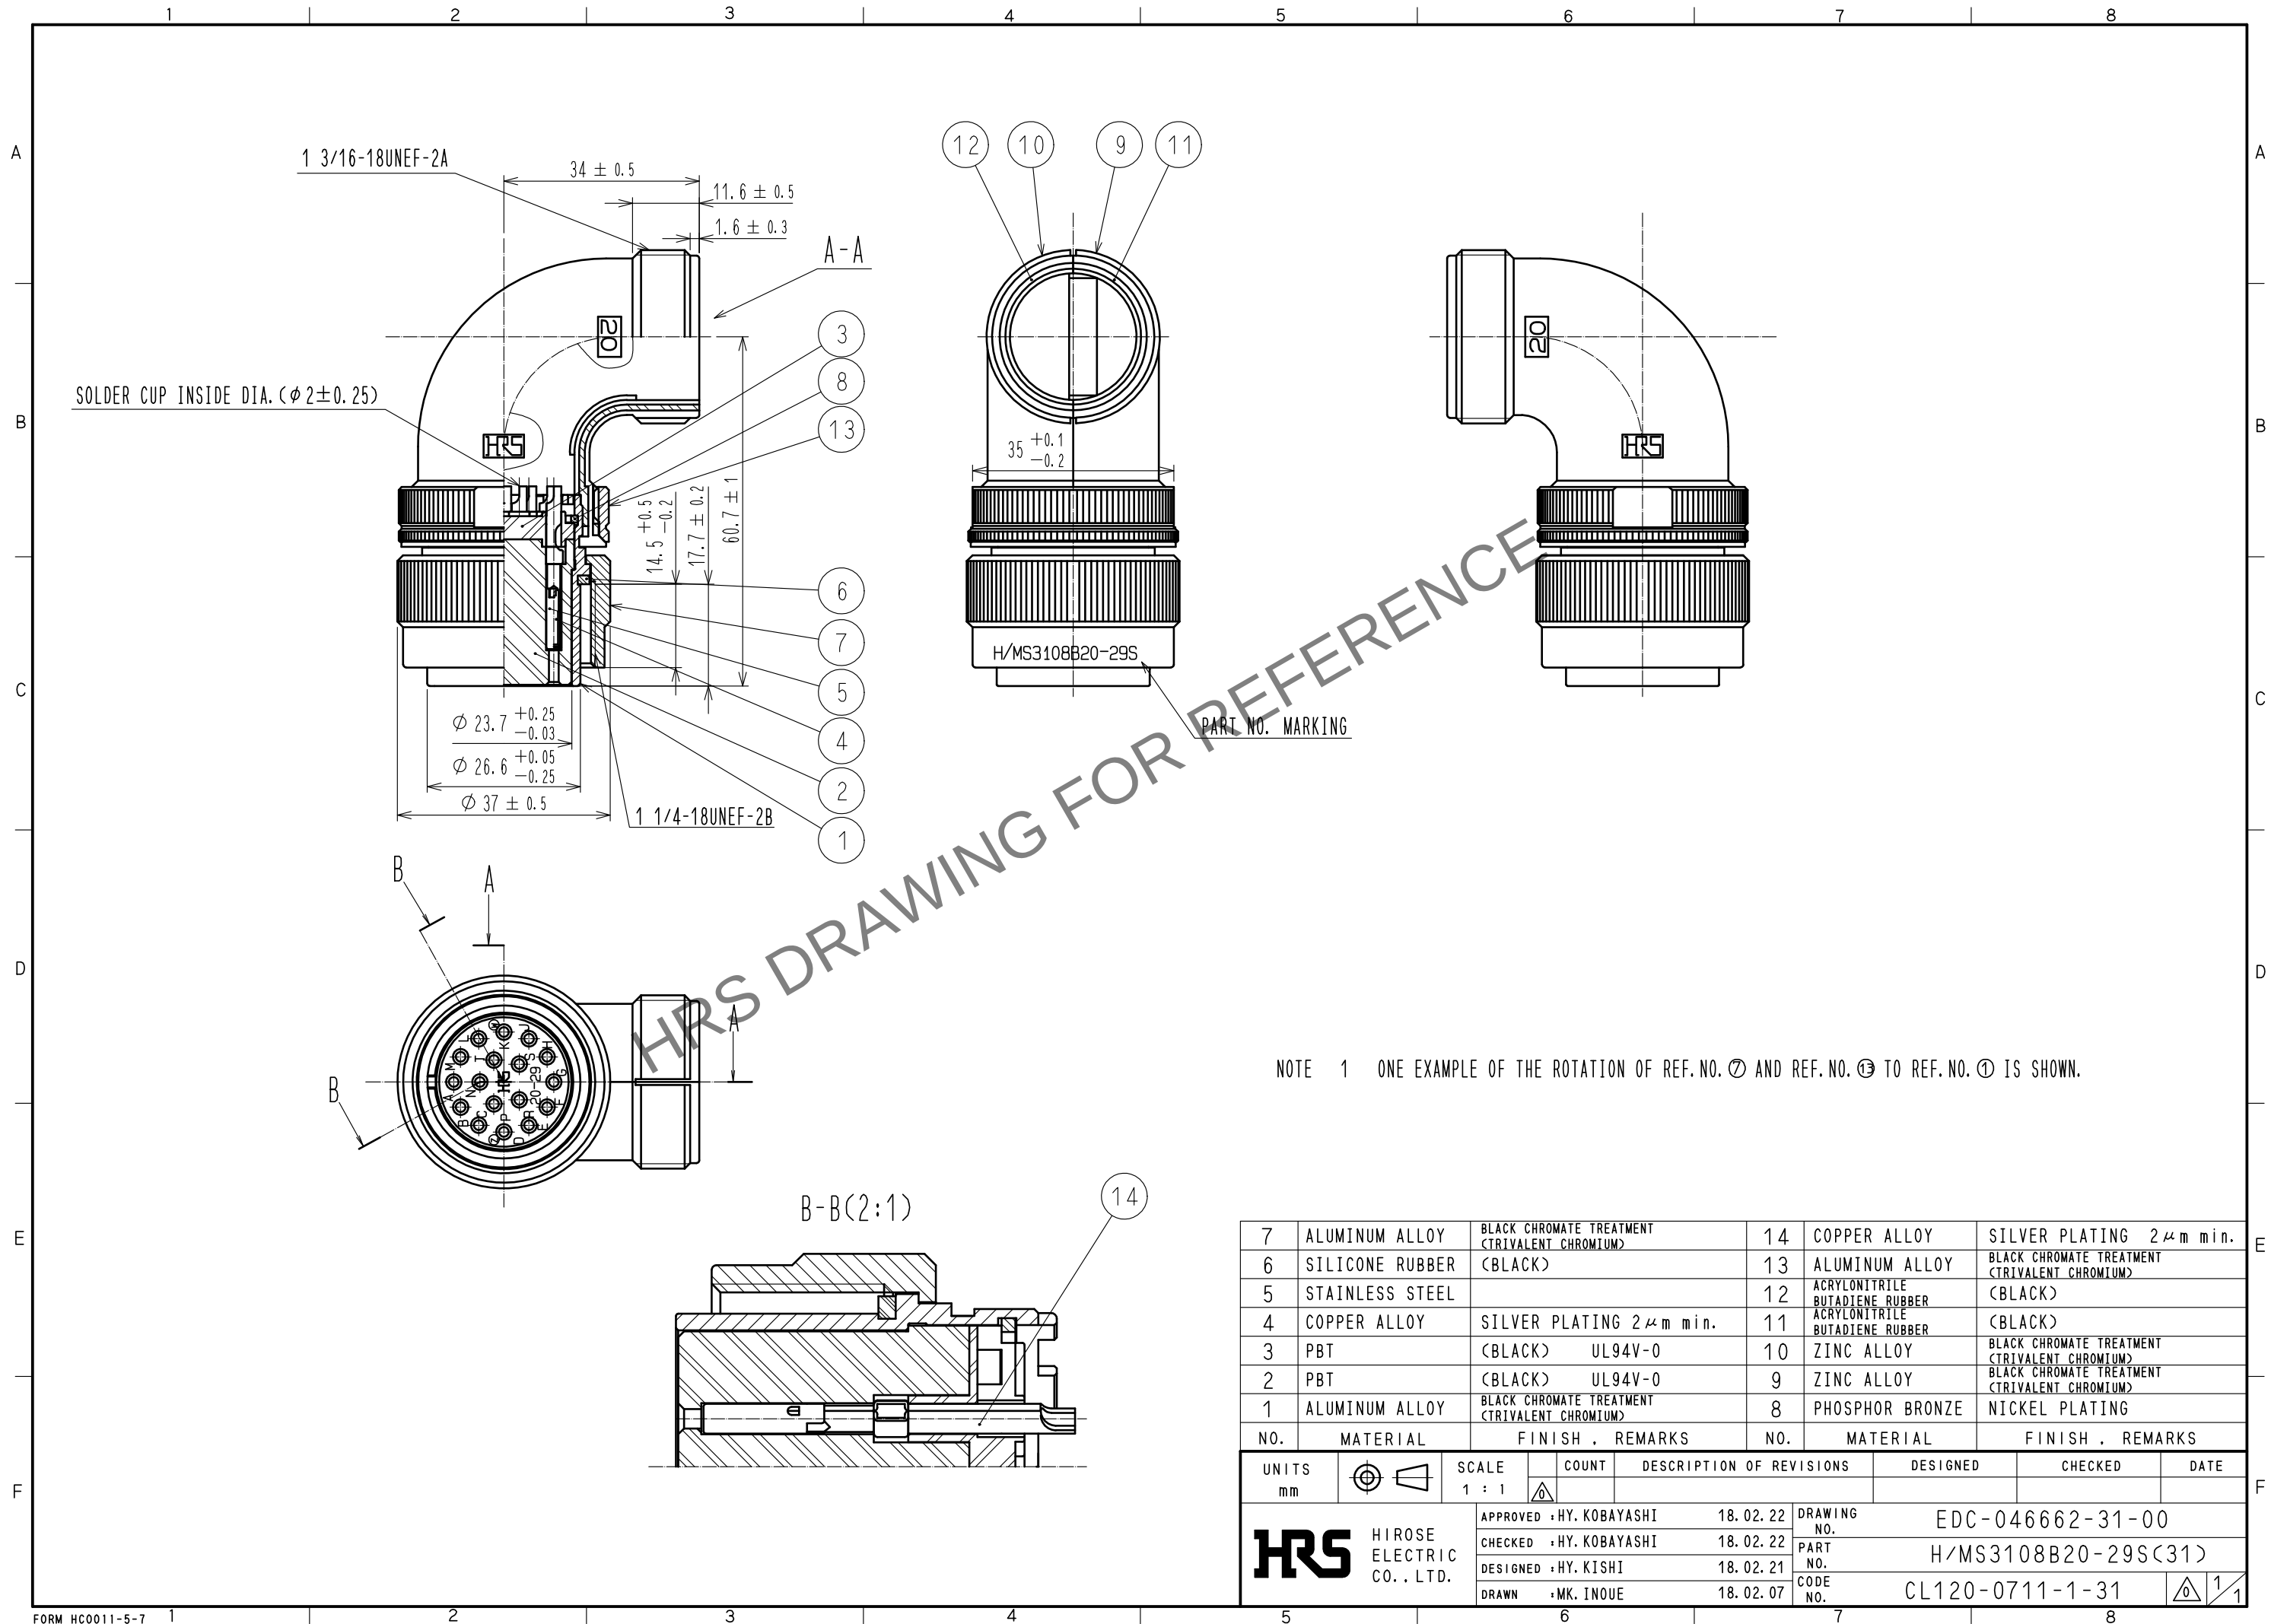


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 ONE EXAMPLE OF THE ROTATION OF REF.NO. ⑦ AND REF.NO. ⑬ TO REF.NO. ① IS SHOWN.

7	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)	14	COPPER ALLOY	SILVER PLATING 2μm min.					
6	SILICONE RUBBER	(BLACK)	13	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)					
5	STAINLESS STEEL		12	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
4	COPPER ALLOY	SILVER PLATING 2μm min.	11	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
3	PBT	(BLACK) UL94V-0	10	ZINC ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)					
2	PBT	(BLACK) UL94V-0	9	ZINC ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)					
1	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)	8	PHOSPHOR BRONZE	NICKEL PLATING					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 1 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.						APPROVED	HY. KOBAYASHI	18.02.22	DRAWING NO. EDC-046662-31-00	
						CHECKED	HY. KOBAYASHI	18.02.22	PART NO. H/MS3108B20-29S(31)	
						DESIGNED	HY. KISHI	18.02.21	CODE NO. CL120-0711-1-31	
						DRAWN	MK. INOUE	18.02.07	 1/1	