

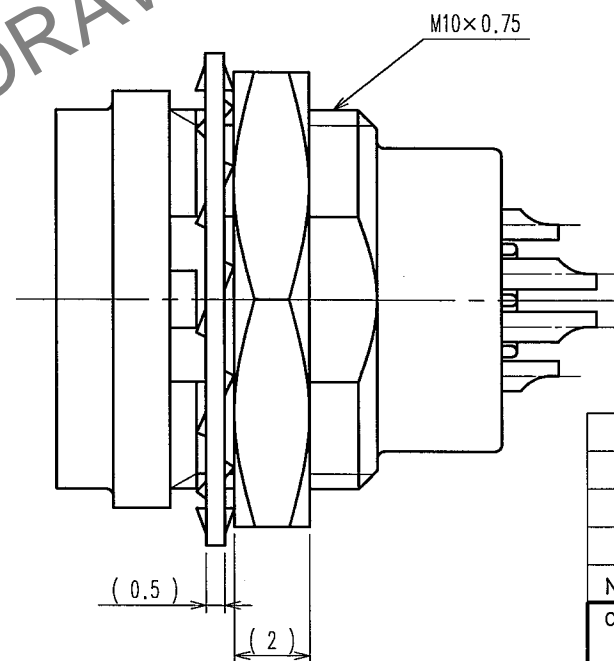
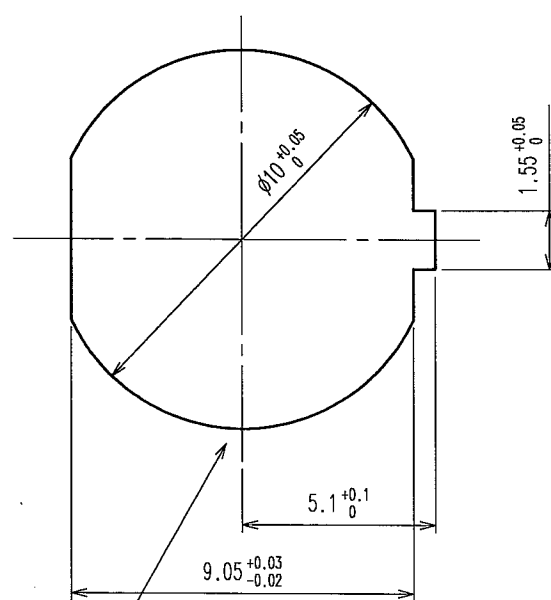
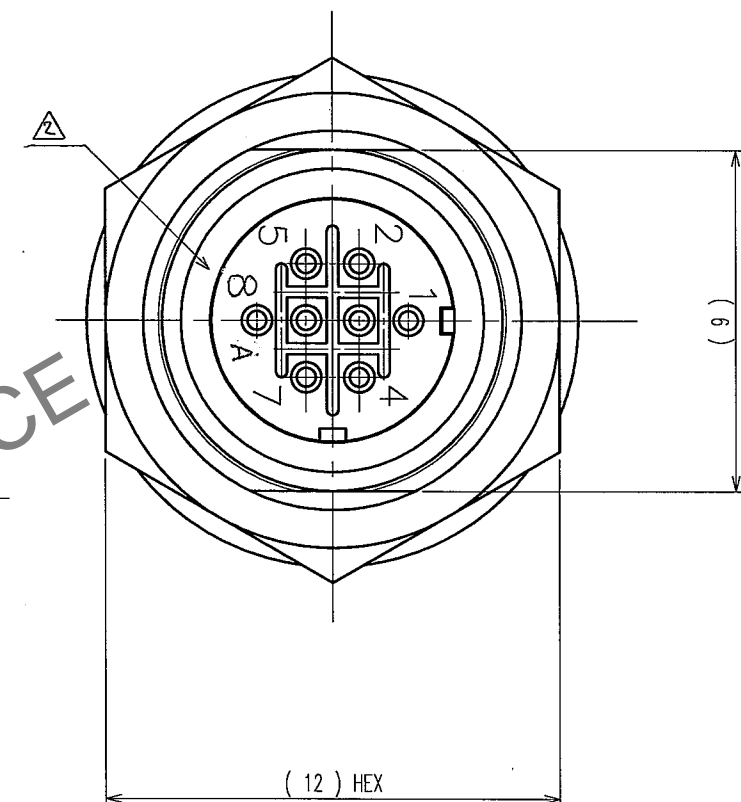


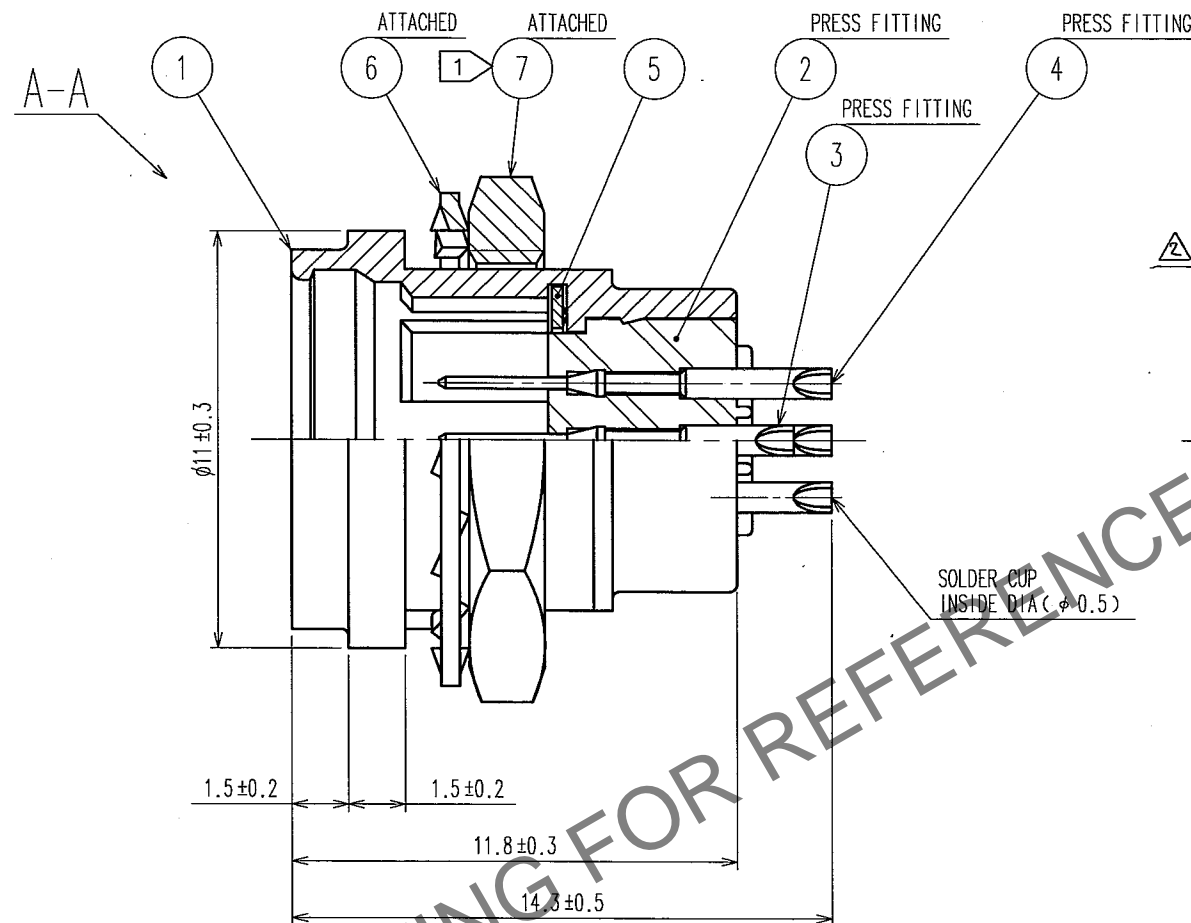

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	1	DIS-C-000585	T.K	E.K	07.07.27						. .
	2	DIS-C-001353	H.K	M.S	09.06.26						. .
											. .

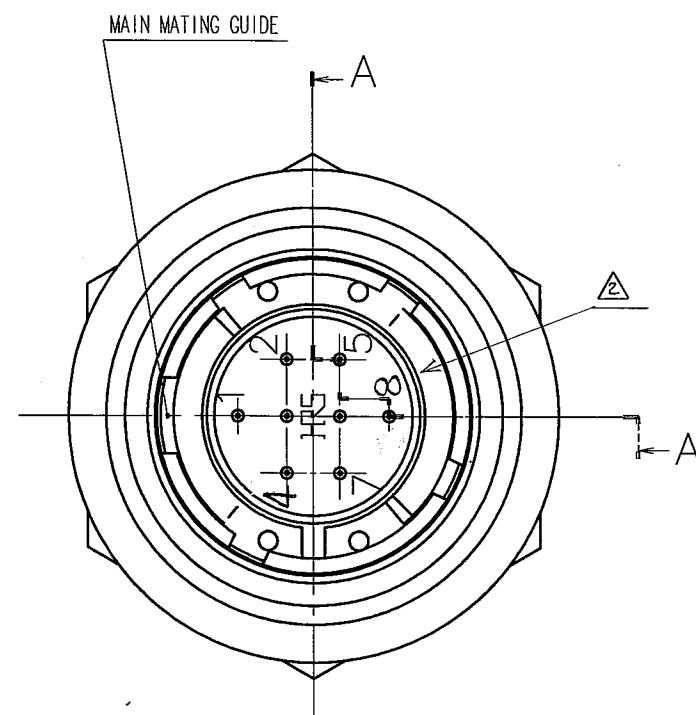

- NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑦ TO BE 1 N · m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED
TO PREVENT LOOSENESS.
- ② OVER PLATING : GOLD 0.2 μ m min.
UNDER PLATING : NICKEL 2 μ m min.

4	PHOSPHOR BRONZE	2			
3	PHOSPHOR BRONZE	2	7	BRASS 1	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) 94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	5	BERYLLIUM COPPER	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN M.SATO '06 09 20	DESIGNED Y.YAMADA '06 09 21	CHECKED E.EZAWA '06 09 21	APPROVED M.SATO '06 09 21	RELEASED . .
----------------------	------------------------------	-----------------------------------	---------------------------------	---------------------------------	--------------------

 SCALE 5 : 1 UNITS mm	DRAWING NO.	PART NO.
	EDC3-115062  HIROSE ELECTRIC CO., LTD	HR25A-7R-8P CODE NO. CL125-0620-0-00