


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

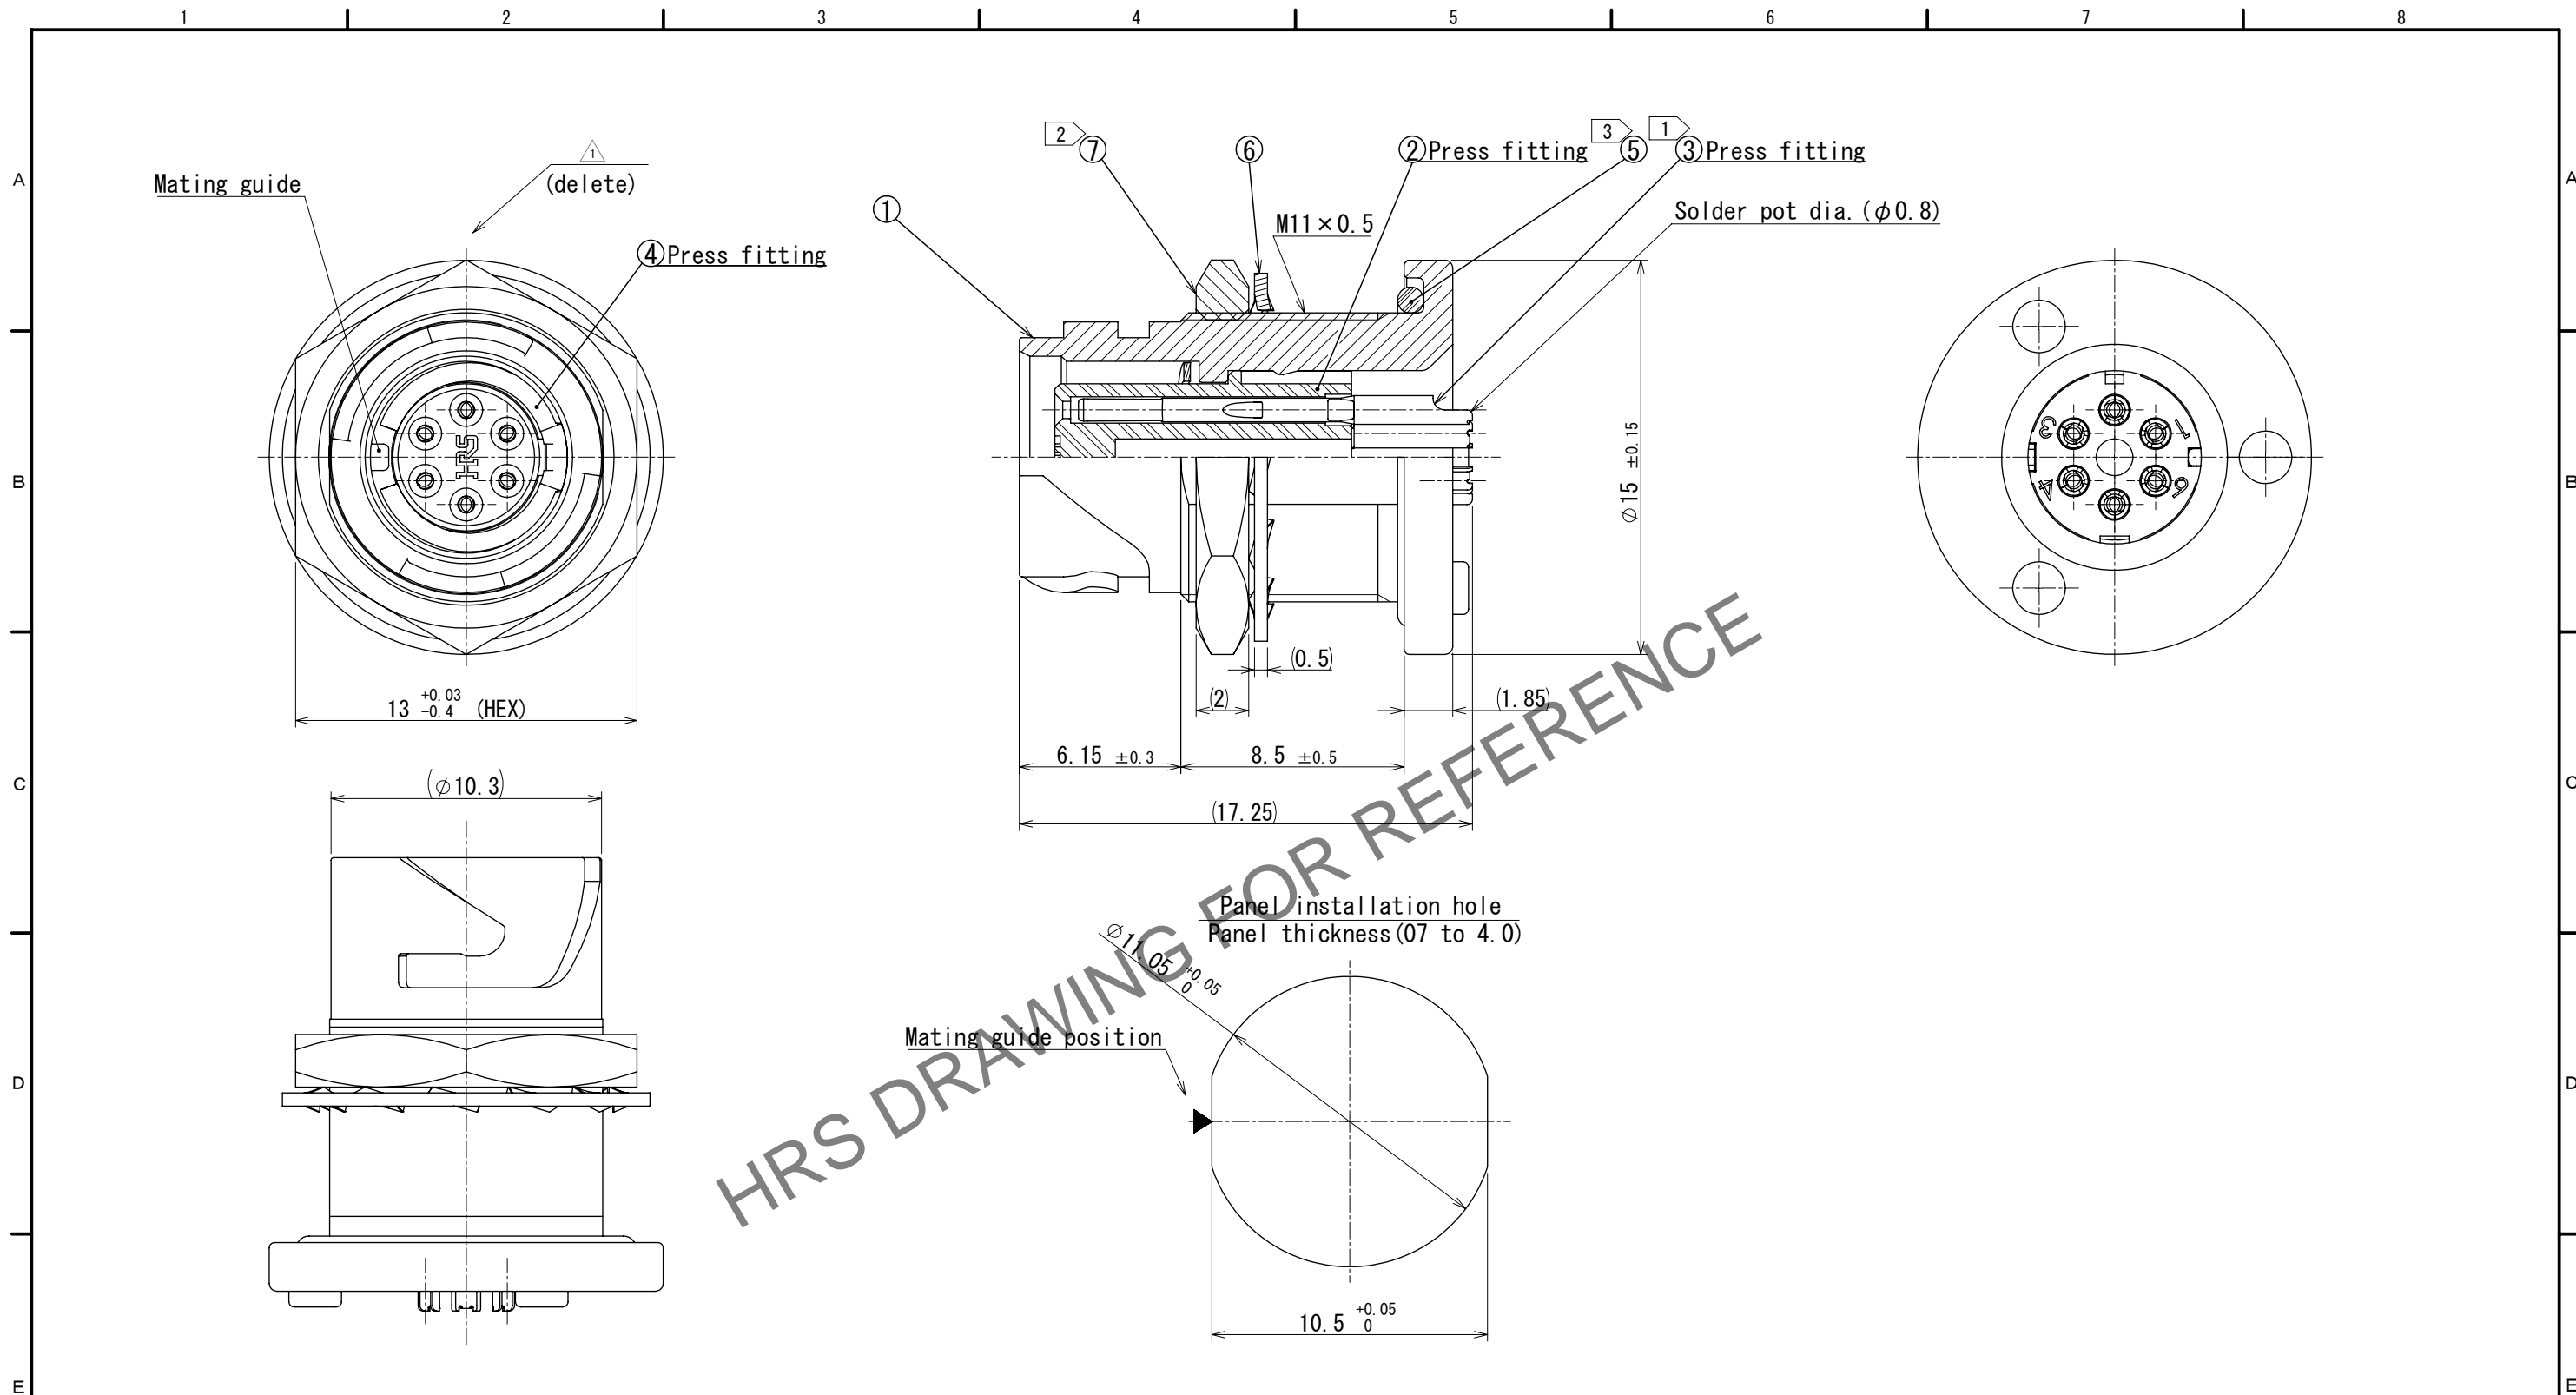

- Notes
- 1) Plating (Ref. No. 3)
Contact area : Gold 0.2 μm min.
Others : Gold and nickel.
Under plating: Nickel plating 2 μm min.
 - 2) The recommended clamp torque of ref. No. 7 to be 1.5 to 2 N·m.
Thread locker to threaded portion of ref. No. 1 is recommended to prevent ref. No. 7 from loosening.
Recommended thread locker : LOCTITE 263 , HENKEL JAPAN LTD.
 - 3) When this connector is mounted No to panel, be careful ref. No. 5 is assembled surely into the groove of ref. No. 5 as shown in this figure to keep waterproof effectiveness.

△ CAD change

4	Phosphor bronze	Nickel plating			
3	Phosphor bronze	1	7	Brass	Nickel plating
2	Polyphenylene sulfide	(Black) UL94V-0	6	Phosphor bronze	Nickel plating
1	Zinc alloy	Nickel plating	5	Chloroprene rubber	(Black)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00016163	DESIGNED Y.J. KOGA
		APPROVED : EJ. KUNII	2019. 03. 28	DRAWING NO.	EDC-387322-00-00
		CHECKED : EJ. KUNII	2019. 03. 28	PART NO.	LF07WBRB-6S
		DESIGNED : KN. IKEHARA	2019. 03. 27	CODE NO.	CL0136-0054-0-00
		DRAWN : KN. IKEHARA	2019. 03. 27		
					1/1