


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

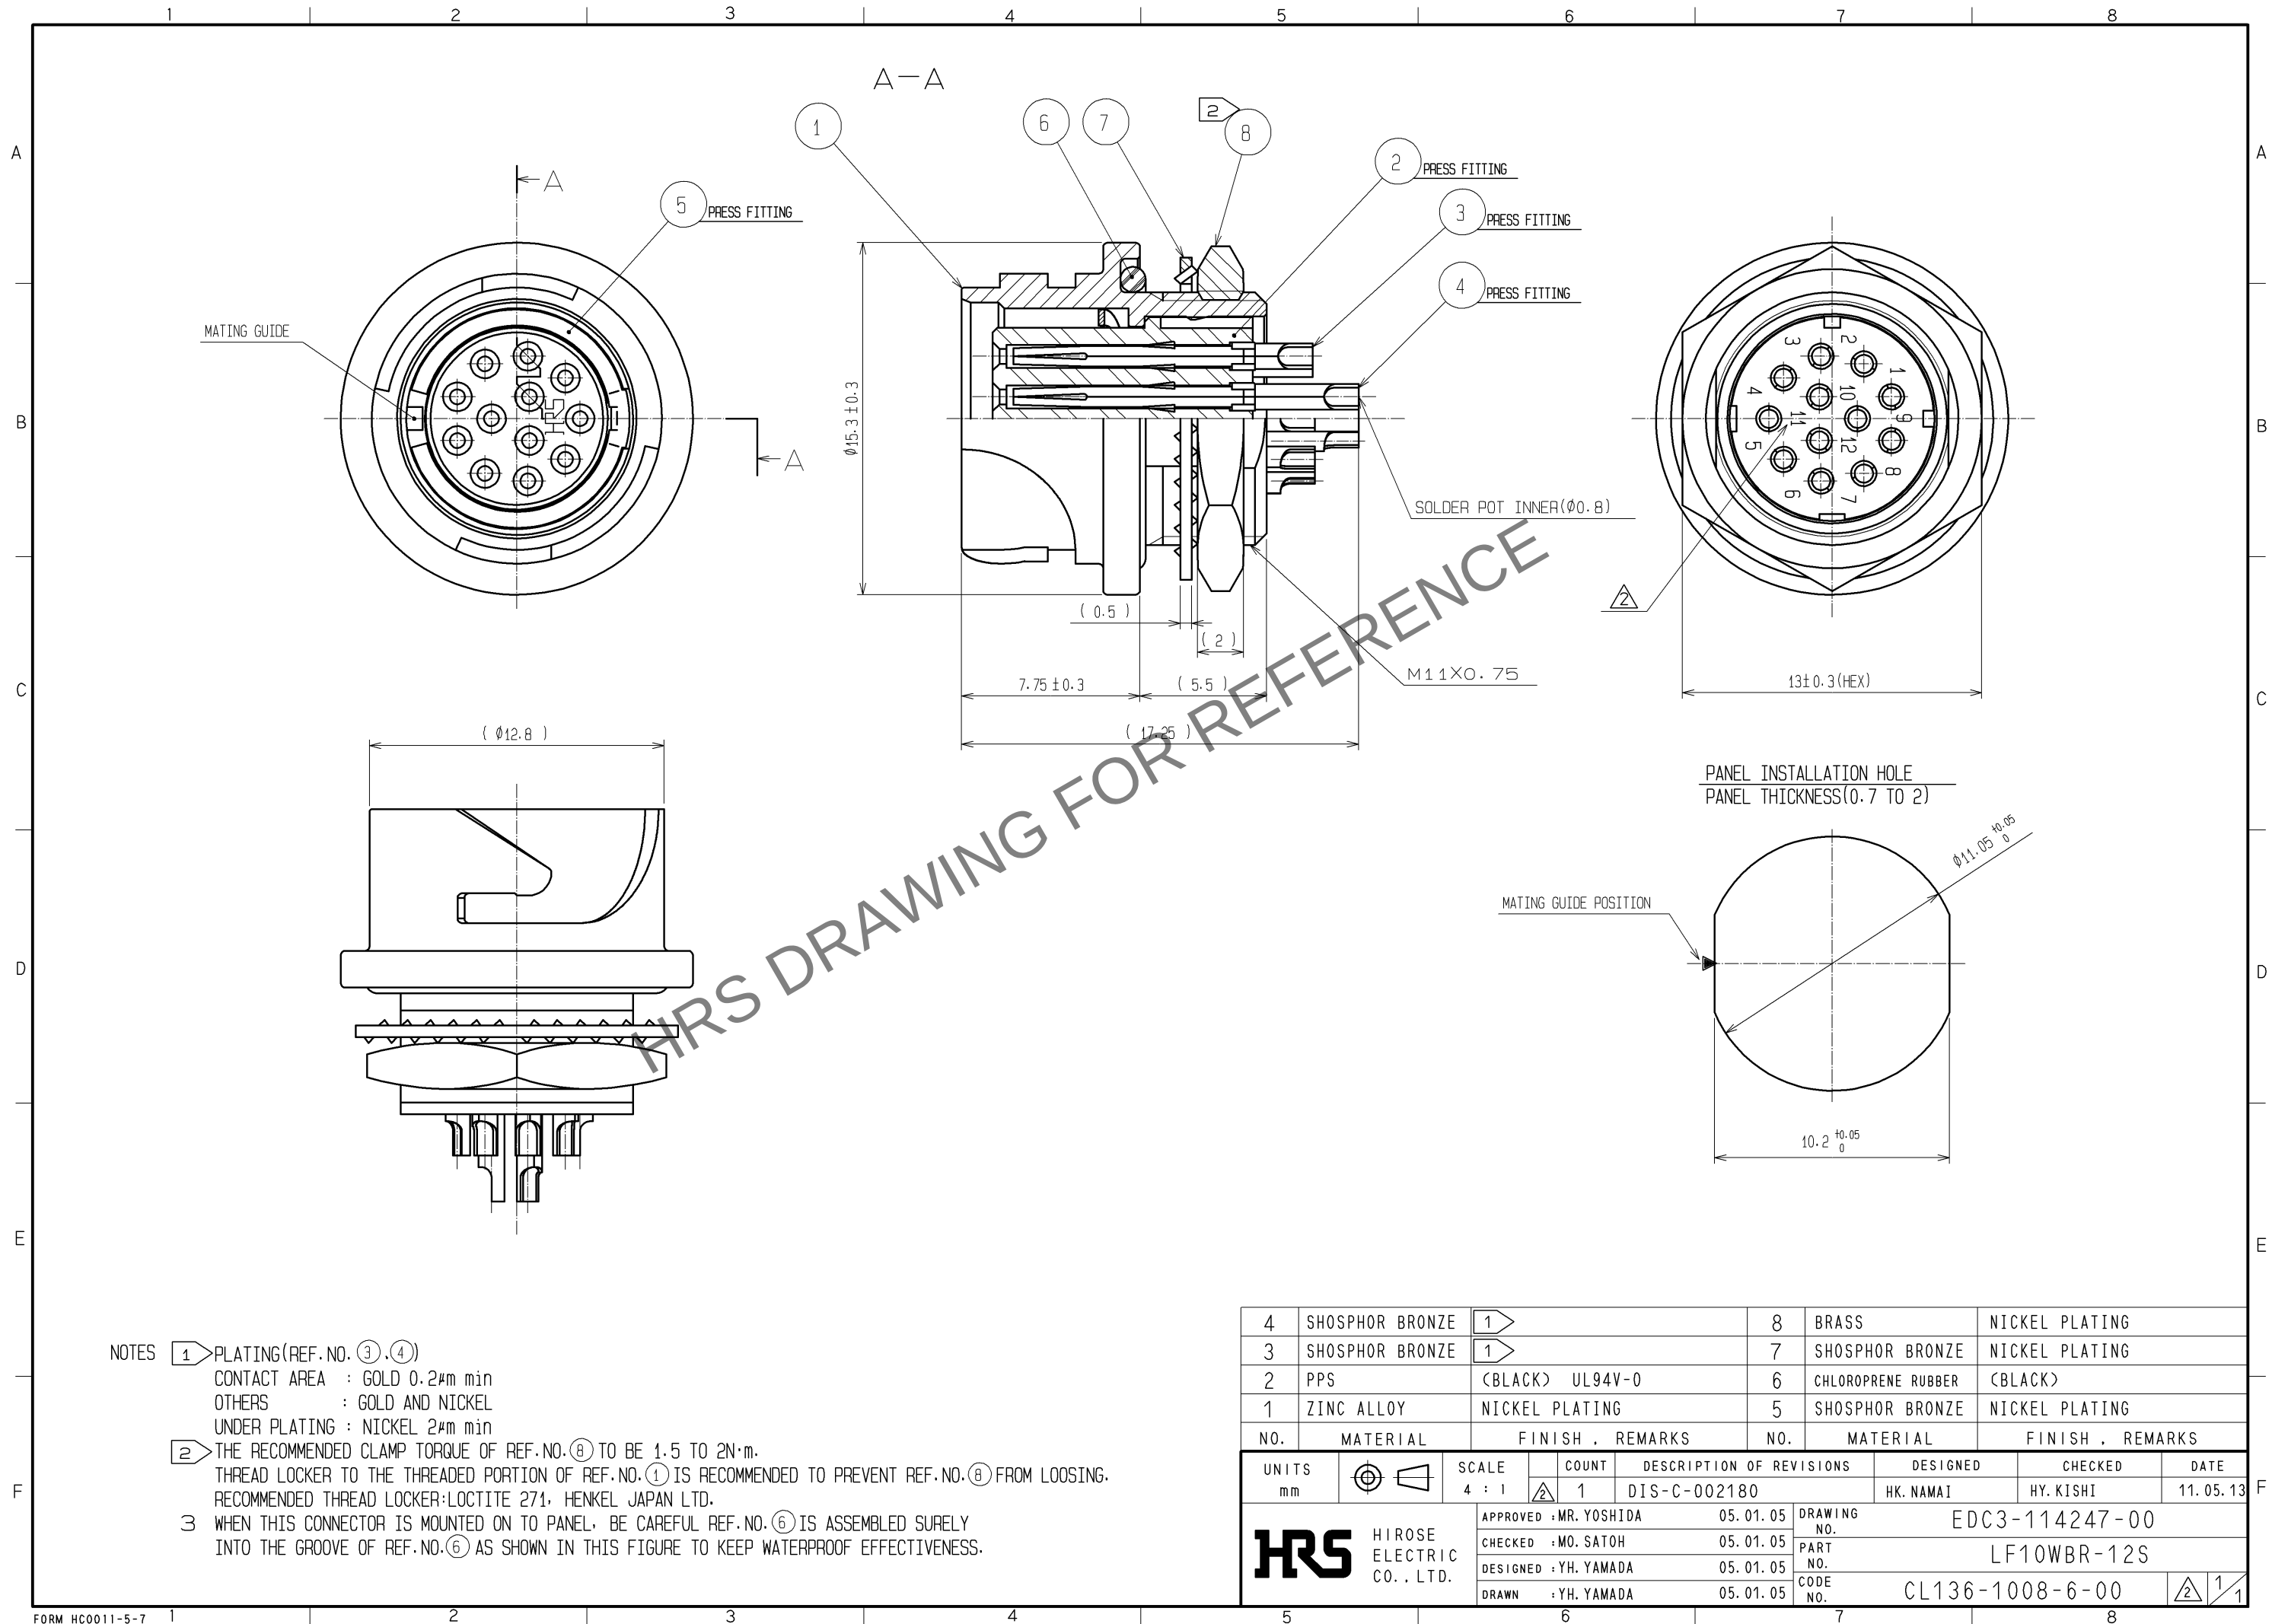

- NOTES
- 1 PLATING(REF.NO.③,④)
CONTACT AREA : GOLD 0.2μm min
OTHERS : GOLD AND NICKEL
UNDER PLATING : NICKEL 2μm min
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑧ TO BE 1.5 TO 2N·m.
THREAD LOCKER TO THE THREADED PORTION OF REF.NO.① IS RECOMMENDED TO PREVENT REF.NO.⑧ FROM LOOSING.
RECOMMENDED THREAD LOCKER:LOCTITE 271, HENKEL JAPAN LTD.
 - 3 WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF.NO.⑥ IS ASSEMBLED SURELY INTO THE GROOVE OF REF.NO.⑥ AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

4	SHOSPHOR BRONZE	1	8	BRASS	NICKEL PLATING
3	SHOSPHOR BRONZE	1	7	SHOSPHOR BRONZE	NICKEL PLATING
2	PPS	(BLACK) UL94V-0	6	CHLOROPRENE RUBBER	(BLACK)
1	ZINC ALLOY	NICKEL PLATING	5	SHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-002180	DESIGNED HK. NAMAI
		APPROVED : MR. YOSHIDA	05. 01. 05	DRAWING NO. EDC3-114247-00	CHECKED HY. KISHI
		CHECKED : MO. SATOH	05. 01. 05	PART NO. LF10WBR-12S	DATE 11. 05. 13
		DESIGNED : YH. YAMADA	05. 01. 05	CODE NO. CL136-1008-6-00	
		DRAWN : YH. YAMADA	05. 01. 05		