
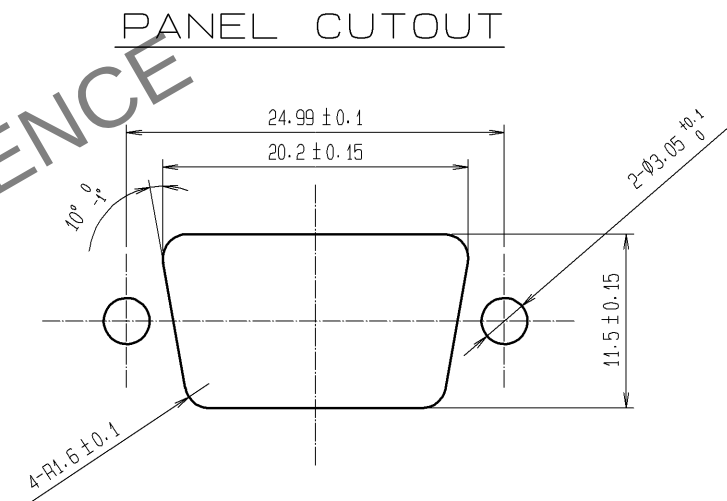
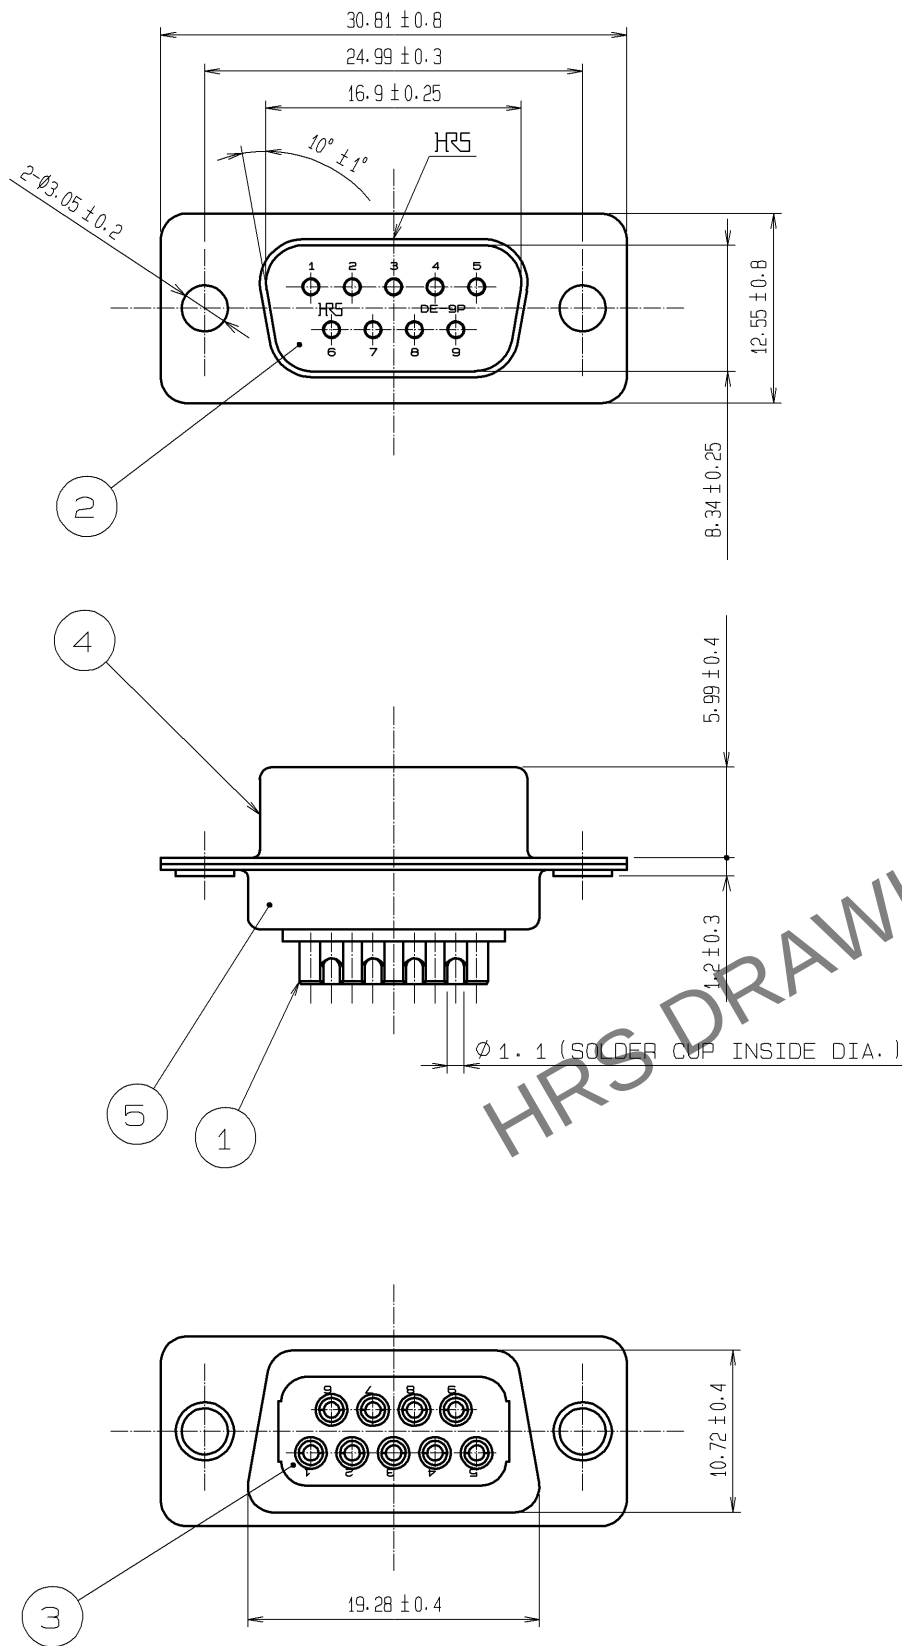


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1. SOLDERING SHALL BE DONE WIHT
SOLDERING BIT OF 40W MAX.

			OVER: Ni 1μm min UNDER Cu 5μm min		
2	PBT	(BLACK)UL94V-O	5	STEEL	
1	PHOSPHOR BRONZE	CONTACT: Au 0.2μm min	4	STEEL	OVER: Ni 1μm min UNDER Cu 5μm min
		OTHER: Au 0.03μm min			
		UNDER: Ni 2μm min	3	PBT	(BLACK)UL94V-O
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1					
 HIROSE ELECTRIC CO., LTD.		APPROVED : SR. KIKUTA		07. 11. 20	DRAWING NO. EDC3-009501-02		
		CHECED : YH. ENAMI		07. 11. 20	PART NO. HDEB-9P(05)		
		DESIGNED : MT. ITANO		07. 11. 20	CODE NO. CL211-0232-6-05		
		DRAWN : MT. ITANO		07. 11. 20	 1/1		