
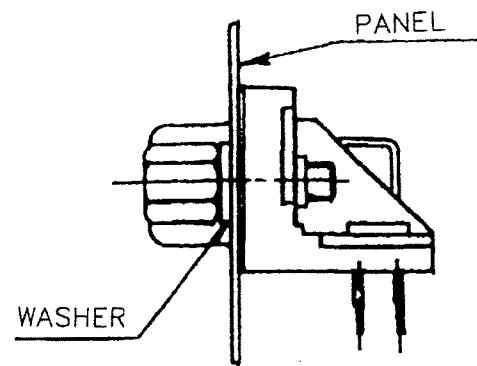


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
Q


A
B
C
D
E
F

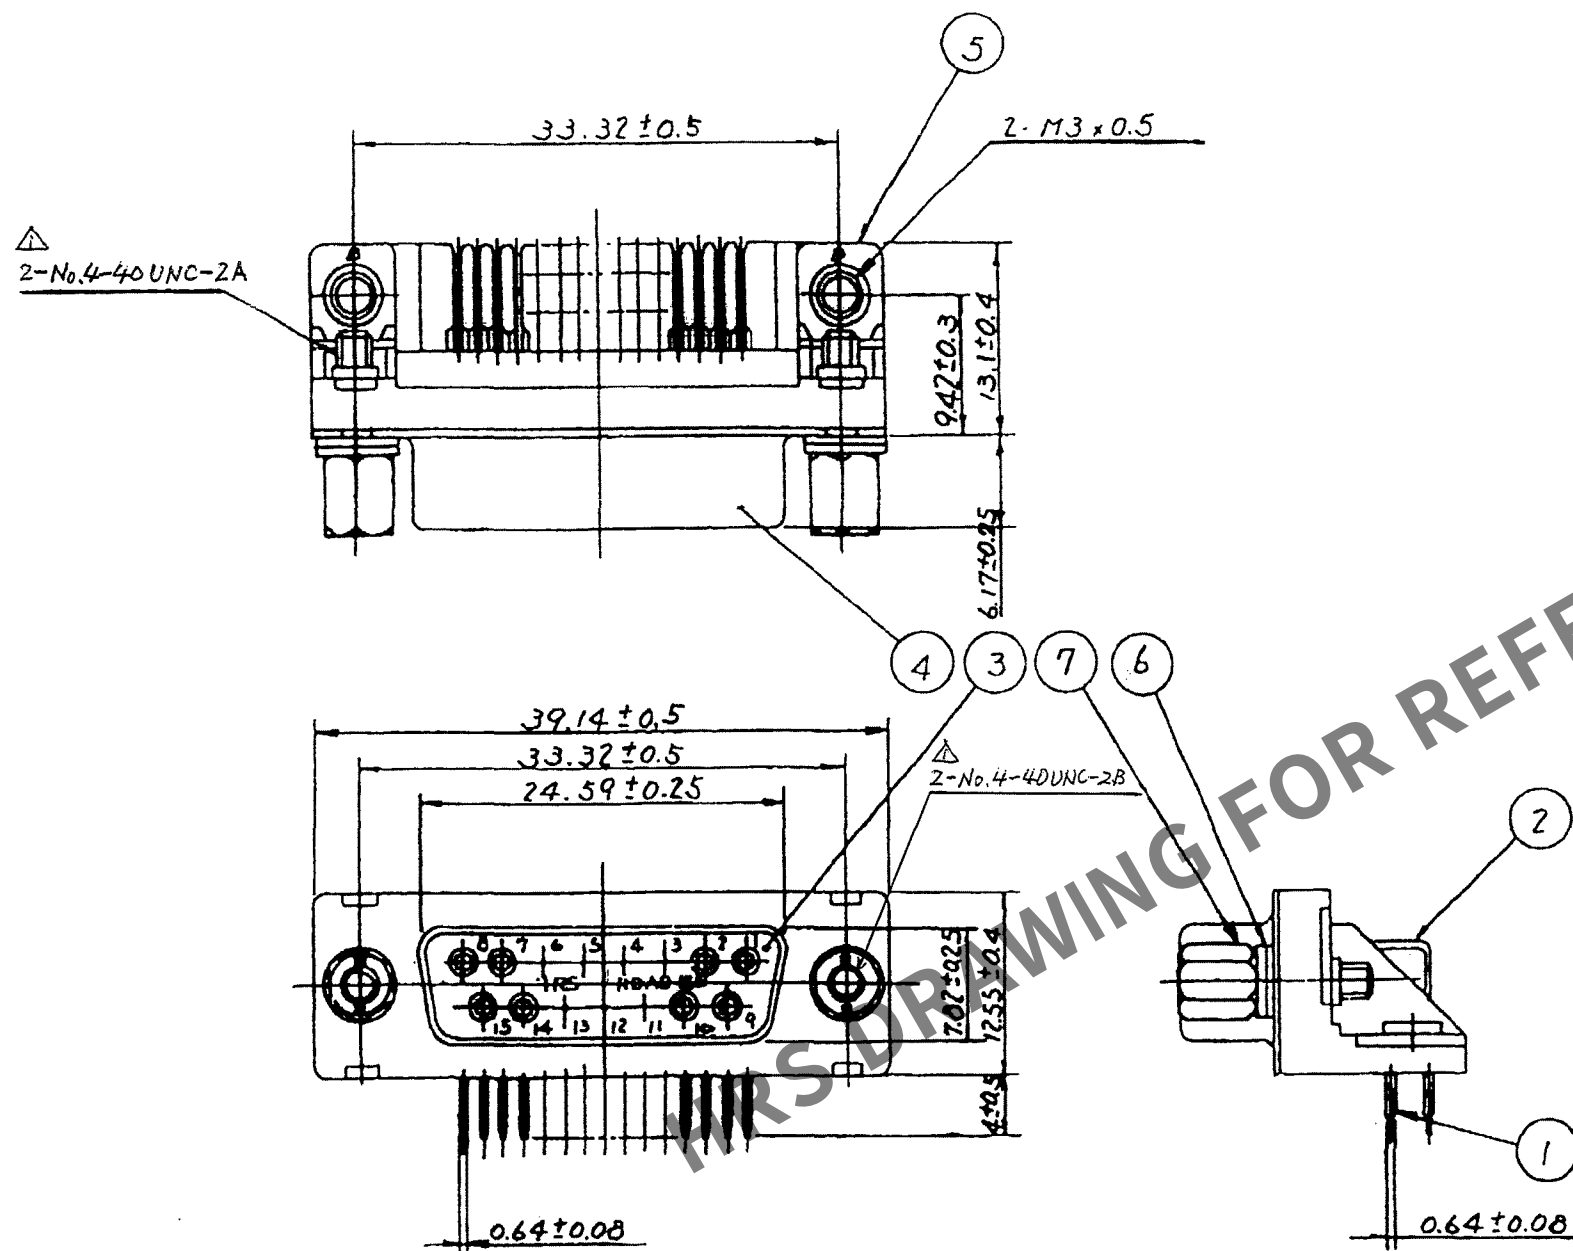

REMOVE ONE WASHER FOR 0.8-1.2 OF
PANEL THICKNESS. REMOVE TWO WASHERS
FOR 1.6 OF PANEL THICKNESS.

PATTERN OF MOUNTING CONNECTOR ON PCB

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-E-001777	K.H	S.M	07.8.31					

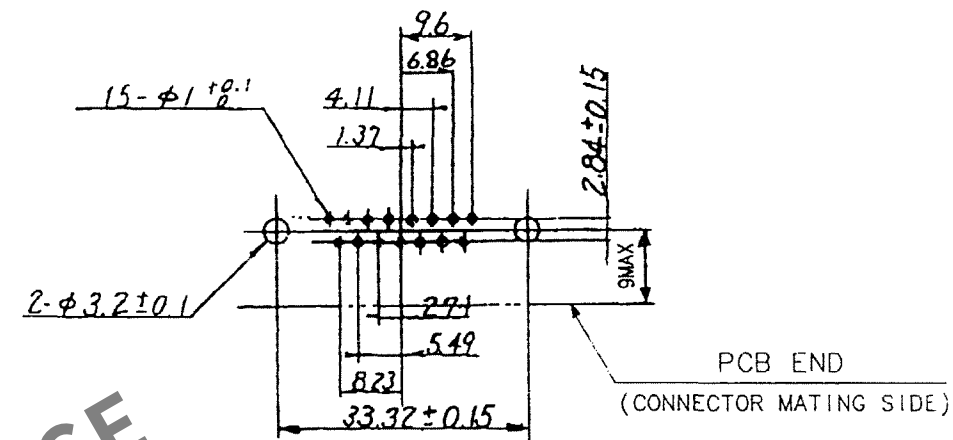

NOTE. PLEASE KEEP THE TOLERANCE TO LESS THAN ±0.1
FOR THE DIMENSIONS WITHOUT TOLERANCE.

RECOMMENDED PC BOARD HOLE PATTERN
(SCALE 1/1)

4	STEEL	NICKEL PLATING			
3	PBT	(BLACK) UL94V-0	7	STEEL	NICKEL PLATING
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm	6	STEEL	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm	5	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			T.KAMEYA	T.KAMEYA	Y.ENAMI
			03.08.07	03.08.07	03.08.08
					H.MIWA
					03.08.09
DRAWING NO.			PART NO.		
EDC3-021146-02			RDAD-15S-LNA(4-40)(55)		
SCALE			CODE NO.		
2 : 1			CL211-0384-4-55		
UNITS					
mm					

A
B
C
D
E
F