

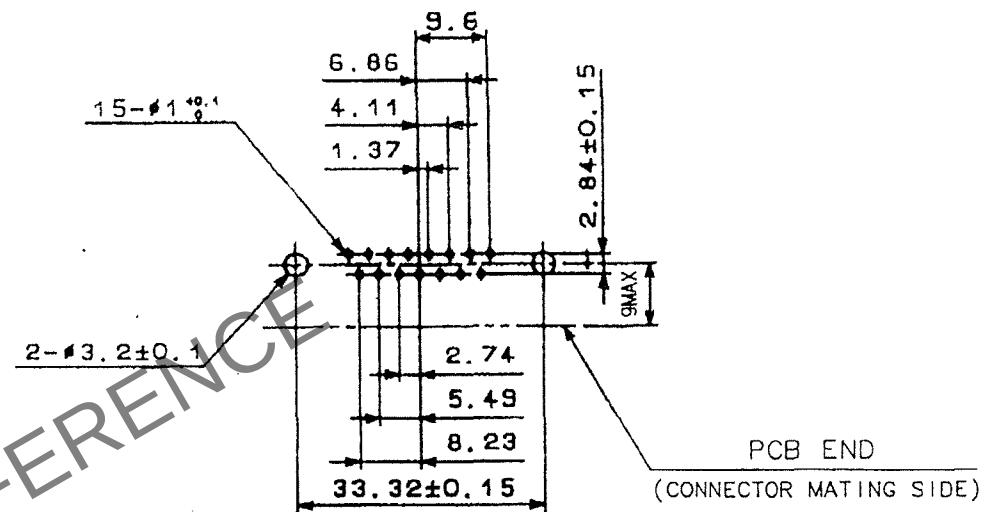
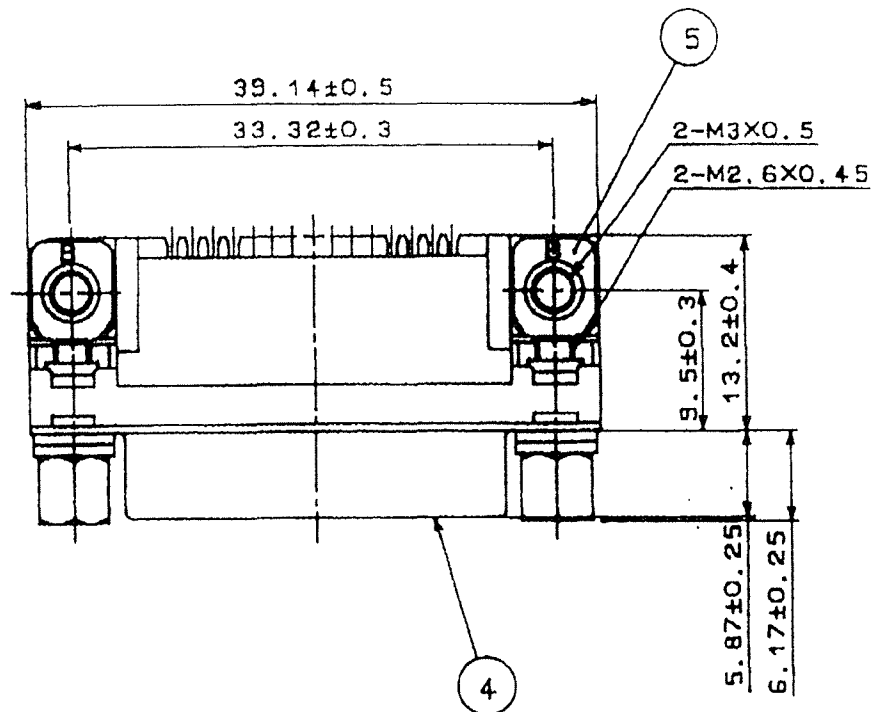


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	5	DIS-E-001215	Y.S	Y.E	07.02.22						. .
					. .						. .
					. .						. .

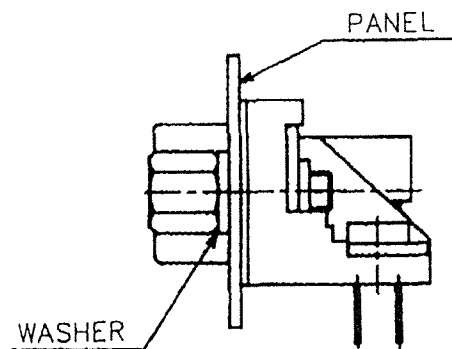

NOTE. PLEASE KEEP THE TOLERANCE TO LESS THAN ± 0.1
FOR THE DIMENSIONS WITHOUT TOLERANCE.

RECOMMENDED PC BOARD HOLE PATTERN
(SCALE 1:1)

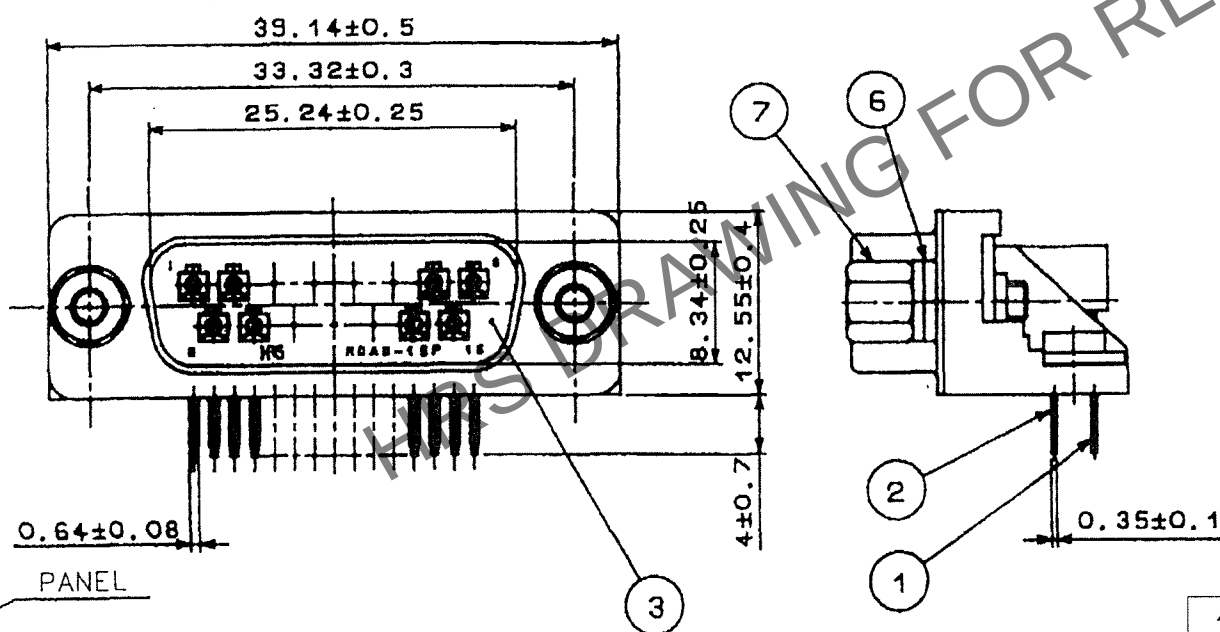

REMOVE ONE WASHER FOR 0.8-1.2 OF
PANEL THICKNESS. REMOVE TWO WASHERS
FOR 1.6 OF PANEL THICKNESS.

4	STEEL	 NICKEL PLATING 1μ m UNDER: COPPER PLATING 5μ m	7	STEEL	 NICKEL PLATING 2μ m UNDER: COPPER PLATING 1μ m
3	PBT	UL94V-0 (BLACK)	6	STEEL	 NICKEL PLATING 2μ m UNDER: COPPER PLATING 3μ m
1.2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 0.2μ m DIP: GOLD PLATING 0.03μ m  UNDER: NICKEL PLATING 2μ m	5	STEEL	 NICKEL PLATING 2μ m UNDER: COPPER PLATING 1μ m
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN T.KAMEYA 03.07.31	DESIGNED T.KAMEYA 03.07.31	CHECKED Y.ENAMI 03.08.04	APPROVED H.MIWA 03.08.05	RELEASED . .
----------------------	-------------------------------	----------------------------------	--------------------------------	--------------------------------	--------------------

	DRAWING NO.	PART NO.	1/1
	EDC3-021973-02  HIROSE ELECTRIC CO., LTD	RDAD-15P-LNA(55) CODE NO. CL211-0498-3-55	