


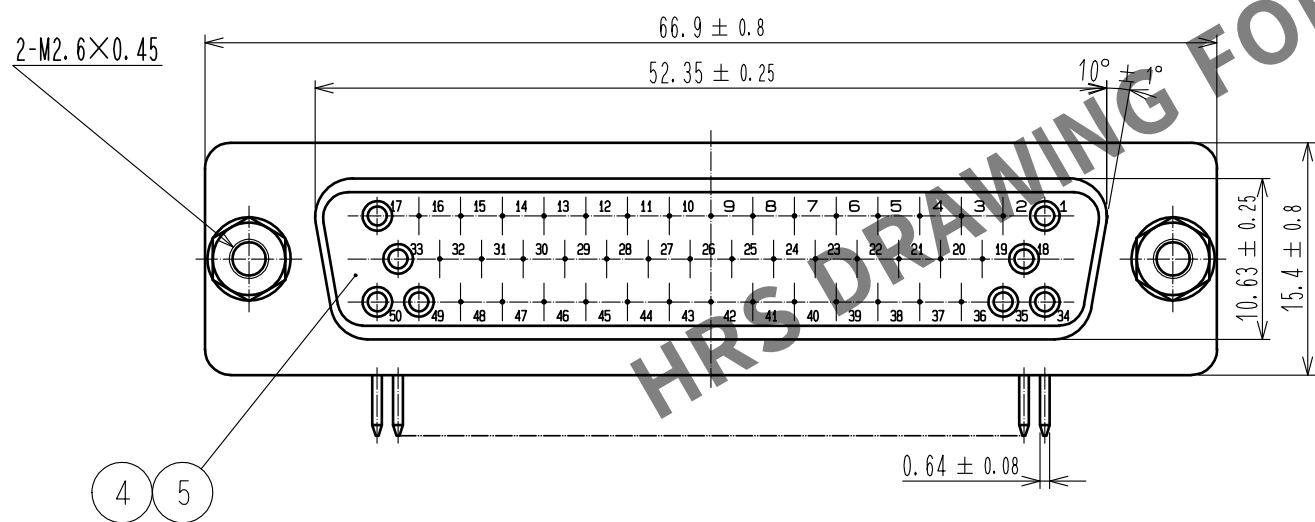


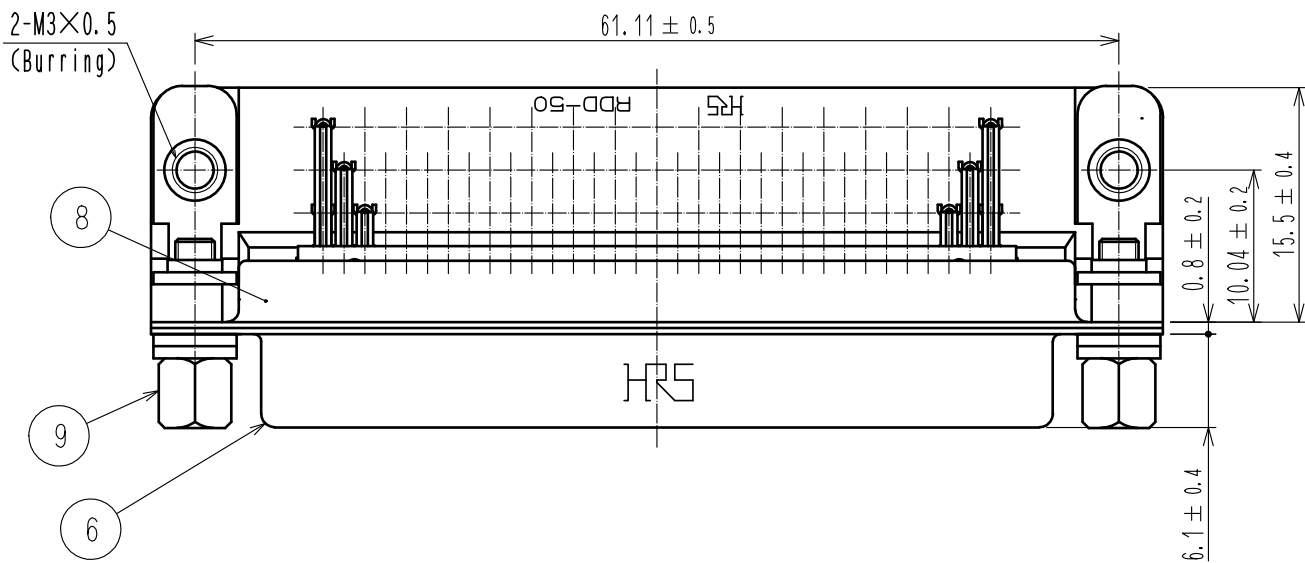


Installing connector on panel

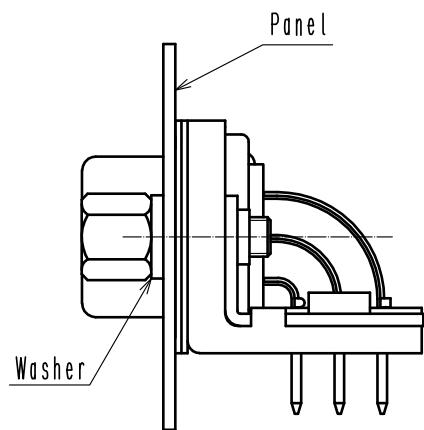


Remove one washer for 0.8 to 1.2 mm panel thickness.
Remove two washers for 1.6 mm panel thickness.

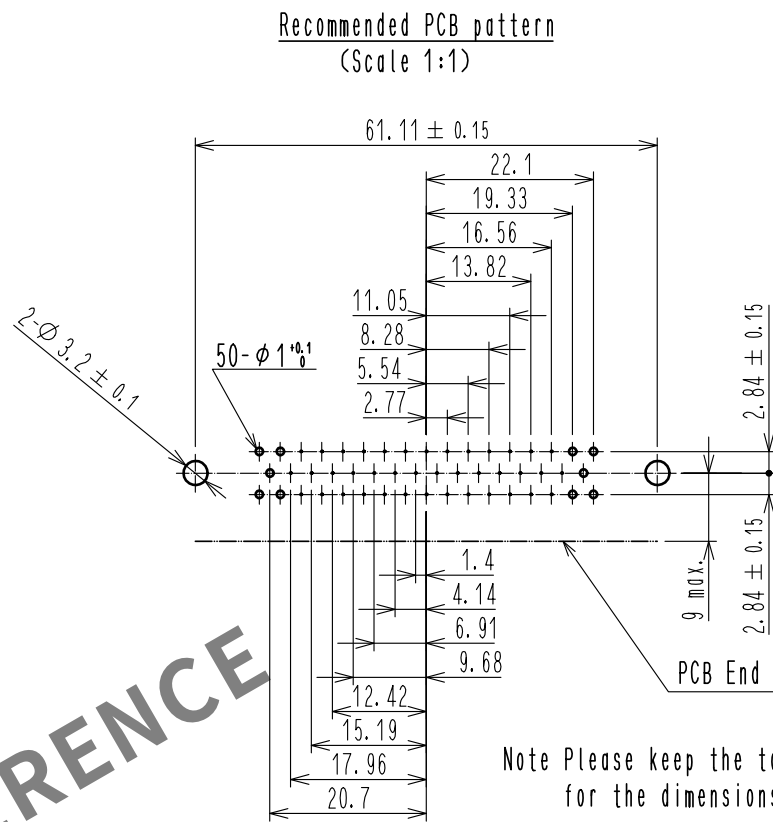

Note Please keep the tolerance to less than ± 0.1
for the dimensions without tolerance.

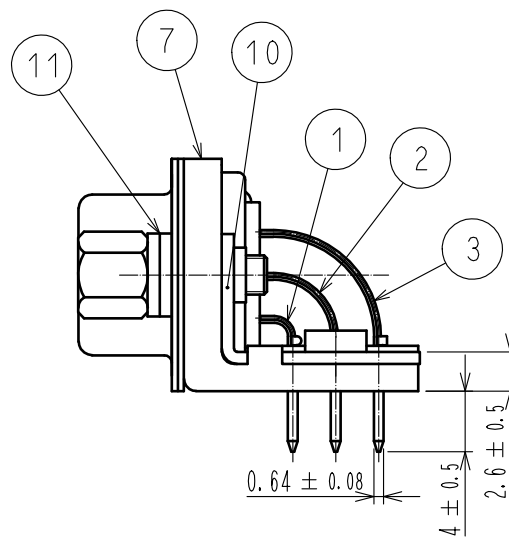

5	PBT	Black, UL94V-0	11	Steel	Nickel plating
4	PBT	Black, UL94V-0	10	Steel	Nickel plating
3	Phosphor bronze	Gold plating 0.2 μm min.	9	Steel	Nickel plating
2	Phosphor bronze	Gold plating 0.2 μm min.	8	Steel	Nickel plating
1	Phosphor bronze	Gold plating 0.2 μm min.	7	PBT	Black, UL94V-0
			6	Steel	Nickel plating
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	:RI. TAKAYASU	18. 06. 11	DRAWING NO.	EDC-023885-05-00		
		CHECKED	:AH. KODAMA	18. 06. 11	PART NO.	RDDDB-50S-LNA(C05)		
		DESIGNED	:P. EKSOURIYA	18. 06. 11	CODE NO.	CL211-0731-6-05		
		DRAWN	:P. EKSOURIYA	18. 06. 11	 			