


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

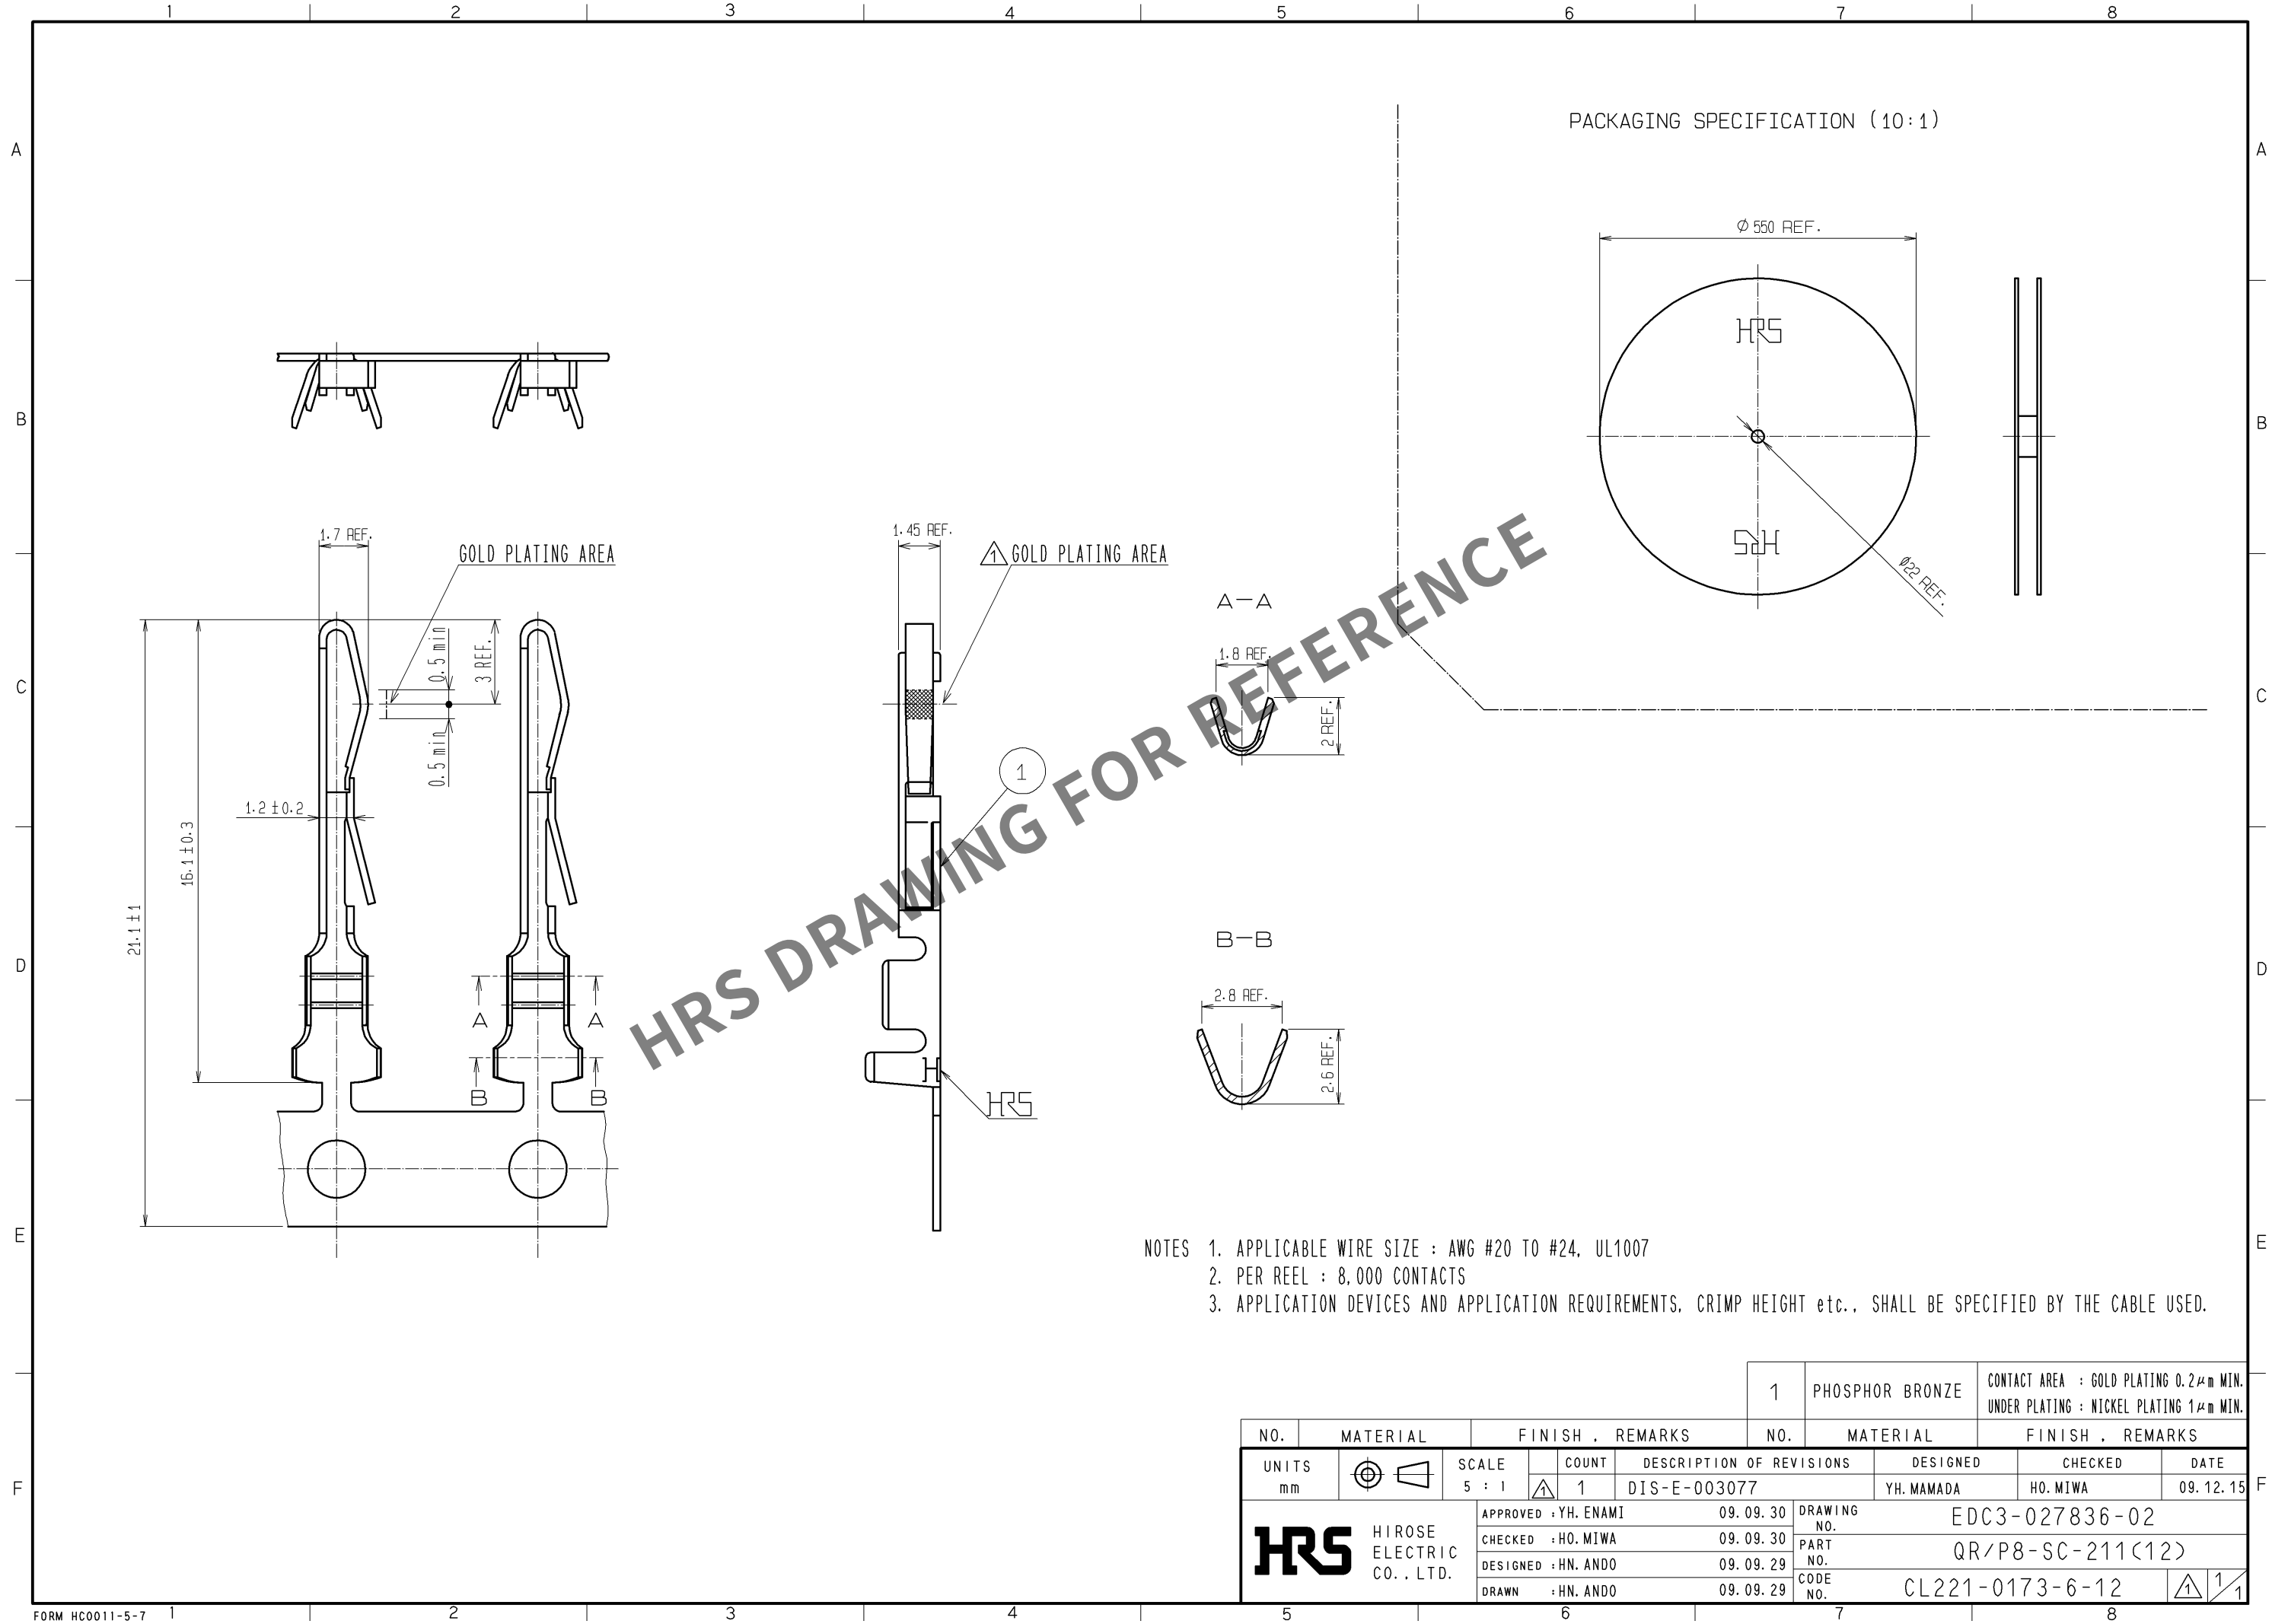

- NOTES 1. APPLICABLE WIRE SIZE : AWG #20 TO #24, UL1007
2. PER REEL : 8,000 CONTACTS
3. APPLICATION DEVICES AND APPLICATION REQUIREMENTS, CRIMP HEIGHT etc., SHALL BE SPECIFIED BY THE CABLE USED.

					1	PHOSPHOR BRONZE		CONTACT AREA : GOLD PLATING 0.2μm MIN. UNDER PLATING : NICKEL PLATING 1μm MIN.		
NO.	MATERIAL		FINISH , REMARKS			NO.	MATERIAL		FINISH , REMARKS	
UNITS mm			SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-E-003077		DESIGNED YH.MAMADA	CHECKED HO.MIWA	DATE 09.12.15
 HIROSE ELECTRIC CO., LTD.			APPROVED : YH. ENAMI			09.09.30	DRAWING NO. EDC3-027836-02			
			CHECKED : HO. MIWA			09.09.30	PART NO. QR/P8-SC-211(12)			
			DESIGNED : HN. ANDO			09.09.29	CODE NO. CL221-0173-6-12			
			DRAWN : HN. ANDO			09.09.29	 1 / 1			