


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

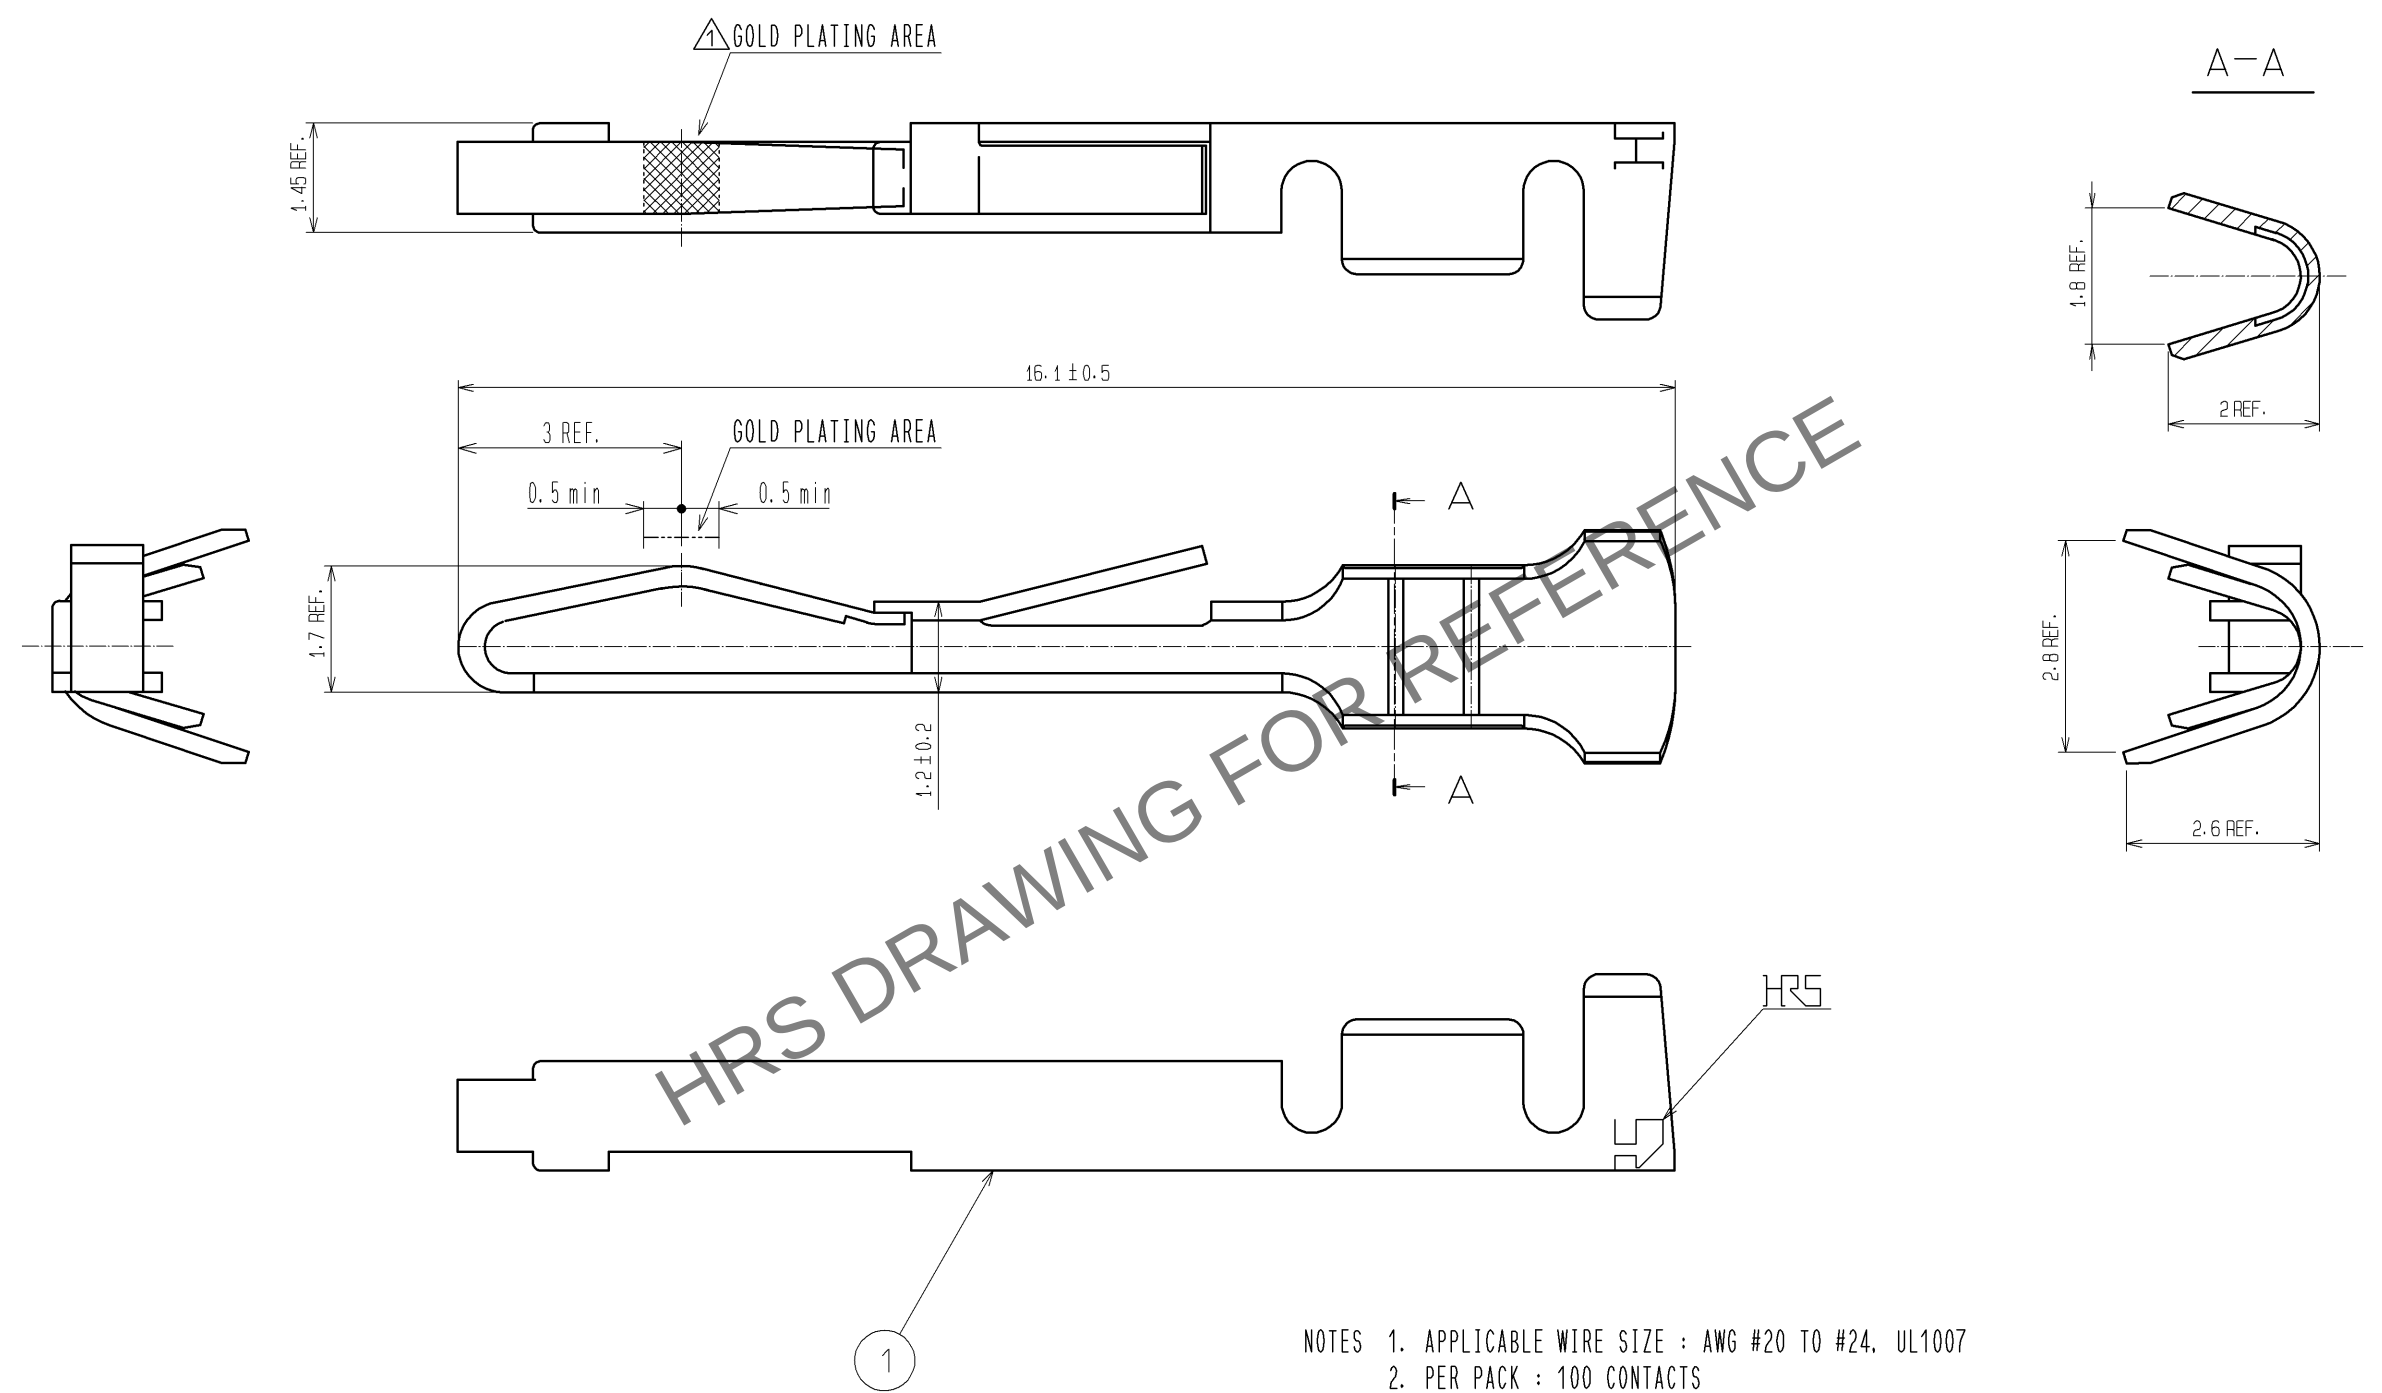

- NOTES 1. APPLICABLE WIRE SIZE : AWG #20 TO #24, UL1007
2. PER PACK : 100 CONTACTS
3. APPLICATION DEVICES AND APPLICATION REQUIREMENTS, CRIMP HEIGHT etc., SHALL BE SPECIFIED BY THE CABLE USED.

				1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2μm MIN. UNDER PLATING : NICKEL PLATING 1μm MIN.		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-003077		DESIGNED YH.MAMADA	CHECKED HO.MIWA	DATE 09.12.15
HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI	09.09.30	DRAWING NO.	EDC3-028367-01			
		CHECKED : HO. MIWA	09.09.30	PART NO.	QR/P8-SC-111(12)			
		DESIGNED : HN. ANDO	09.09.29	CODE NO.	CL221-0183-0-12			
		DRAWN : HN. ANDO	09.09.29					