

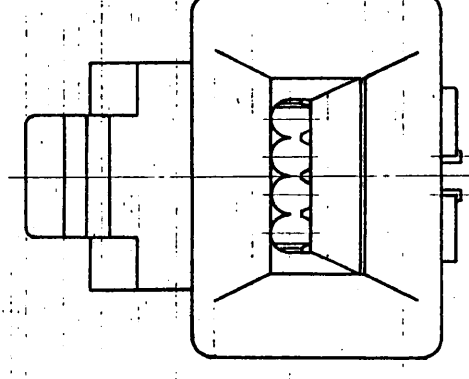
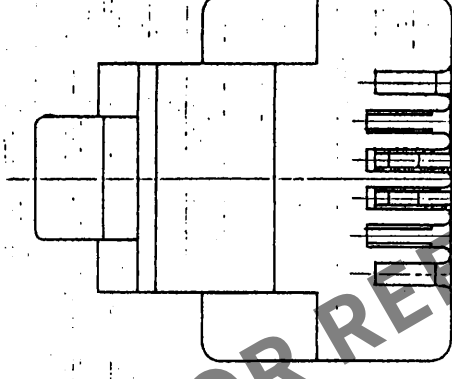


5		6		7		8	
△の注	訂正	記帳	担当	年月日	△の注	訂正	記帳
△					△		
△					△		
△					△		


注1. ()内は参考寸法を示す。

2. 本コネクタの適合ケージル寸法は下表による。

適合ケーブル寸法		0.90~1.00
	絶縁体 外径 (φmm)	—
	ビニル シース外径 A×B (mm)	4.8×2.6

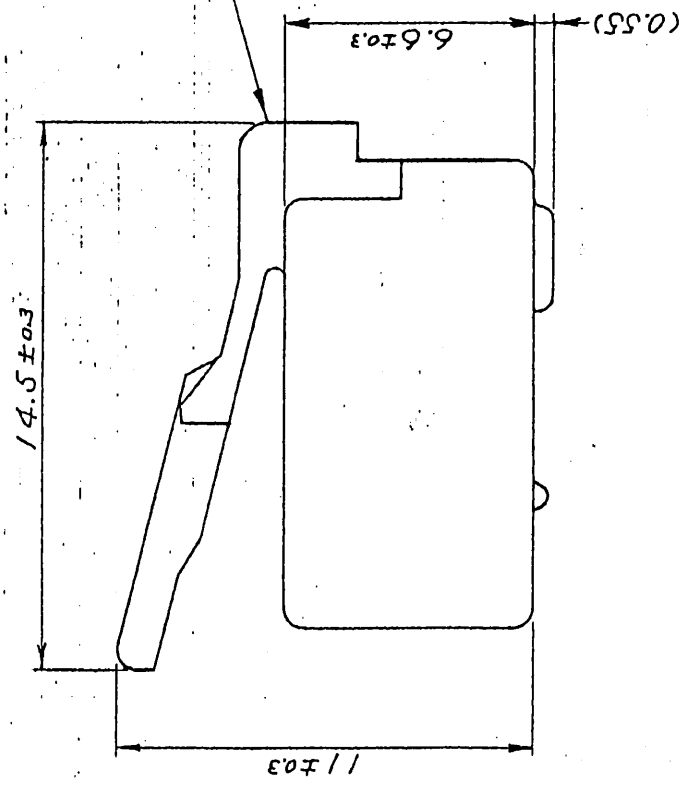

AA矢視圖

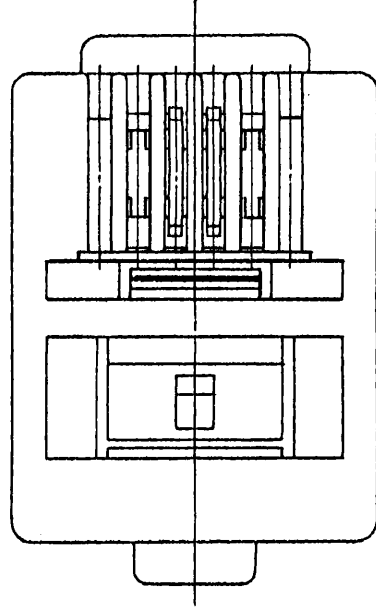

1	床加不仕込用	部量	材	質	処	理	備	考	色: トウメイ	部量	材	質	換	図	重	閲	理	備	考	金めっち	出	図
					寸法		区分	公差			製	図	担	当	換	図						
					角		度	±0.3			投	図	投	三輪	58.12.16	三輪	58.12.16	田坂				
					角		度	±0.5			6以下			6を二ス	18以下	58.12.16	58.12.16	58.12.16				
					角		度	±0.7			6を二ス	50以下			18を二ス	50以下	58.12.16	58.12.16				
					角		度	±1			50を二ス	125以下			50を二ス	125以下	58.12.16	58.12.16				
					角		度	±1.3			125を二ス	250以下			125を二ス	250以下	58.12.16	58.12.16				
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														
					角		度	±1														

形別	記有元	BTC			
----	-----	-----	--	--	--