

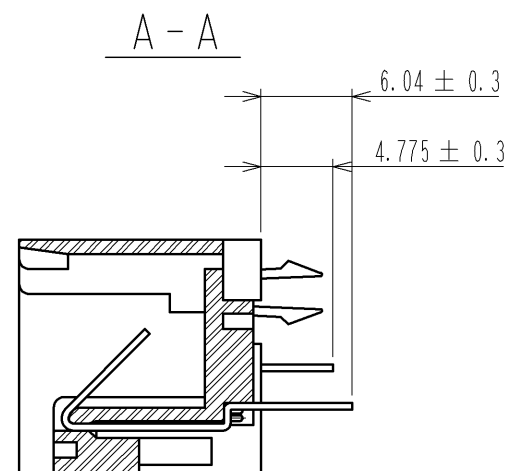
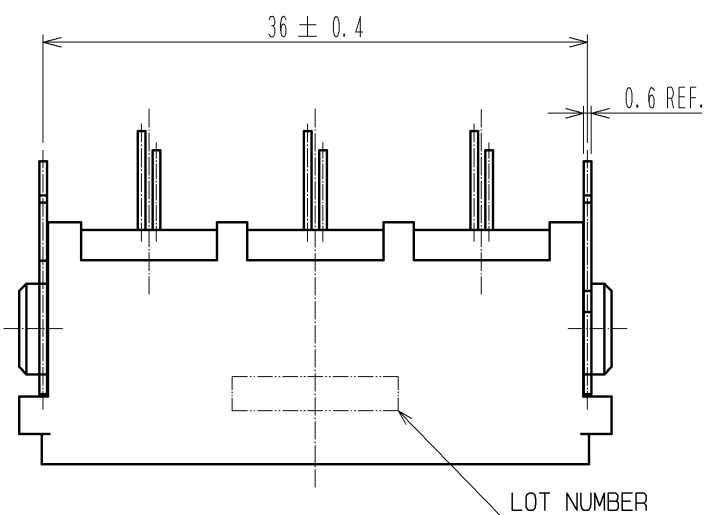
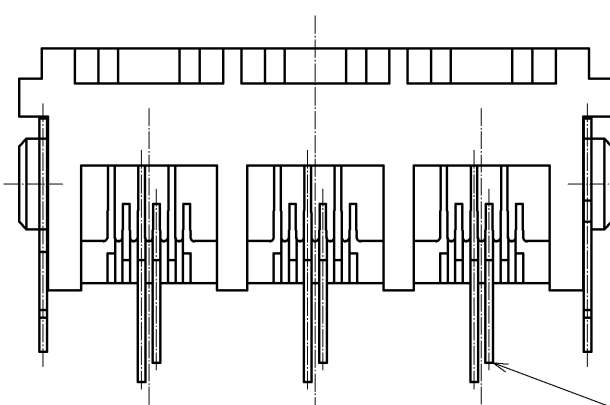
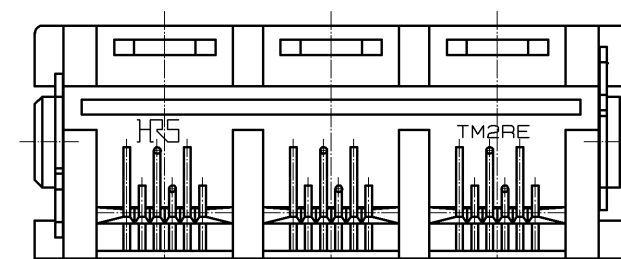
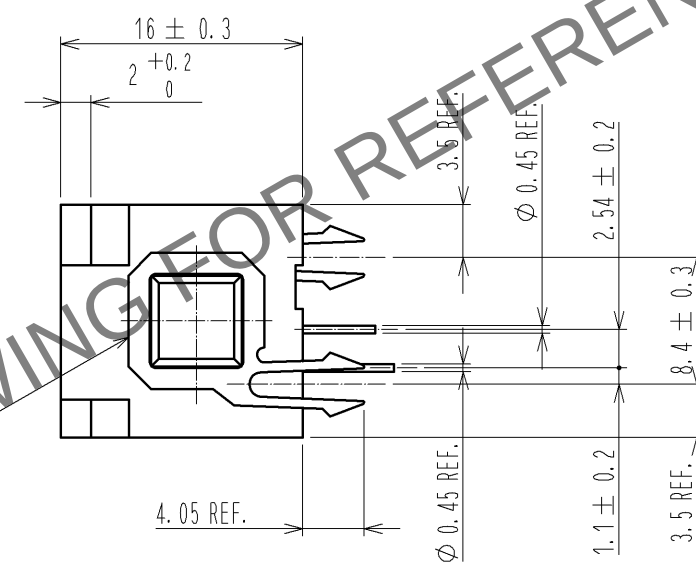


JUN.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
An Automotive equipment / device which demand high reliability, kindly contact our

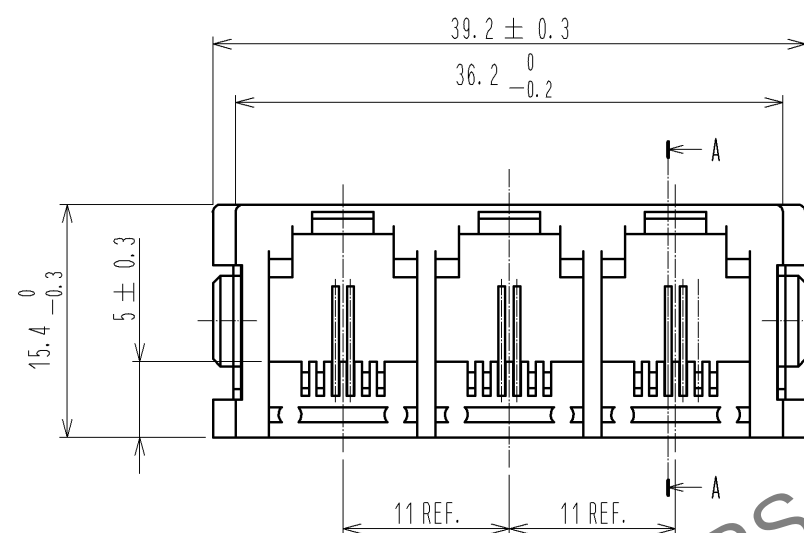

RECOMMENDED PC BOARD HOLE PATTERN
STRAIGHT TYPE, t1.6mm(MOUNTING SIDE)
TOLERANCE HAVE NOT BEEN DESCRIBED TO THE REFERENCE DIMENSION.

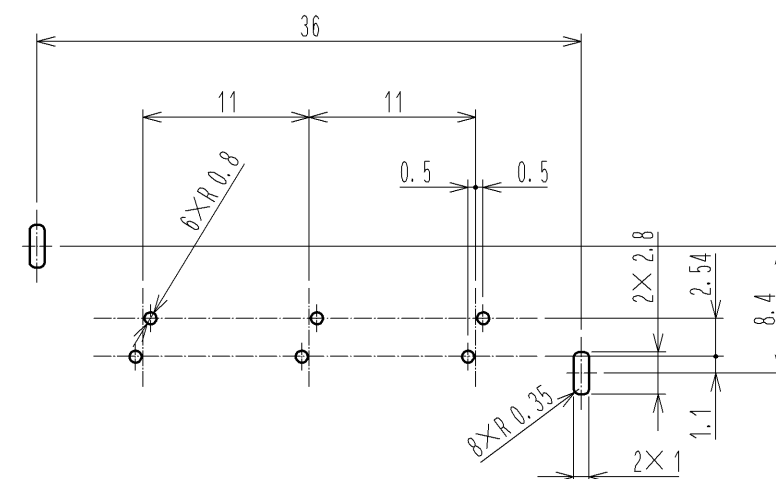

				3		PHOSPHOR BRONZE	SURFACE PLATING : TIN PLATING 3μm MIN UNDER PLATING : NICKEL PLATING 2μm MIN												
1	PBT	UL94V-0, (GRAY)				2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27μm MIN. LEAD AREA : GOLD PLATING 0.03μm MIN. UNDER PLATING : NICKEL PLATING 1.27μm MIN.											
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS									
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE			
 HIROSE ELECTRIC CO., LTD.				APPROVED : YH. ENAMI				10. 02. 24				DRAWING NO.				EDC3-021705-01			
				CHECKED : HO. MIWA				10. 02. 24				PART NO.				TM2RE-1806(50)			
				DESIGNED : HN. ANDO				10. 02. 23				CODE NO.				CL222-0591-2-50			
				DRAWN : HN. ANDO				10. 02. 23								 1/1			