
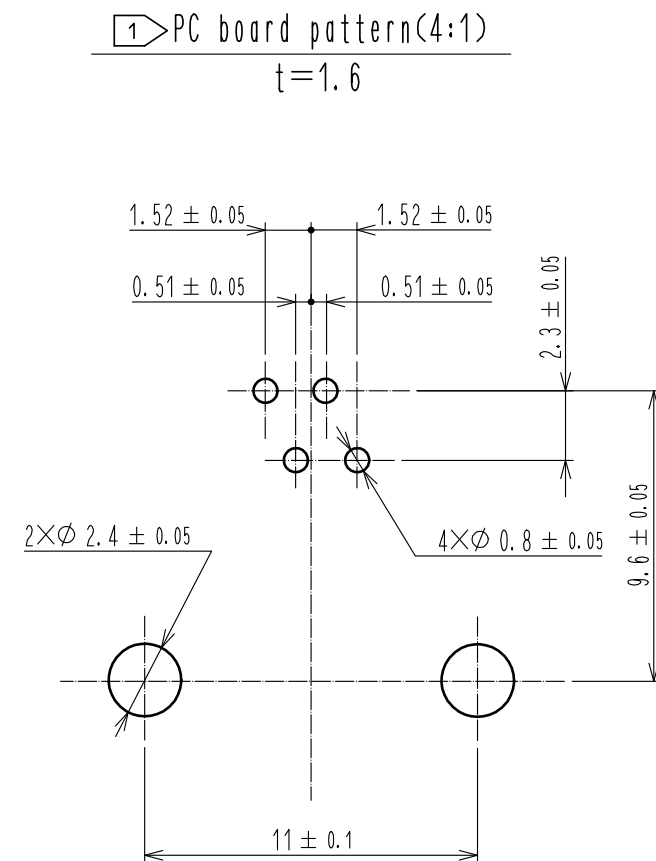
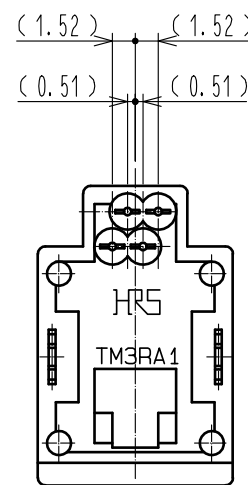
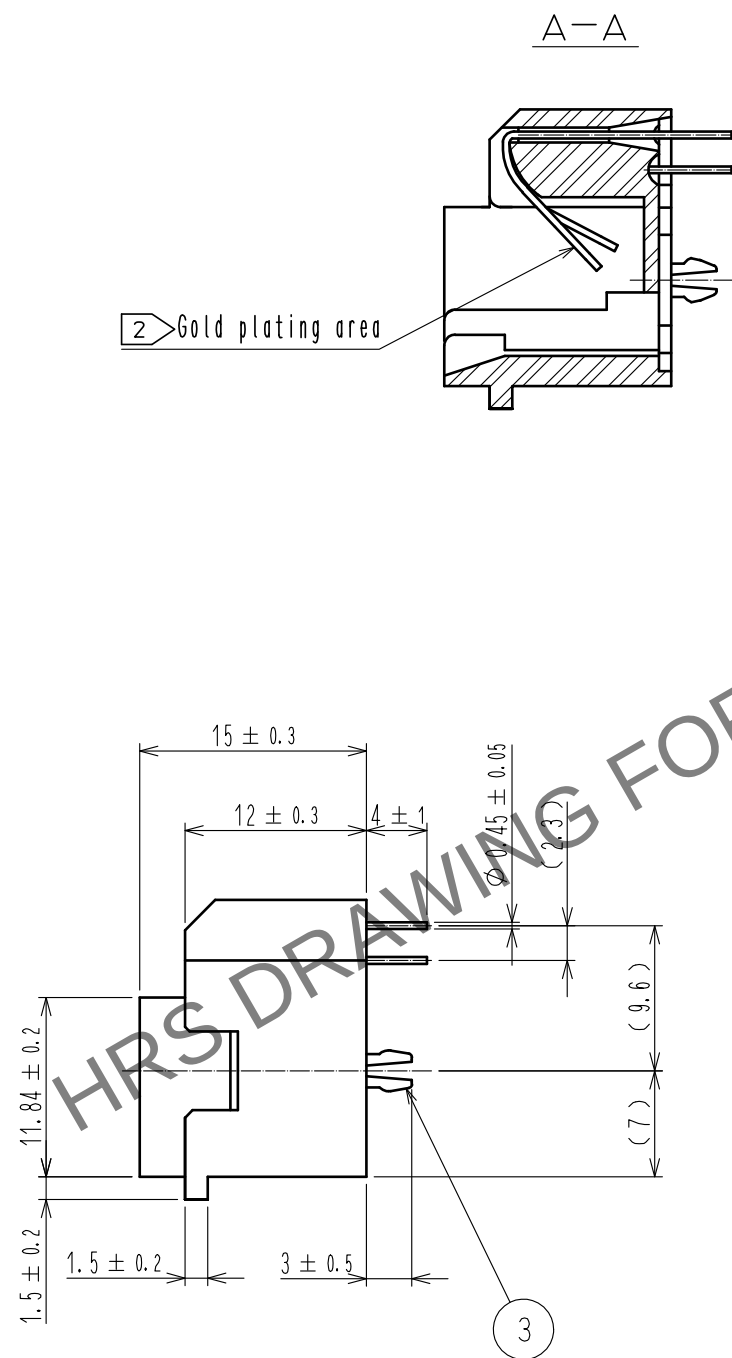


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

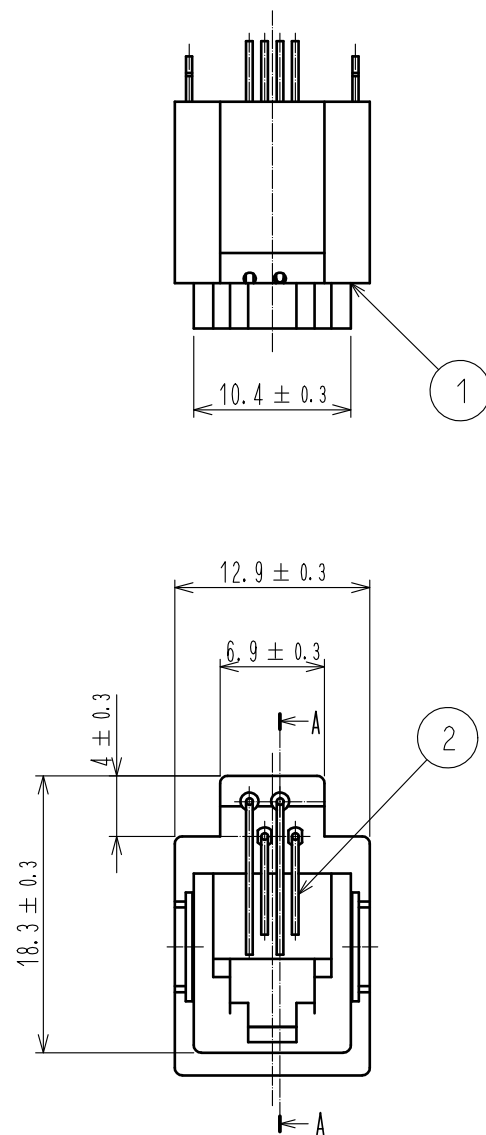


Notes 1 Dimensions are viewed from the connector mounting side on PCB.



2 It shall be plated with Nickel except for the gold plating area.
3. The dimensions in parentheses are for reference.

2	Phosphor bronze	Contact area : Gold plating 1.27 μ m min. Lead : Gold plating 0.03 μ m min. Under : Nickel plating 1.27 μ m min.	5	Styrene elastomer	blue
1	PBT	Black , UL94V-0	4	Rigid polyvinylchloride	Transparency
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-E-00015294	DESIGNED YK.MORIYAMA
HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	20180612	DRAWING NO.	EDC-025815-67-12
		CHECKED : RI. TAKAYASU	20180612	PART NO.	TM3RA1-44(67)
		DESIGNED : MO. SHIMOYAMA	20180612	CODE NO.	CL0222-1374-0-67
		DRAWN : SJ. SATO	20180612		

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

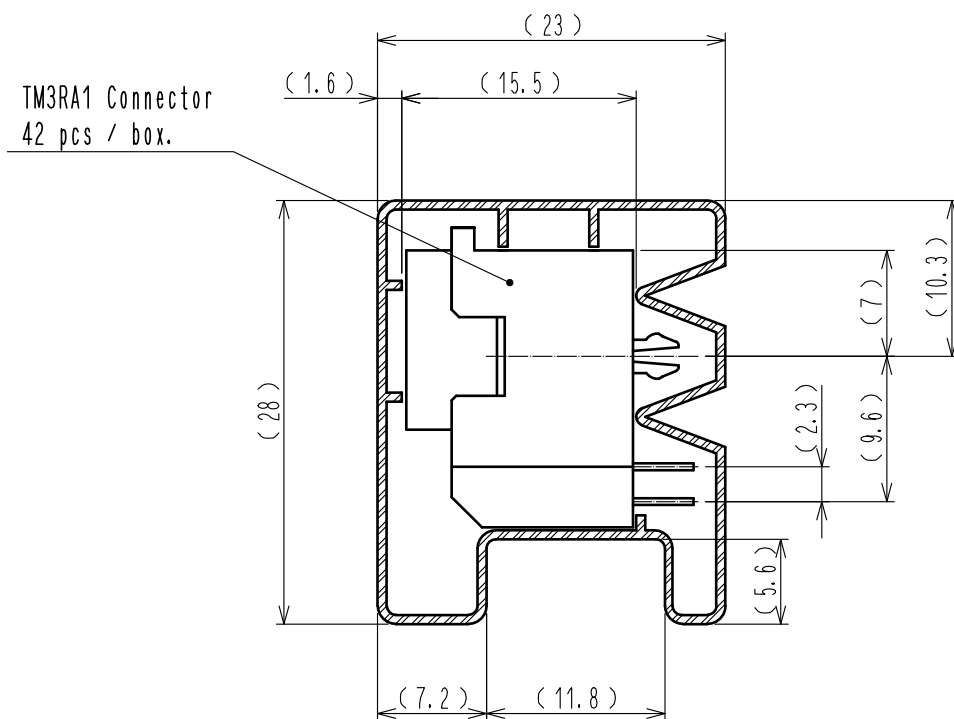

△ Outline of packaging specifications (1:1)

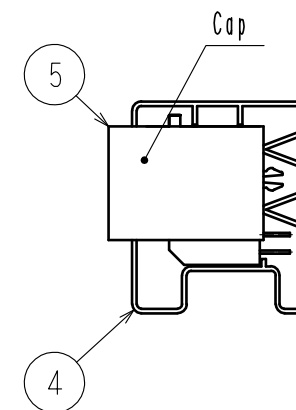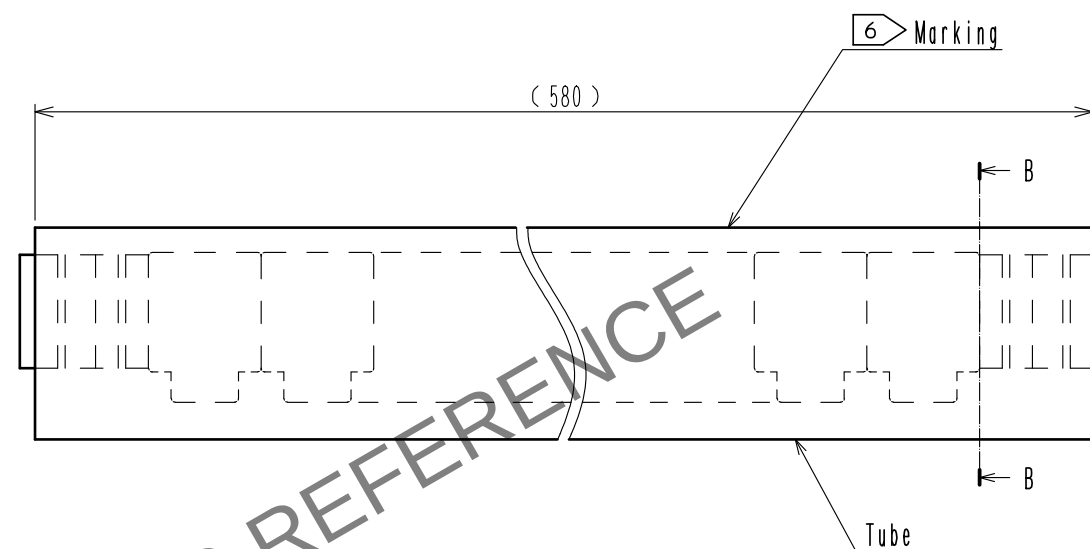

- Notes
4. Tube thickness = 0.6mm
 5. The dimensions in parentheses are for reference.
 - 6 The following marking are printed on the top of the tube.
TM3RA1シリーズ ヒロセ電機株式会社 空チューブの回収に御協力下さい。
TM3RA1 Series HIROSE ELECTRIC CO.,LTD. Please cooperate with us collect empty the tubes.
 - △ 7. After packing connectors, fix both ends of the tube using the cap.

△ Deletion of a drawing in Note 7.

HRS

DRAWING NO.	EDC-025815-67-12
PART NO.	TM3RA1-44(67)
CODE NO.	CL0222-1374-0-67

△ 2/2