

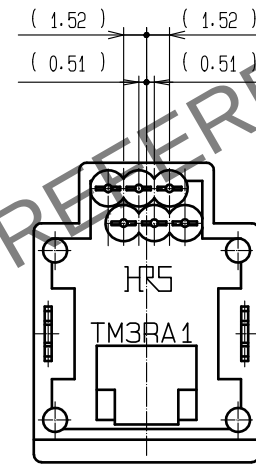
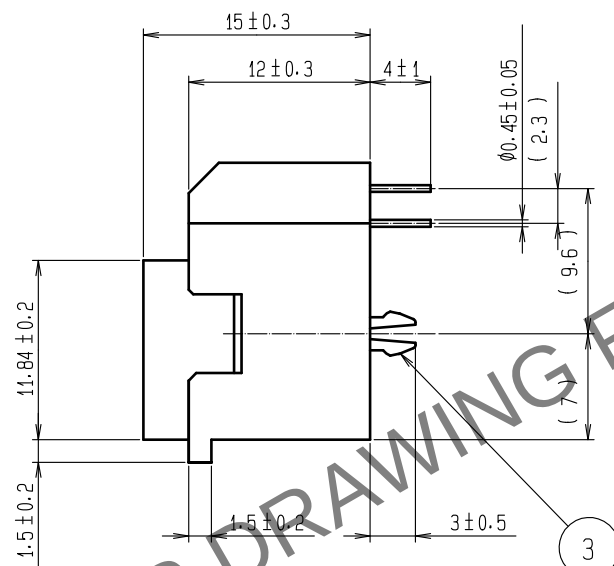
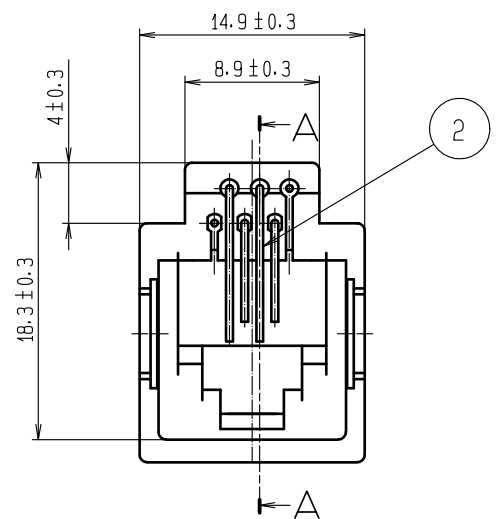


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

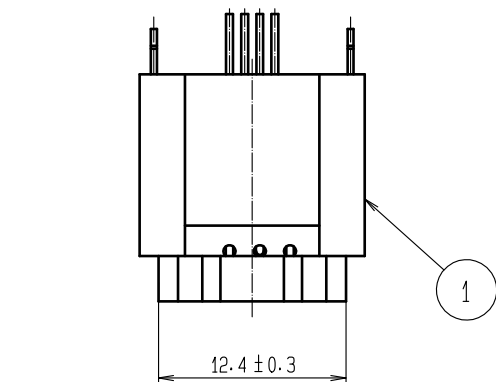


1 RECOMMENDED PC BOARD PATTERN (4 : 1)

t = 1.6

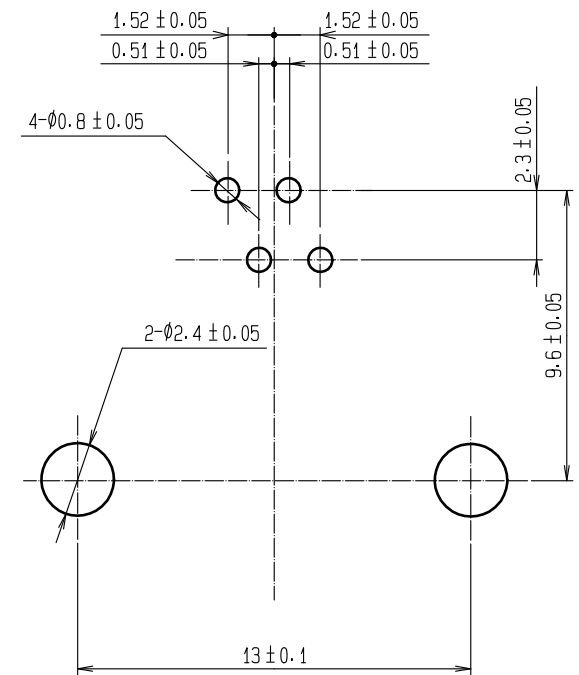

A-A



- NOTE 1 BACK BOARD DIMENSIONS ARE VIEWED FROM THE CONNECTOR MOUNTING SURFACE ON PCB.
2. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 1.27µm min LEAR: GOLD PLATING 0.03µm min UNDER: NICKEL PLATING 1.27µm min	5	STYRENIC-BASED ELASTOMERS	(BLUE)
			4	RIGID POLYVINYLCHLORIDE	(CLEAR)
1	PBT	(BLACK)UL94V-0	3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1µm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 7	DESCRIPTION OF REVISIONS DIS-E-00015294	
HIROSE ELECTRIC CO., LTD.		APPROVED : H0. MIWA	20070223	DRAWING NO.	EDC3-025817-02
		CHECKED : YH. ENAMI	20070223	PART NO.	TM3RA1-64 (67)
		DESIGNED : MT. ITANO	20070222	CODE NO.	CL0222-1376-5-67
		DRAWN : MT. ITANO	20070222		
		DESIGNED : H0. MIWA	20070223	DATE	20231221

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO.,LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

