

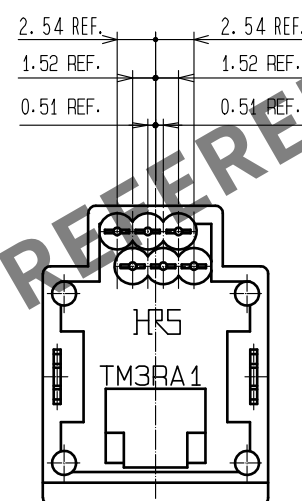
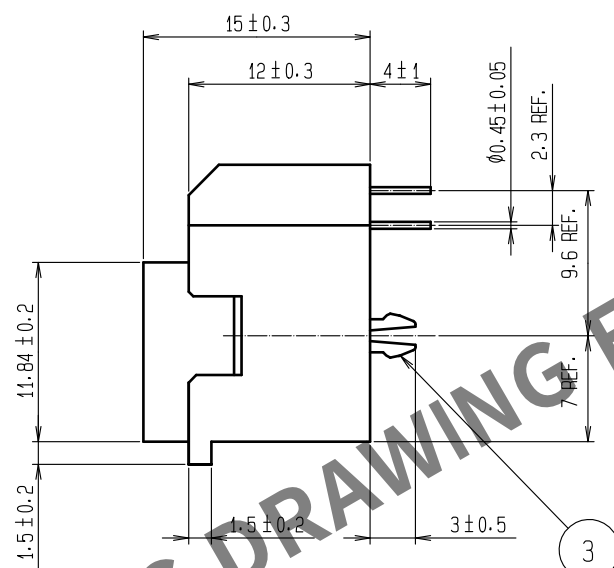
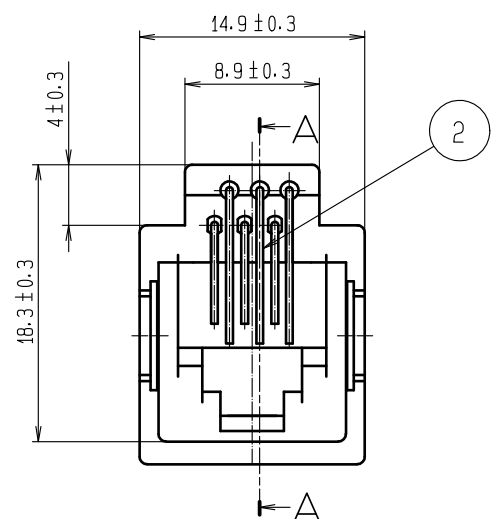



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

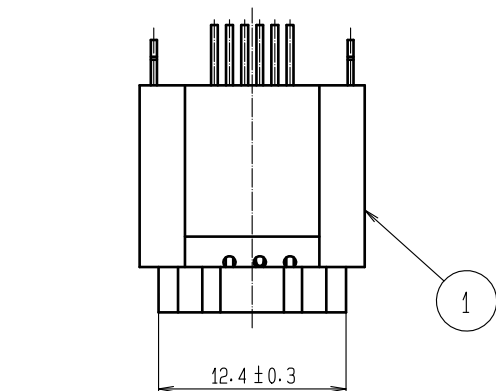

1 RECOMMENDED PC BOARD
PATTERN (4:1)
t=1.6

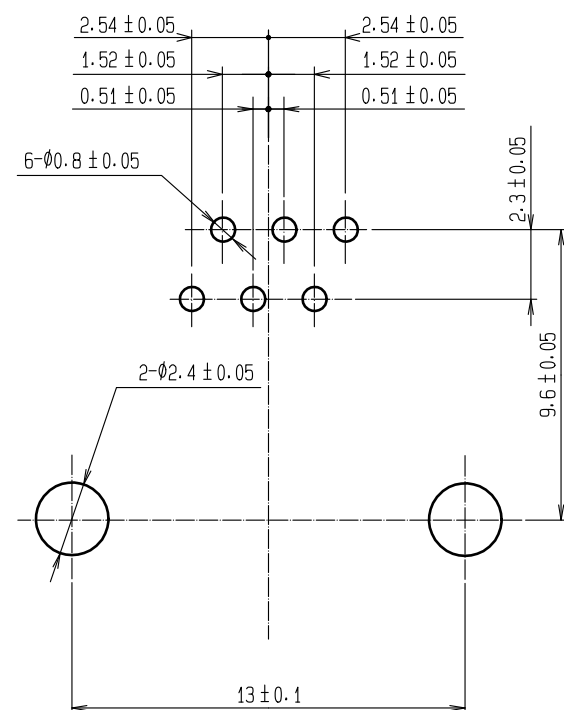

A-A



NOTE 1 PC BOARD DIMENSIONS ARE VIEWED FROM
THE CONNECTOR MOUNTING SURFACE ON PCB.

2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 1.27µm min LEAR: GOLD PLATING 0.03µm min UNDER: NICKEL PLATING 1.27µm min	5	STYRENIC-BASED ELASTOMERS	BLUE
			4	RIGID POLYVINYLCHLORIDE	CLEAR
			3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1µm min
1	PBT	BLACK, UL94V-0	NO.	MATERIAL	FINISH, REMARKS
NO. MATERIAL FINISH, REMARKS NO. MATERIAL FINISH, REMARKS					
UNITS mm		SCALE 2:1	COUNT 4	DESCRIPTION OF REVISIONS DIS-E-00015294	
 HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU 20160331		DRAWING NO. EDC-025818-67-00	
		CHECKED : NM. NISHIMATSU 20160331		PART NO. TM3RA1-66 (67)	
		DESIGNED : TS. ITO 20160331		CODE NO. CL0222-1377-8-67	
		DRAWN : TS. ITO 20160331		1/2	
DESIGNED		YK. MORIYAMA		CHECKED	
DATE		20231221		DATE	

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

