
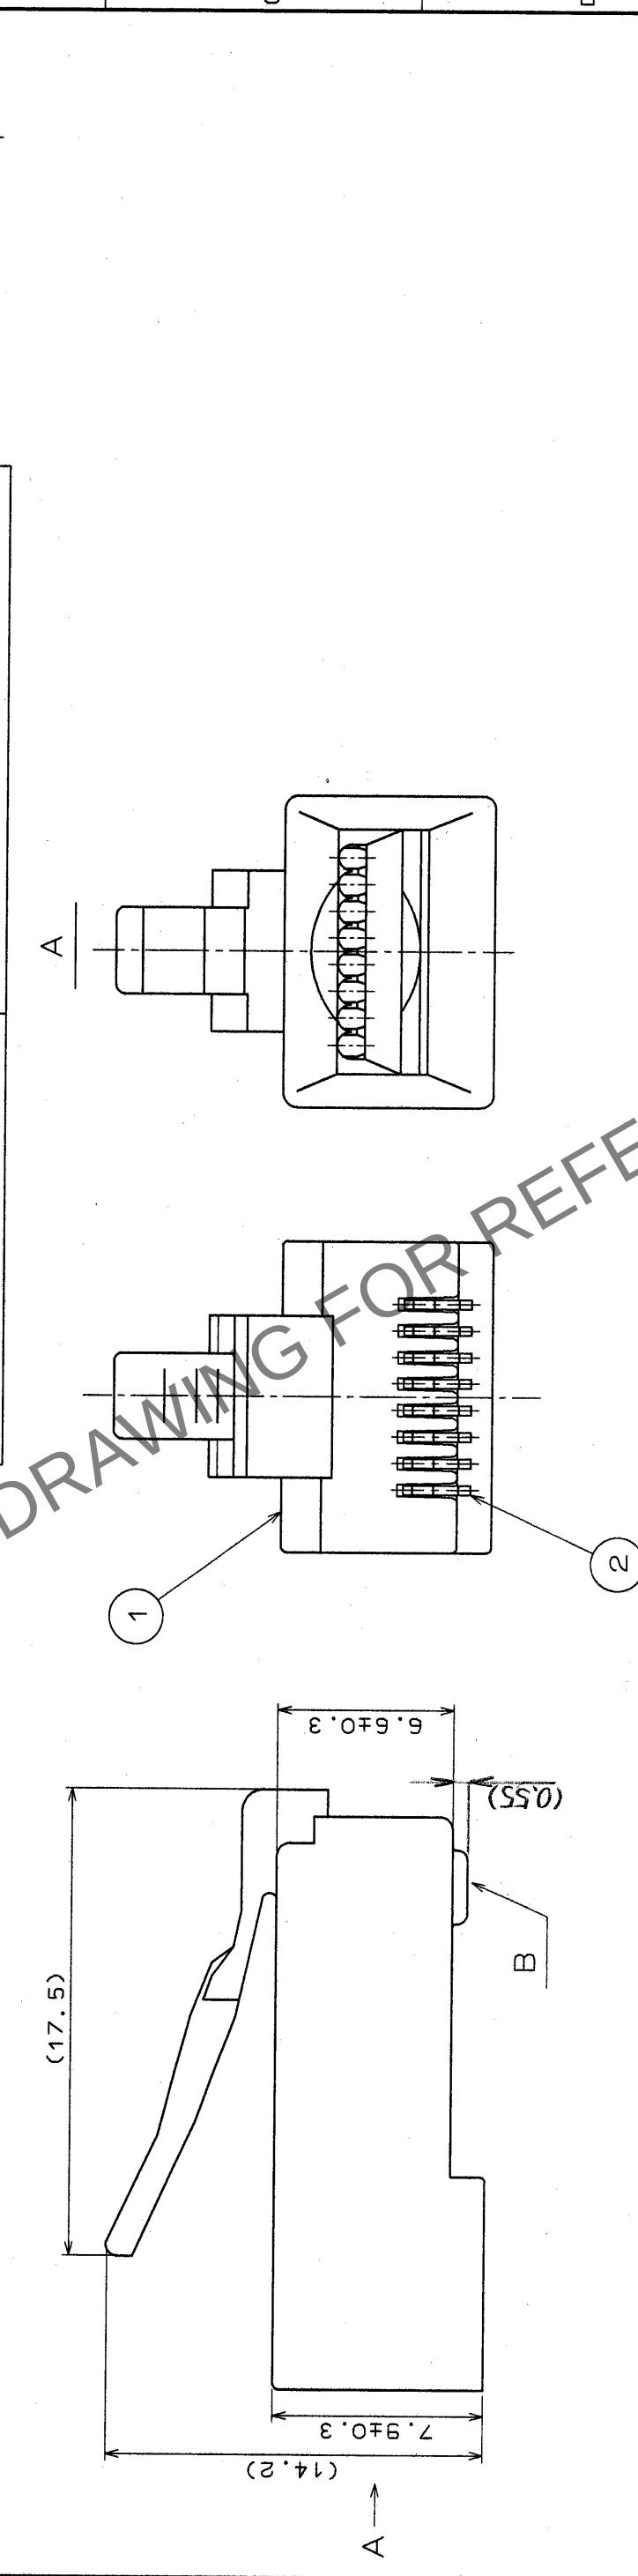


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				• •	△				• •
△				• •	△				• •
△				• •	△				• •

2	TABLE - 1	
	APPLICABLE CABLE	3 ATTACHED

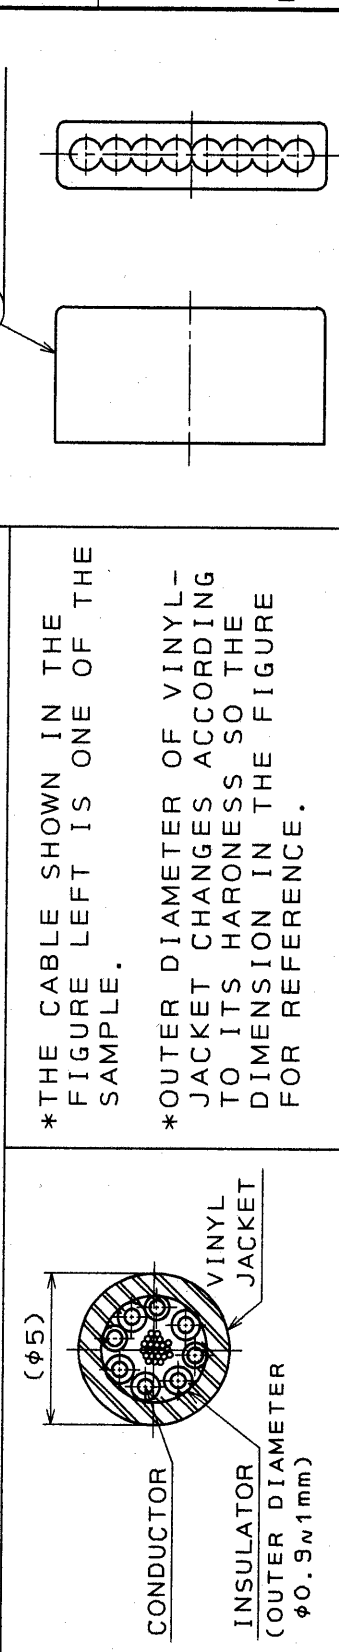

NOTES

- 1 THE DIMENSION IN PARENTHESIS ARE FOR REFERENCE.
- 2 APPLICABLE CABLE OF THIS CONNECTOR IS SHOWN IN TABLE-1.
- 3 THE ATTACHED SHALL BE USED TO ALIGN WIRES.
- 4 (CABLE SHALL BE ASSEMBLED WITH ADAPTOR INSERTED) USE THE JIGS SHOWN IN TABLE-2 FOR WIRING THIS CONNECTOR.

2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 1.27μm(B AREA)							
1	POLYCARBONATE	CLEAR	3	POLYCARBONATE	CLEAR				
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS				
CODE NO. (OLD)			DRAWN			DESIGNED			RELEASED
			T. Watanabe			H. Minato			S. Sato
			'95. 7. 10			95. 7. 10			95. 7. 10
DRAWING NO.			PART NO.			TM10P-88P			
EDC3-028188									
SCALE			CODE NO.			CL222-1818-1			1/1
4 : 1			HIROSE ELECTRIC CO., LTD.						
UNITS			HRS						
mm									

4 TABLE-2	
EQUIPMENT	PART NO.
SEMI-AUTO ASSEMBLY MACHINE	APPLICATOR 105 TM8/10P88
HAND TOOL	TC-2220-8/10P-88