


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

TO

Q2

USA

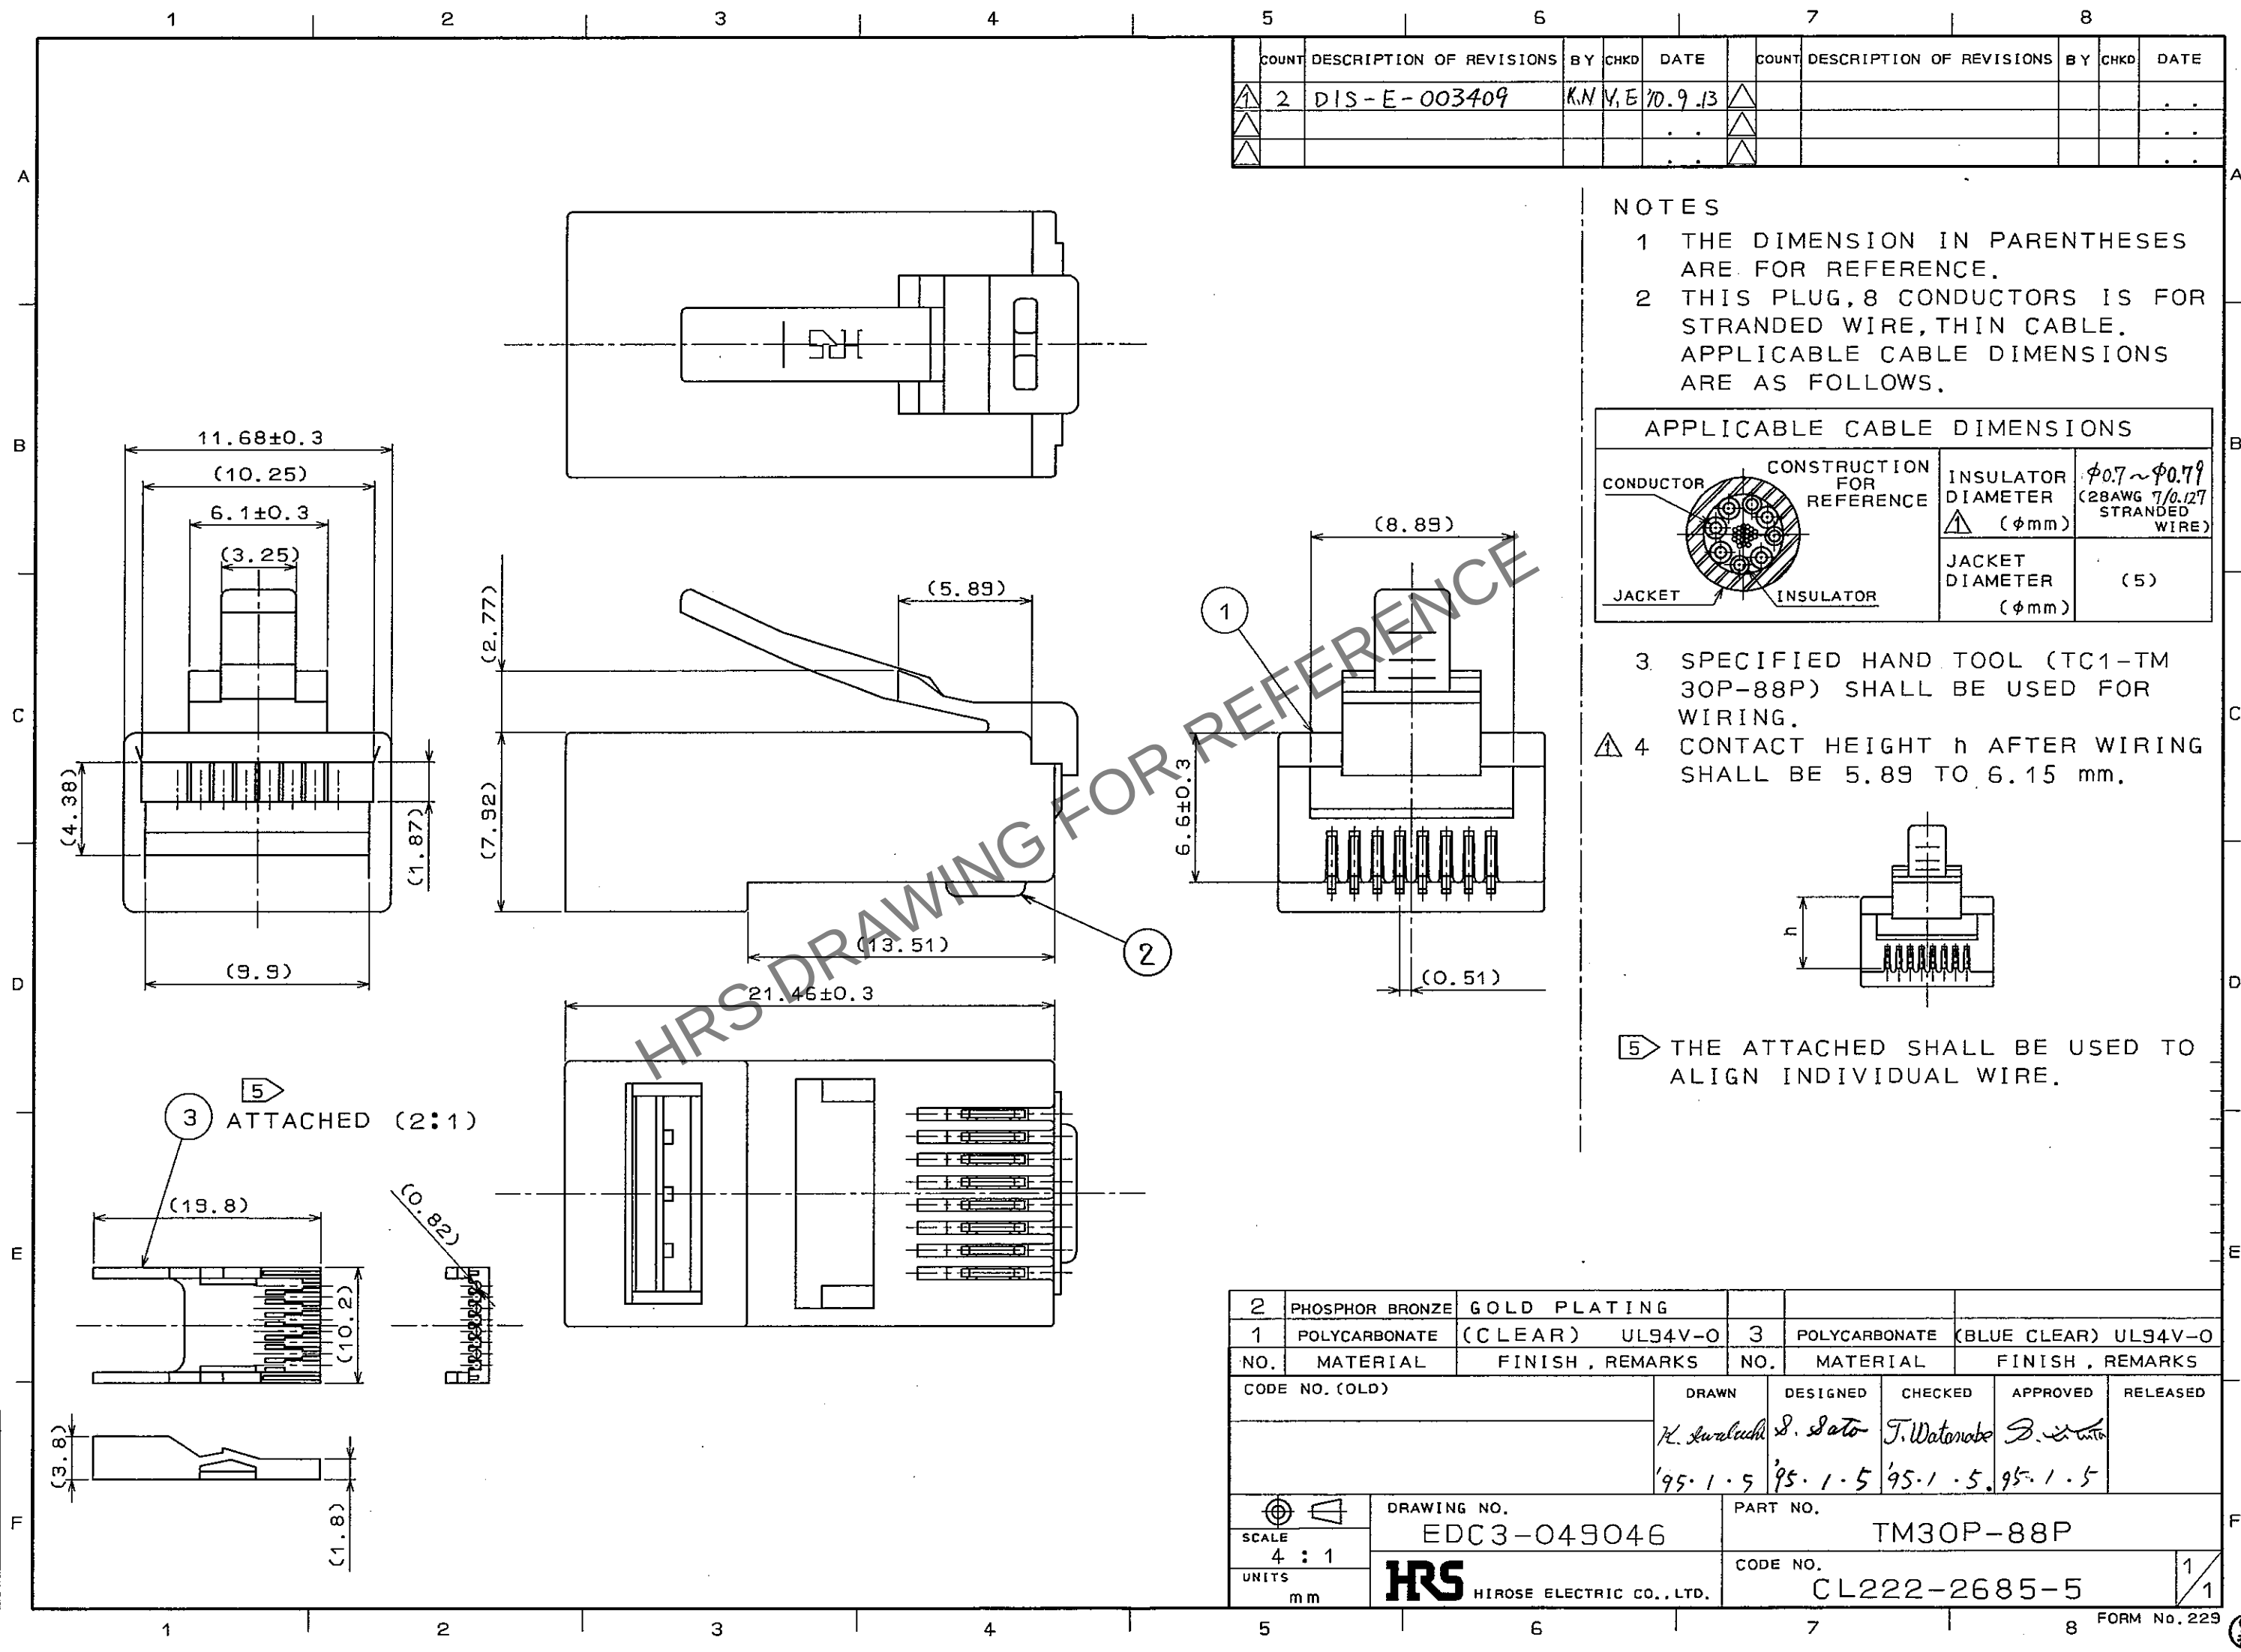


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-E-003409	KN	V,E	10.9.13					

- NOTES
- 1 THE DIMENSION IN PARENTHESES ARE FOR REFERENCE.
 - 2 THIS PLUG,8 CONDUCTORS IS FOR STRANDED WIRE,THIN CABLE. APPLICABLE CABLE DIMENSIONS ARE AS FOLLOWS.

APPLICABLE CABLE DIMENSIONS			
	CONSTRUCTION FOR REFERENCE	INSULATOR DIAMETER	$\phi 0.7 \sim \phi 0.79$ (28AWG 7/0.127 STRANDED WIRE)
		JACKET DIAMETER	(5)

- 3 SPECIFIED HAND TOOL (TC1-TM 30P-88P) SHALL BE USED FOR WIRING.
- 4 CONTACT HEIGHT h AFTER WIRING SHALL BE 5.89 TO 6.15 mm.



- 5 THE ATTACHED SHALL BE USED TO ALIGN INDIVIDUAL WIRE.

2	PHOSPHOR BRONZE	GOLD PLATING			
1	POLYCARBONATE	(CLEAR) UL94V-O	3	POLYCARBONATE	(BLUE CLEAR) UL94V-O
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			K. Iwatake	S. Sato	T. Watanabe
			'95.1.5	'95.1.5	'95.1.5
DRAWING NO.			PART NO.		
EDC3-049046			TM30P-88P		
SCALE			CODE NO.		
4 : 1			CL222-2685-5		
UNITS					
mm					

HRS HIROSE ELECTRIC CO., LTD.