
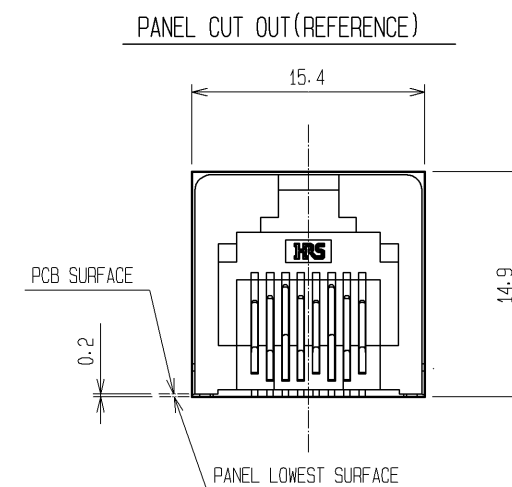

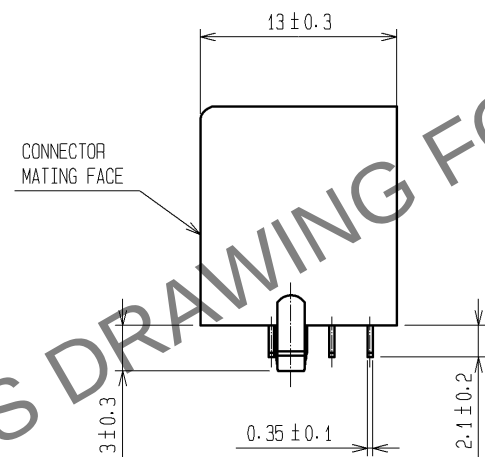
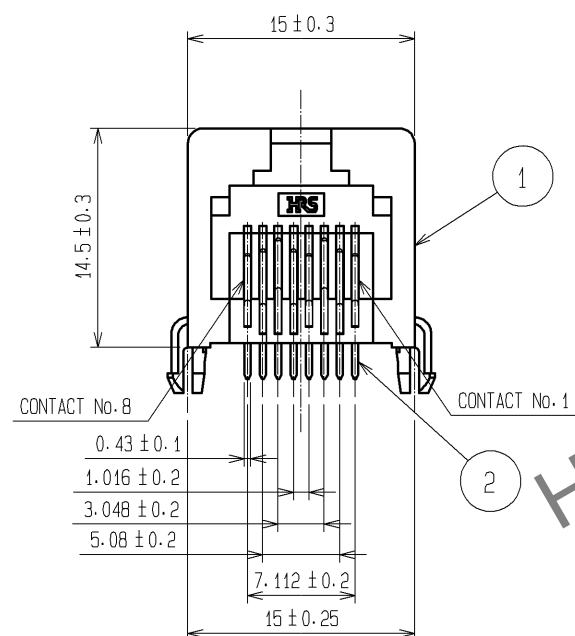
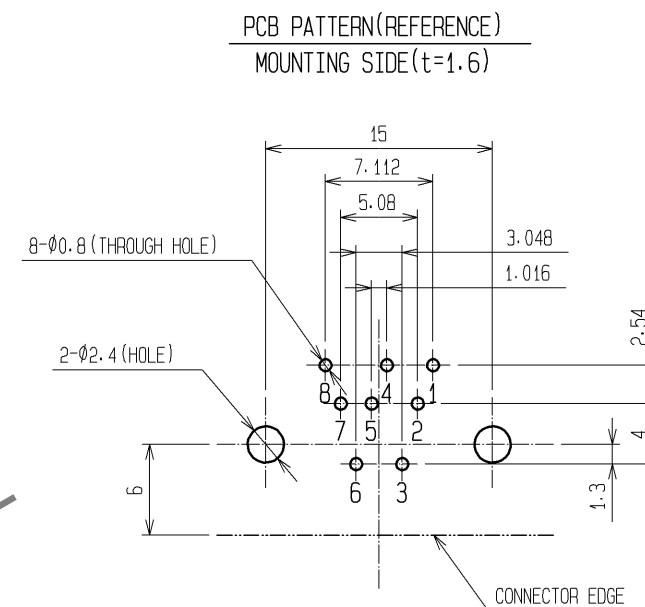
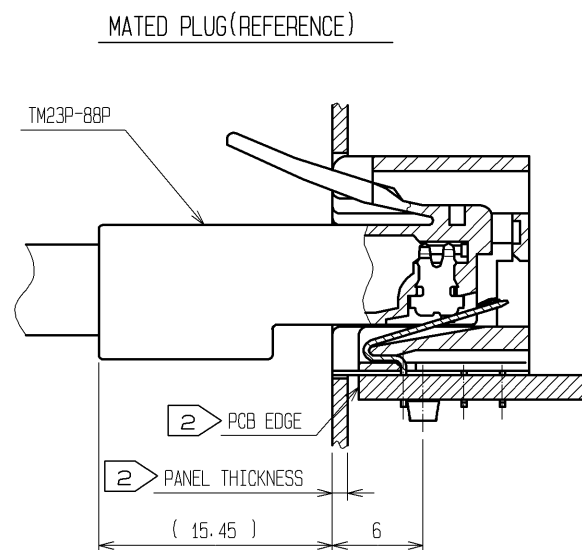





- NOTES 1 APPLICABLE PLUG CONNECTOR:TM23P-88P(CL222-2916-6).
- 2 PANEL THICKNESS SHALL BE CONSIDERED NOT THE PANEL AND THE PCB EDGE TO INTERFERE EACH OTHER.
- 3 THIS PRODUCT DOES NOT HAVE CAT6 PERFORMANCE.COMPENSATION ON THE BOARD IS REQUIRED TO SECURE CAT6 PERFORMANCE

1	PBT	BLACK, UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA :GOLD PLATING 1.27μm min LEAD AREA :GOLD PLATING 0.03μm min UNDER :NICKEL PLATING 1.27μm min	①
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	 COUNT 2	DESCRIPTION OF REVISIONS DIS-E-003470		DATE 10. 10. 15
 HIROSE ELECTRIC CO., LTD.		APPROVED :H.O. MIWA		05. 01. 05	DRAWING NO. EDC3-124001-02	
		CHECKED :TH. KAMEYA		05. 01. 05	PART NO. TM23R-5A-88(50)	
		DESIGNED :SS. SATOH		05. 01. 05	CODE NO. CL222-2918-1-50	
		DRAWN :SS. SATOH		05. 01. 05	① 1/1	