

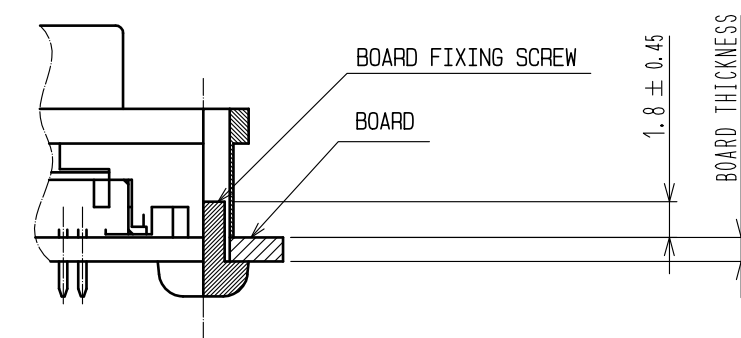
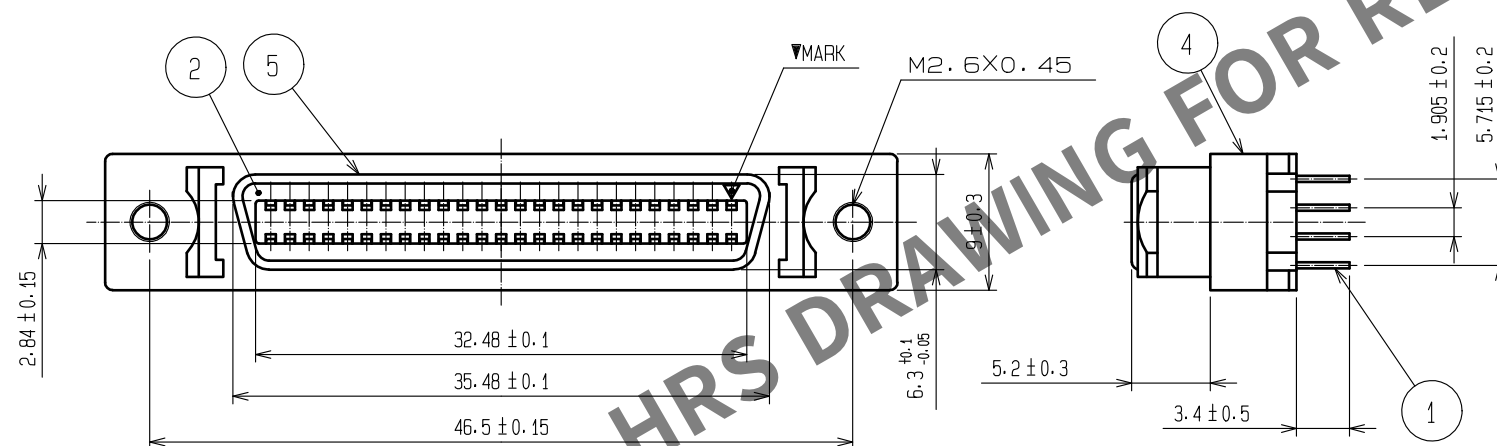
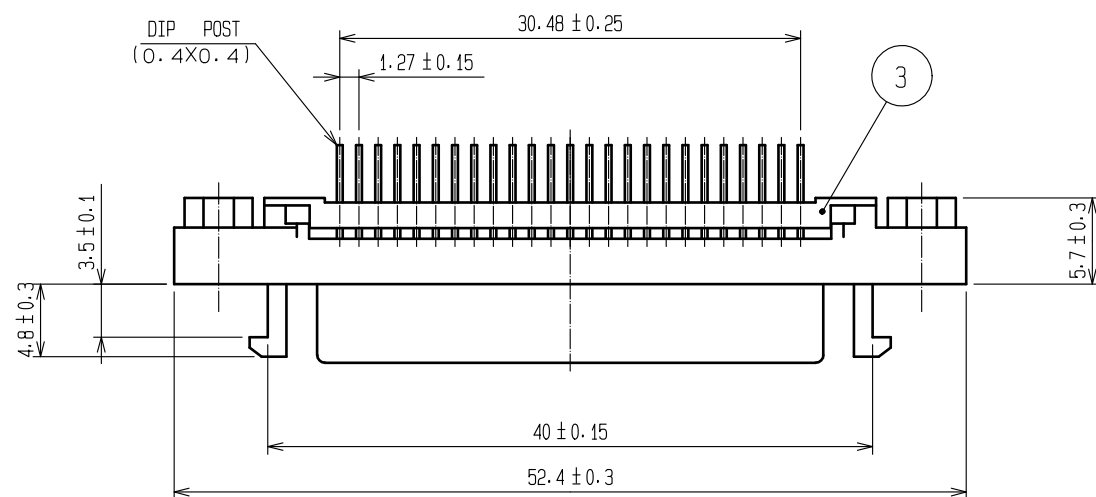


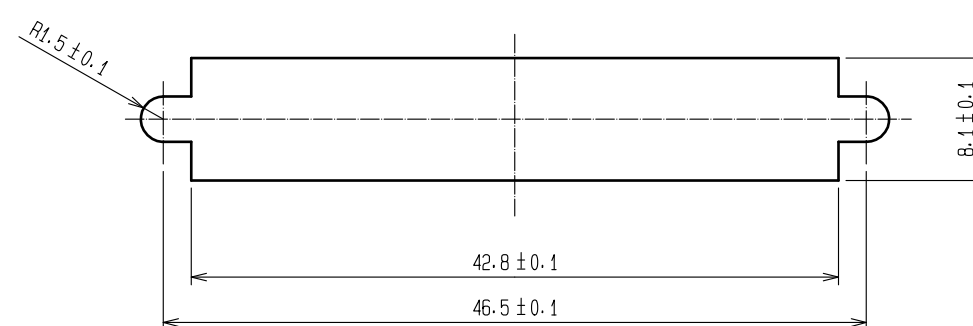


① ➤ PRODUCT - BOARD MOUNTED

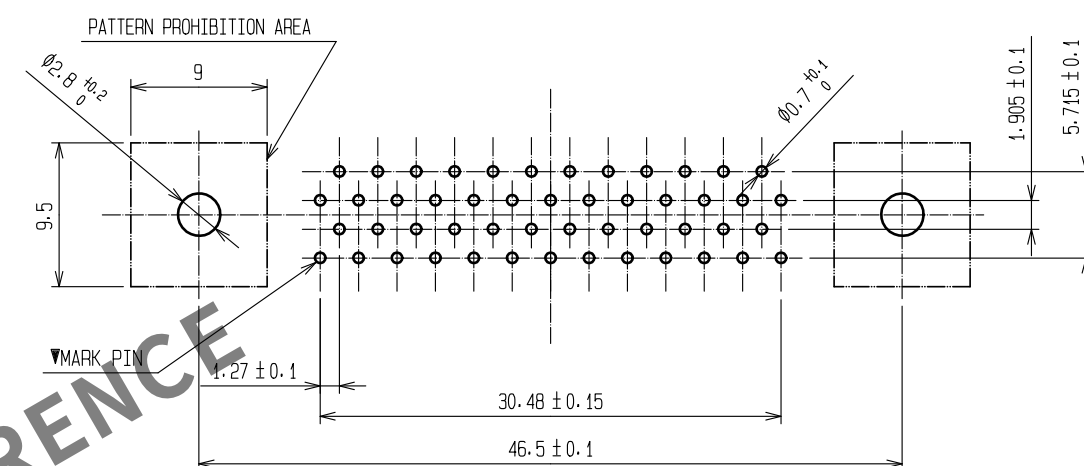

- ⚠ NOTES 1 ➤ This product must be screwed to the board.
Please prepare the screws by the customer.
<SCREW REQUIREMENTS>
NOMINAL DIAMETER: M2.6 x 0.45
SCREW LENGTH : 1.8 ± 0.45 + BOARD thickness 't'

3	PBT	UL94V-0						
2	PBT	UL94V-0			5	STEEL	NICKEL PLATING	
1	PROSPHOR BRONZE	SELECTIVE GOLD PLATING 0.3 μm			4	ZINC ALLOY DIE CASTING	NICKEL PLATING	
NO.	MATERIAL	FINISH, REMARKS			NO.	MATERIAL	FINISH, REMARKS	

UNITS mm		SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-E-00010989	DESIGNED KG. OKITA	CHECKED MN. KENJO	DATE 20220908
HIROSE ELECTRIC CO., LTD.					APPROVED +HO. MIWA	20050105	DRAWING NO. EDC3-040855-01	
					CHECKED +YH. ENAMI	20050105		
					DESIGNED +TU. TANIGUCHI	20050105	PART NO. DX20M-50S(50)	
					DRAWN +TU. TANIGUCHI	20050105		