


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

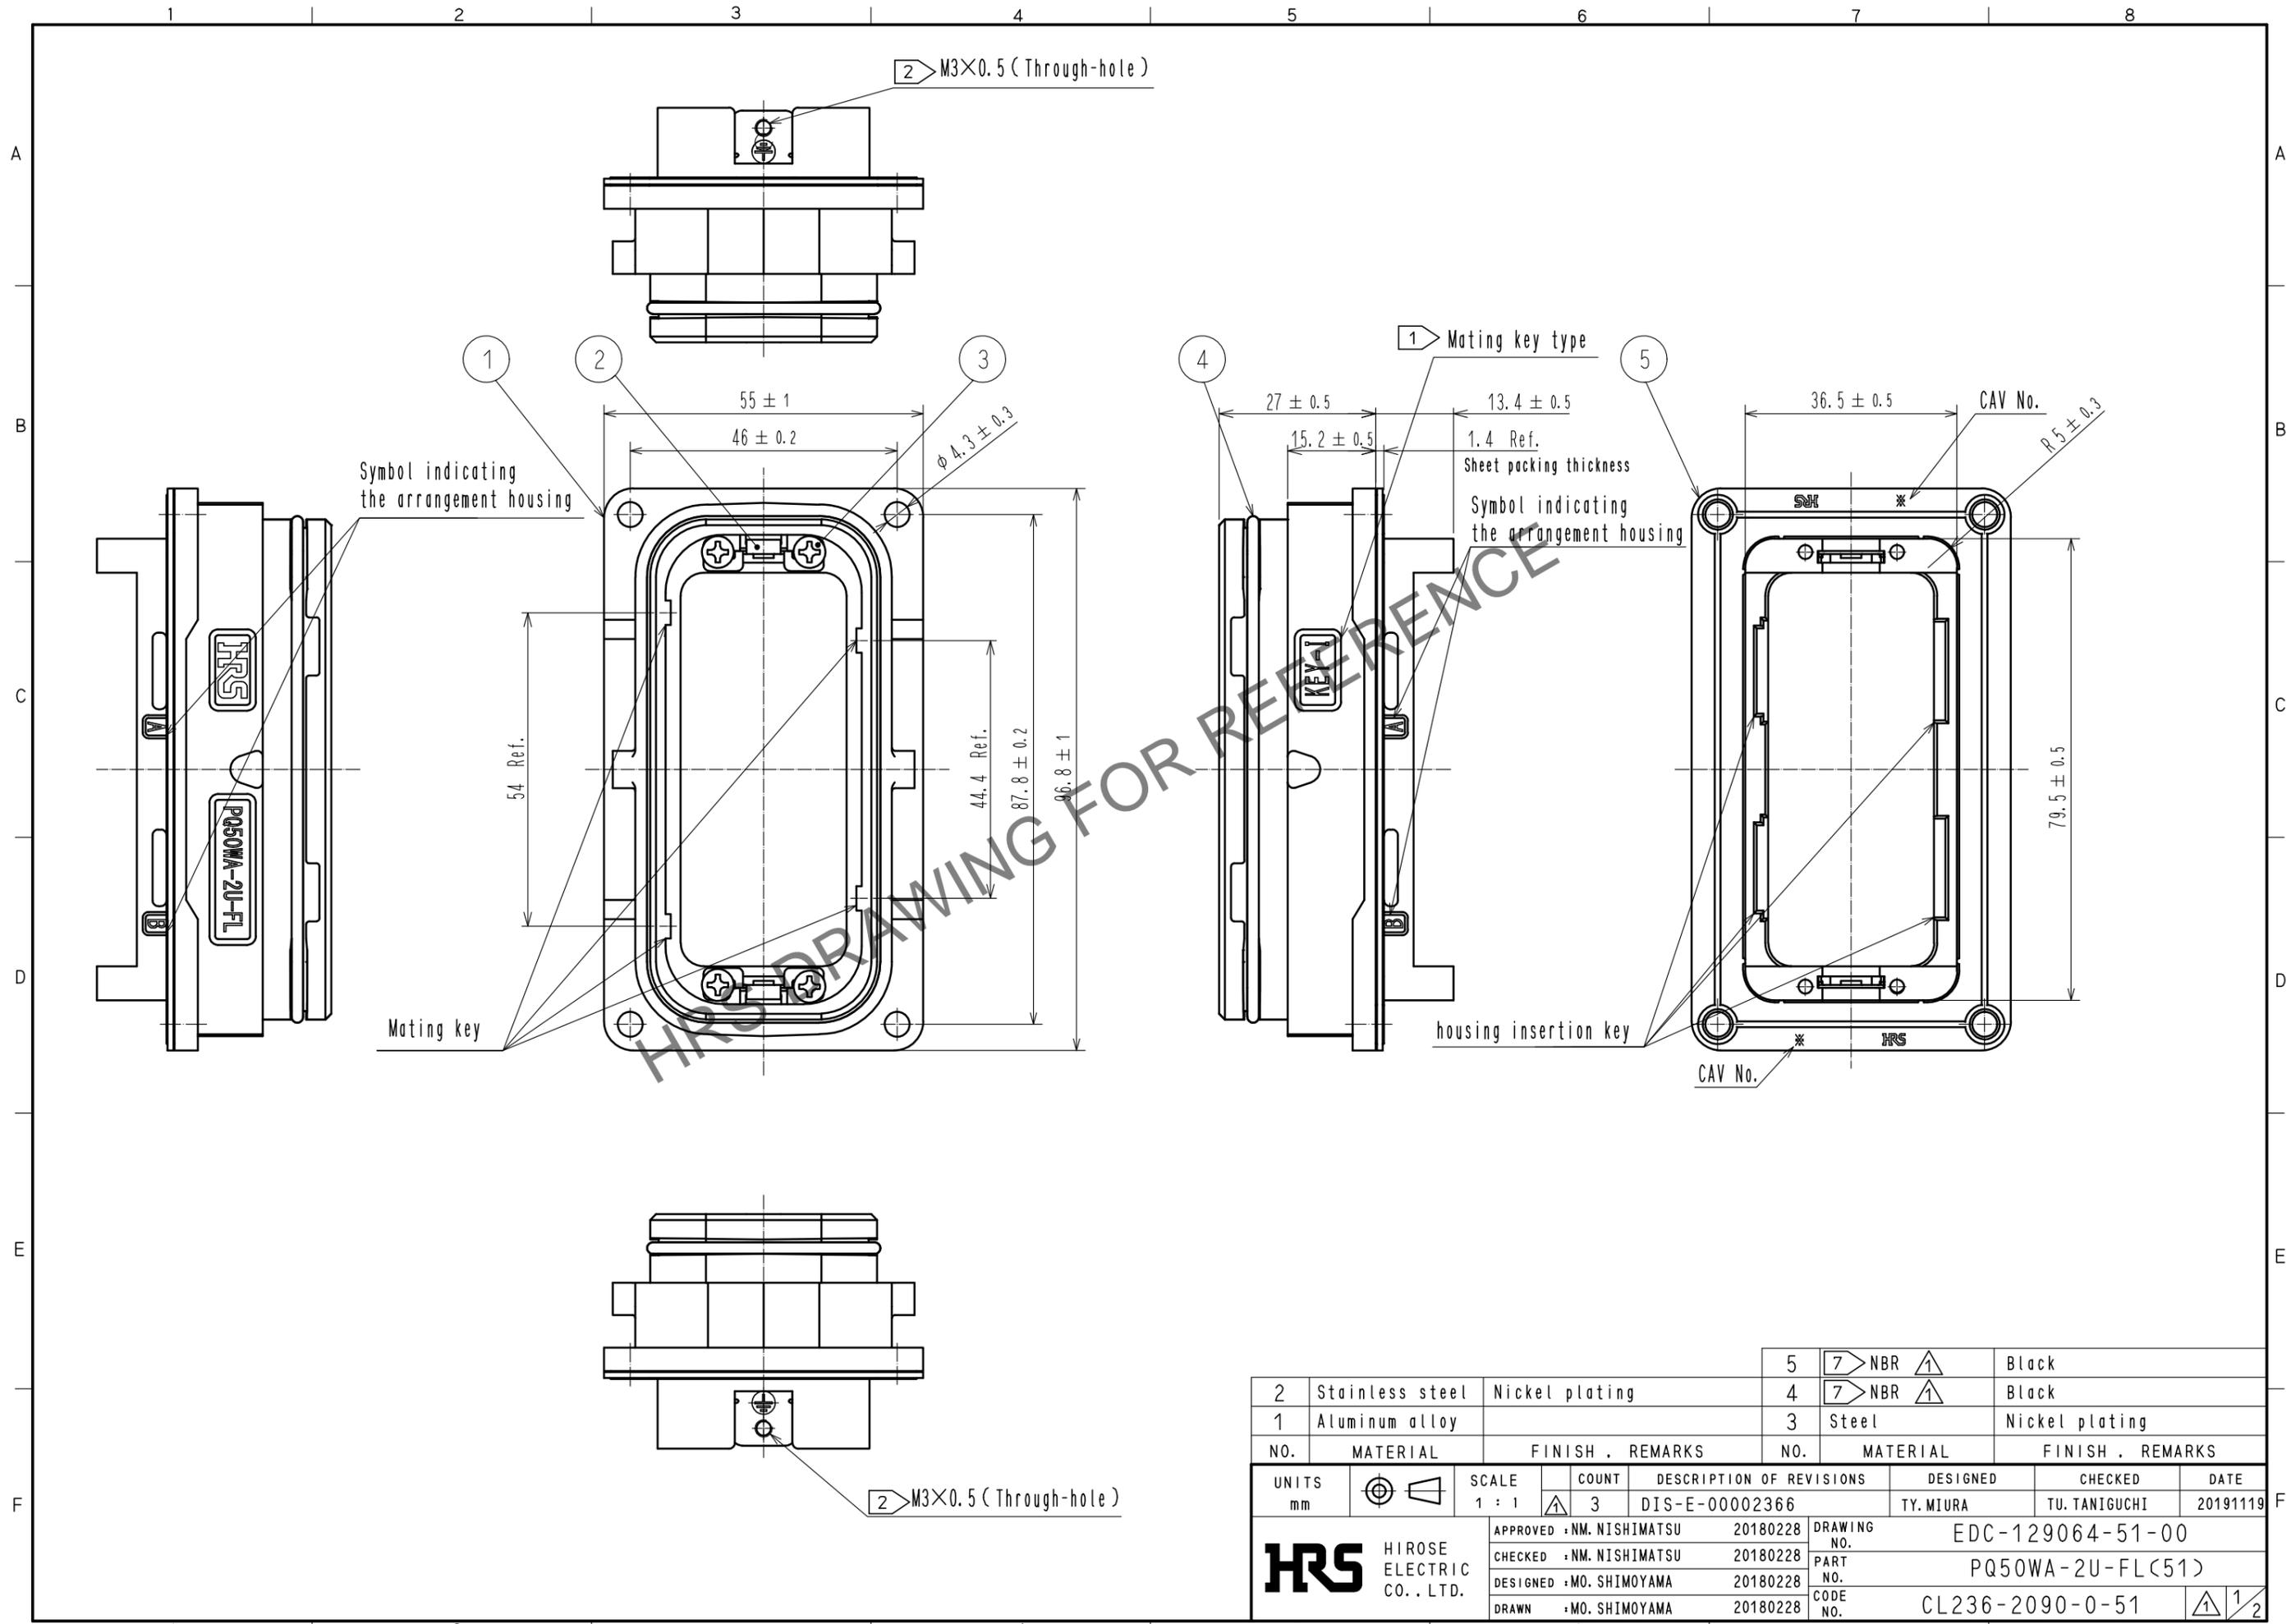

FORM HC0011-5-7

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
2	Stainless steel	Nickel plating	5	NBR	Black
1	Aluminum alloy		4	NBR	Black
			3	Steel	Nickel plating


UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	1 : 1	3	DIS-E-00002366	TY. MIURA	TU. TANIGUCHI	20191119

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
NM. NISHIMATSU 20180228	NM. NISHIMATSU 20180228	MO. SHIMOYAMA 20180228	MO. SHIMOYAMA 20180228	EDC-129064-51-00	PQ50WA-2U-FL(51)	CL236-2090-0-51

1/2

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

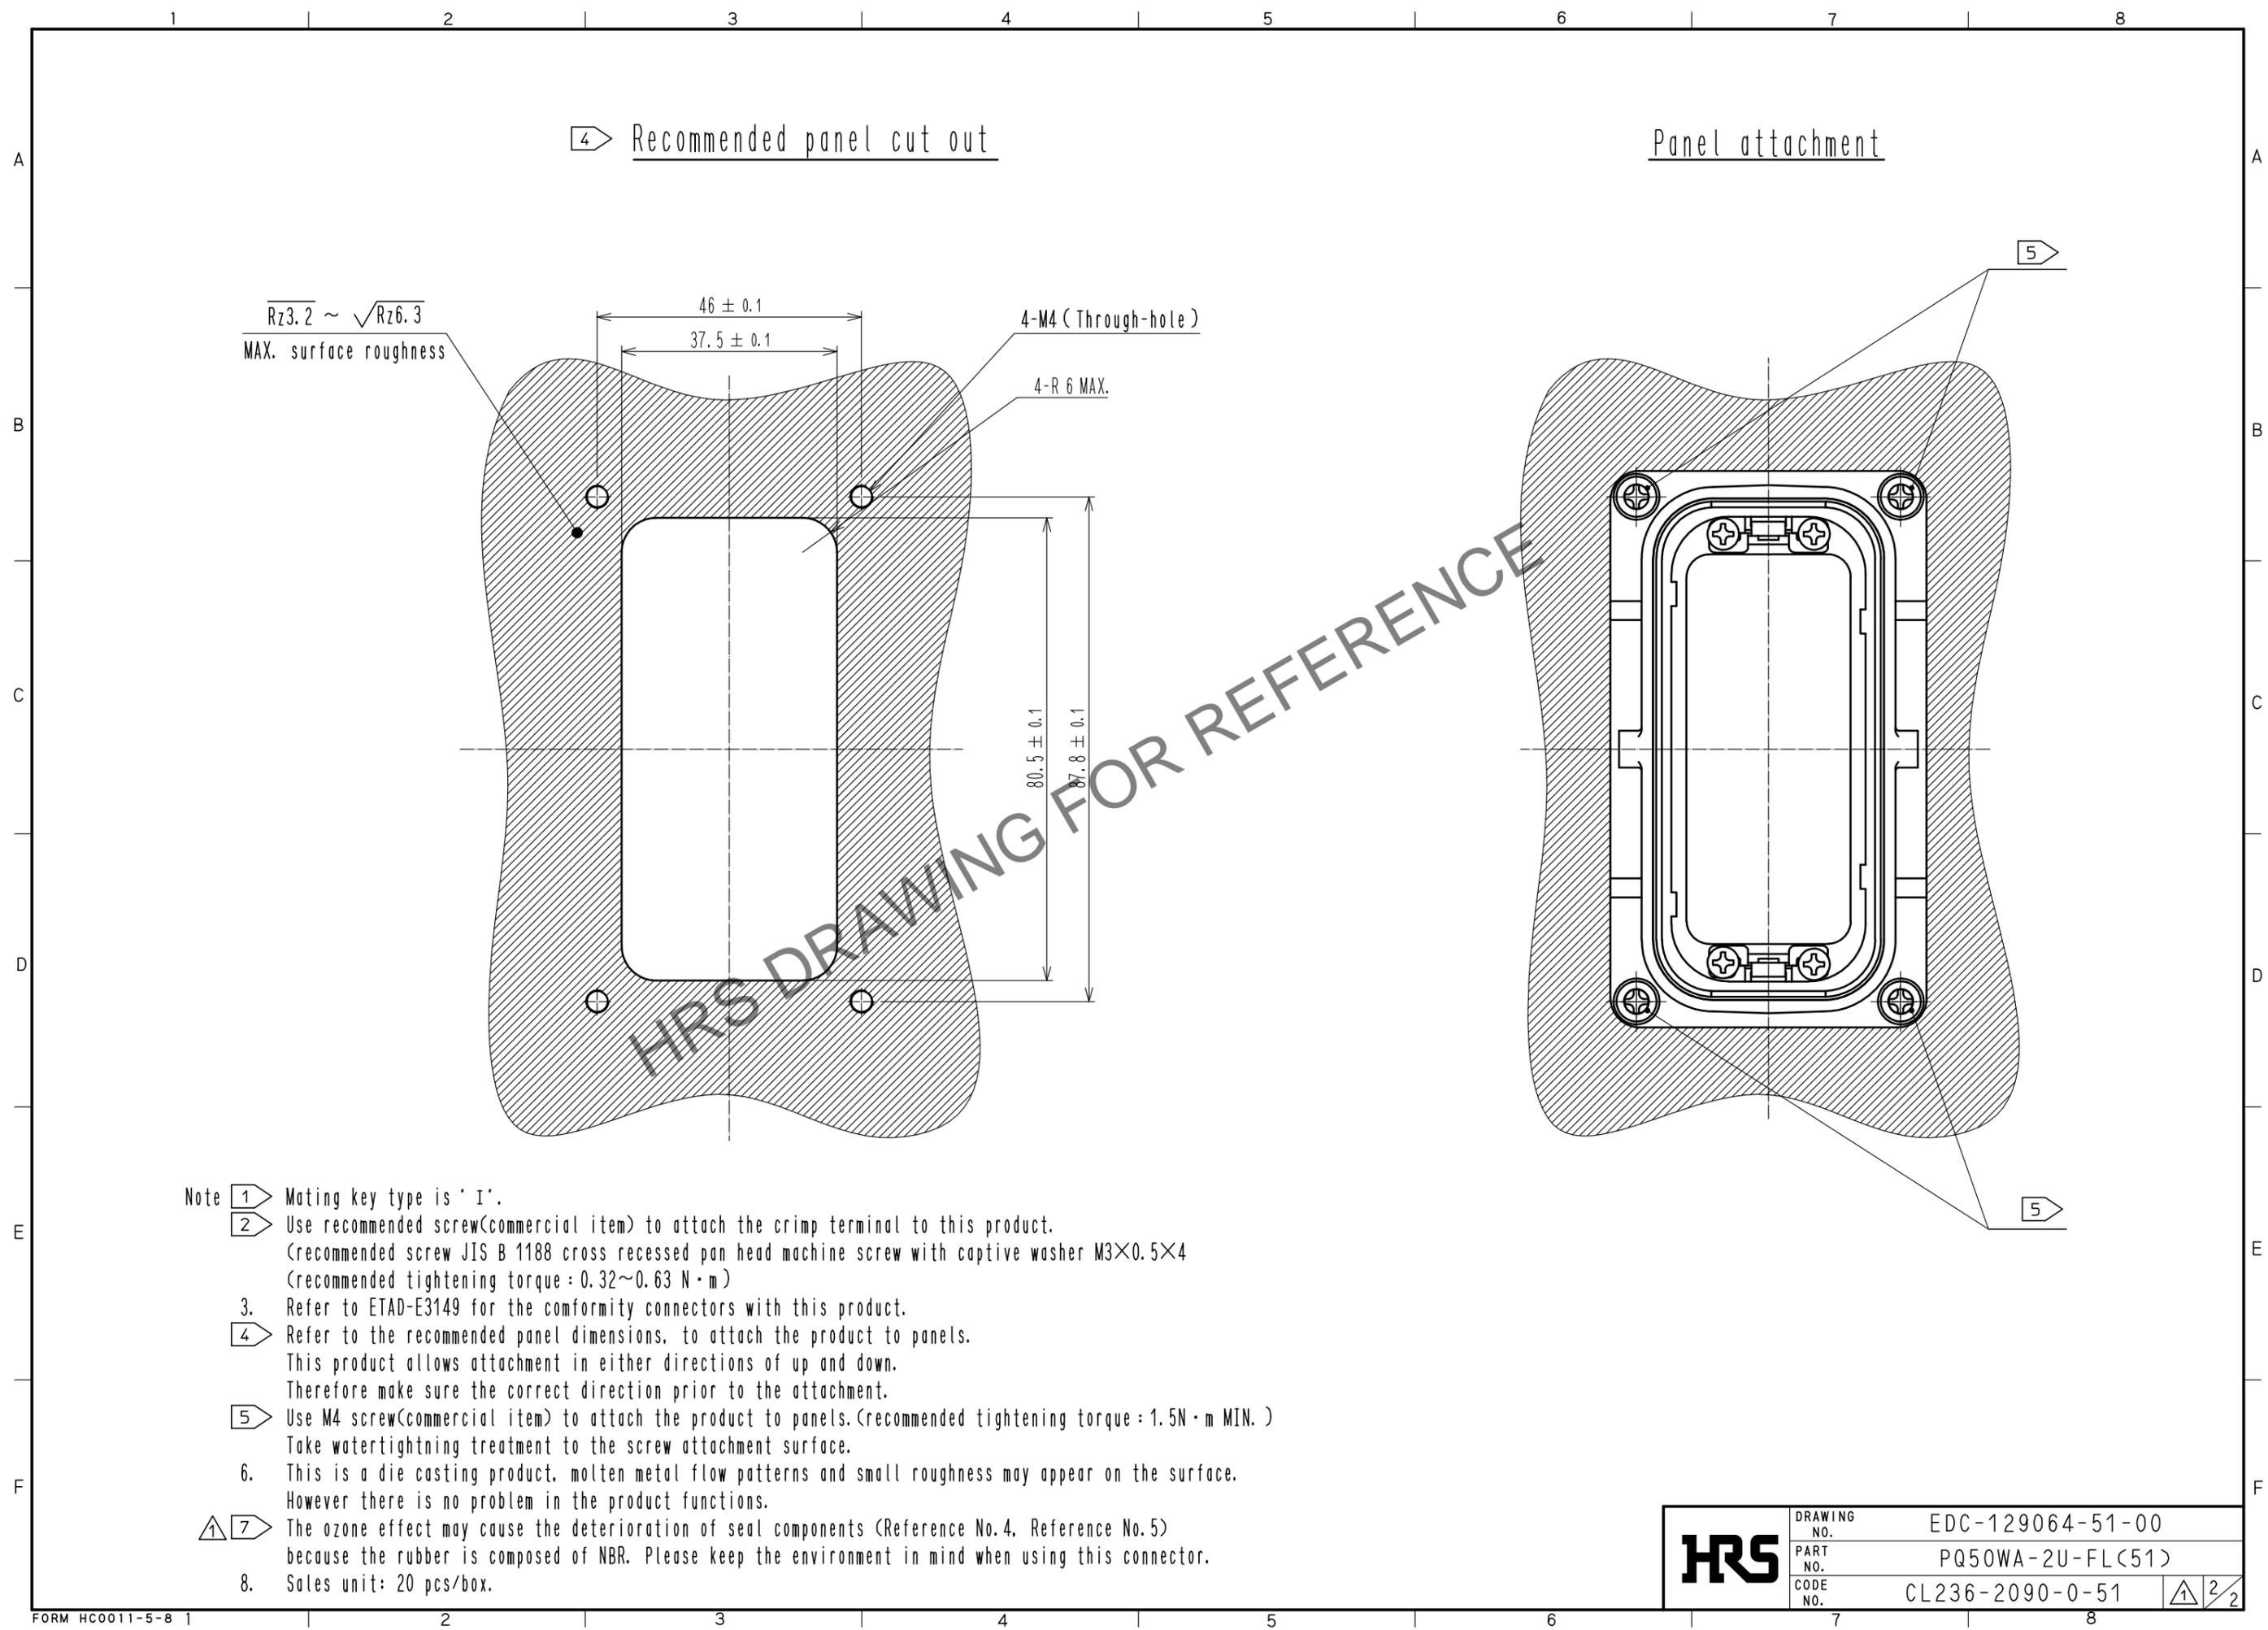

- Note
- 1 Mating key type is 'I'.
  - 2 Use recommended screw (commercial item) to attach the crimp terminal to this product.  
 (recommended screw JIS B 1188 cross recessed pan head machine screw with captive washer M3×0.5×4  
 (recommended tightening torque : 0.32~0.63 N·m)
  - 3. Refer to ETAD-E3149 for the conformity connectors with this product.
  - 4 Refer to the recommended panel dimensions, to attach the product to panels.  
 This product allows attachment in either directions of up and down.  
 Therefore make sure the correct direction prior to the attachment.
  - 5 Use M4 screw (commercial item) to attach the product to panels. (recommended tightening torque : 1.5N·m MIN.)  
 Take watertightening treatment to the screw attachment surface.
  - 6. This is a die casting product. molten metal flow patterns and small roughness may appear on the surface.  
 However there is no problem in the product functions.
  - 7 The ozone effect may cause the deterioration of seal components (Reference No.4, Reference No.5)  
 because the rubber is composed of NBR. Please keep the environment in mind when using this connector.
  - 8. Sales unit: 20 pcs/box.

<b>HRS</b>	DRAWING NO.	EDC-129064-51-00	
	PART NO.	PQ50WA-2U-FL(51)	
	CODE NO.	CL236-2090-0-51	△ 2/2