









V APPLICABLE STANDARD							
RATING	OPERATING TEMPERATURE RANGE	<div><div></div>1</div> -55°C TO +105°C	STORAGE TEMPERATURE RANGE	<div><div></div>2</div> -55°C TO +85°C			
	VOLTAGE	AC 600 V , DC 600 V (ONLY CONNECTOR) AC 300 V , DC 300 V (TUV·UL)	—	—			
	CURRENT	PQ50 (A) CONTACT: 19.0A/PIN (AWG#14) PQ50S (A) CONTACT: 12.5A/PIN (AWG#16 UL1007) 12.5A/PIN (AWG#18 UL1007) CONDUCT SPECIFIED CURRENT TO A SINGLE PIN OF CONTACTS.	APPLICABLE CABLE	·PQ50WA/S-10*/34*-UNIT AWG#14 TO AWG#22 (ONLY 10PIN) (UL-STYLE:UL1007, UL1015) ·OTHERS AWG#16 TO AWG#28 (UL-STYLE:UL1007)			
SPECIFICATIONS							
ITEM		TEST METHOD		REQUIREMENTS	QT	AT	
CONSTRUCTION							
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			X	X	
MARKING		CONFIRMED VISUALLY.			X	X	
ELECTRICAL CHARACTERISTICS							
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz) MAX.	<div><div></div>3</div> 5 mΩ MAX. (CONTACT SPACING)			X	-	
		<div><div></div>3</div> 50 mΩ MAX. (SHELL SPACING)			X	-	
INSULATION RESISTANCE	500 V DC.	5000 MΩ MIN.			X	-	
VOLTAGE PROOF	3310 V AC. FOR 1 min.	NO FLASHOVER OR BREAKDOWN.			X	-	
TEMPERATURE RISE	CONDUCT SPECIFIED CURRENT TO A SINGLE PIN OF BELOW CONTACTS. PQ50 (A) CONTACT ⇔ PQ50 (A) CONTACT (AWG#14 UL1015) (AWG#14 UL1015) CURRENT CARRIED:19A/PIN PQ50S (A) CONTACT ⇔ PQ50S (A) CONTACT (AWG#18 UL1007) (AWG#18 UL1007) CURRENT CARRIED:12.5A/PIN			MAX. 30°C INCREASE FROM AMBIENT TEMPERATURE.		X	-
MECHANICAL CHARACTERISTICS							
CONTACT INSERTION AND WITHDRAWAL FORCES	MEASURE WITH THE BELOW CONTACT PAIR. ① PQ50 (A) CONTACT ⇔ PQ50 (A) CONTACT ② PQ50S (A) CONTACT ⇔ PQ50S (A) CONTACT			① INSERTION FORCE : 3.0 N MAX. WITHDRAWAL FORCE : 1.0 N MIN. ② INSERTION FORCE : 3.0 N MAX. WITHDRAWAL FORCE : 0.3 N MIN.		X	-
CONNECTOR INSERTION AND WITHDRAWAL FORCES	MEASURE WITH THE LOCK LEVER RELEASED (ALL CONTACTS ARE ASSEMBLED) USE 2 UNITS OF PQ50WA/S-10*/34*-UNIT AND PQ50WASX-46*-UNIT.			INSERTION FORCE : 270 N MAX. WITHDRAWAL FORCE : 34 N MIN.		X	-
CONTACT (LANCE) RETENTION FORCES	APPLY AXIAL PULL OUT FORCE AT THE SPEED RATE OF 25mm/min TO THE TERMINAL, AND MESURE THE FORCE WHEN THE TERMINAL IS PULL OUT. ① PQ50 (A) -15P (S) CFA (AWG#14) ② PQ50S (A) -1822P (S) CFA (AWG#18)			① 68.6N MIN ② 29.4N MIN		X	-
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
<div><div></div>1</div>	5	DIS-E-00004837	HY. MATSUDA	TU. TANIGUCHI	20210325		
REMARK				APPROVED	RI. TAKAYASU	20160531	
ABOVE SPESIFICATION SHOWS THE VALUES IN ASSEMBLED CONDITION WITH “PQ50WA” SERIES.				CHECKED	NM. NISHIMATSU	20160531	
IN CASE OF USING FOR OTHER SERIES OF CONNECTOR,THE SPECIFICATION IS BASED ON				DESIGNED	WR. YAMADA	20160531	
EACH SERIES.				DRAWN	WR. YAMADA	20160531	
Unless otherwise specified, refer to IEC 60512.							
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-129287-00-00		
<div>HRS</div>	SPECIFICATION SHEET		PART NO.	PQ50WA-2UA-PC1			
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL0236-2097-0-00	<div><div></div>1</div>	1/3	


SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
ENVIRONMENTAL CHARACTERISTICS					
CONDUCTOR PRESSURE BONDING FORCES	CRIMP THE CABLE ONLY AT THE CONDUCTOR, AND RETENTION FORCE SHALL EXCEED THE SPECIFICATION WHEN PULL FORCE IS APPLIED. ①PQ50A - 15P(S)CFA (AWG#14 UL1015) ②PQ50S(A)-1618P(S)CFA (AWG#16 UL1007) ③PQ50S(A)-1822P(S)CFA (AWG#18 UL1007) ④PQ50S(A)-1822P(S)CFA (AWG#24 UL1007)	① 222.6 N MIN. ② 133.5 N MIN. ③ 89.0 N MIN ④ 22.3 N MIN.	X	-	
LOCK STRENGTH	APPLY 98 N PULL FORCE FOR 1 MINUTES TO THE PLUG IN MATING AXIAL DIRECTION WITH LOCKED CONDITION.	NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
LEVER OPERATION FORCE	MEASURE THE LEVER OPERATION FORCE FOR LOCK/UNLOCK.	LOCK : 205.8 N MAX. UNLOCK : 205.8 N MAX. 	X	-	
CABLE CLAMP STRENGTH	APPLY PULL FORCE OF 98 N IN MATING DIRECTION FOR A MINUTE.	① CONTACTS SHOULD BE RETAINED. ② NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
MECHANICAL OPERATION	100 TIMES INSERTIONS AND EXTRACTIONS.	 ① CHANGE IN CONTACT RESISTANCE OF CONTACTS : 20 mΩ MAX. ② NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
VIBRATION	FREQUENCY : 10 TO 55 Hz, SINGE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS. (REFERENCE FOR APPENDED FIGURE 2)	① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
SHOCK	IN OPPOSITE DIRECTIONS OF EACH 6 DIMENSION AXIS FOR 3 TIMES AT 490 m/s ² DURATIONS OF PULSE 11 ms.	① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → 15 TO 35 → 105 → 15 TO 35 °C TIME 30 → 2 TO 3 → 30 → 2 TO 3 min. UNDER 5 CYCLES.	 ① CHANGE IN CONTACT RESISTANCE OF CONTACTS : 20 mΩ MAX. ② NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
HEAT RESISTANCE	EXPOSED AT 105 °C ± 2 °C, 96 h, AND COMBINE THE APPLICABLE CONNECTORS.	 ① CHANGE IN CONTACT RESISTANCE OF CONTACTS : 20 mΩ MAX. ② INSULATION RESISTANCE : 1000 MΩ MIN. ③ NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
COLD RESISTANCE	EXPOSED AT -55 °C ± 3 °C, 96 h, AND COMBINE THE APPLICABLE CONNECTORS.	 ① CHANGE IN CONTACT RESISTANCE OF CONTACTS : 20 mΩ MAX. ② INSULATION RESISTANCE : 1000 MΩ MIN. ③ NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
HUMIDITY	EXPOSED AT 60 °C ± 2 °C, 90 TO 95 %, 96 h, AND COMBINE THE APPLICABLE CONNECTORS.	 ① CHANGE IN CONTACT RESISTANCE OF CONTACTS : 20 mΩ MAX. ② INSULATION RESISTANCE : 1000 MΩ MIN. (AFTER IT DRIER) ③ NO DAMAGE. CRACK AND LOOSENESS OF PARTS.	X	-	
MIXED FLOWING GUS	EXPOSED IN SO ₂ 10 ppm, H ₂ S 3 ppm, 70 TO 80 %, 24 h, AND COMBINE THE APPLICABLE CONNECTORS.	NO HEAVY CORROSIN RUIN THE FUNCTION.	X	-	
DUST/SPRASH PROTECTION	FOLLOW IEC60529 TESTS AND COMBINE THE APPLICABLE CONNECTORS.	IP65(IEC60529) MIN PROTECTED TO AVOID DUST INTRUSION. NO HARMFULL EFFECT FROM DIRECT WATER SPRASH FROM ANY DIRECTIONS.	X	-	
REMARK "A" IN PARENTHESIS PQ50(A) AND PQ50S(A) INDICATES SEQUENTIAL CONTACTS, PQ50A AND PQ50SA.  ① THE PRODUCT PERFORMANCE IS GUARANTEED ONLY IN THE TEMPERATURE ADEQUATE PEOPLE'S ACTIVITIES. ② INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING. ③ SPECIFICATIONS FOR ASSEMBLED ITEM WITH APPLICABLE HOUSING.  PACKING MATERIALS ARE NOT INCLUDED.  CABLE CONDUCTOR RESISTANCE IS NOT INCLUDED.					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.	ELC-129287-00-00		
	SPECIFICATION SHEET	PART NO.	PQ50WA-2UA-PC1		
	HIROSE ELECTRIC CO., LTD.	CODE NO	CL0236-2097-0-00		2/3

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



APPENDED FIGURE

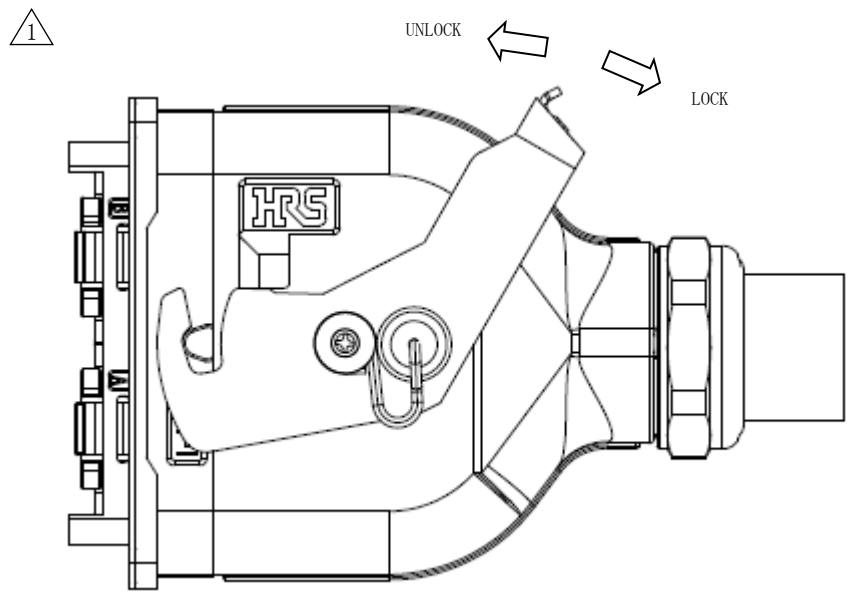APPENDED FIGURE 1. LEVER OPERATION FORCE

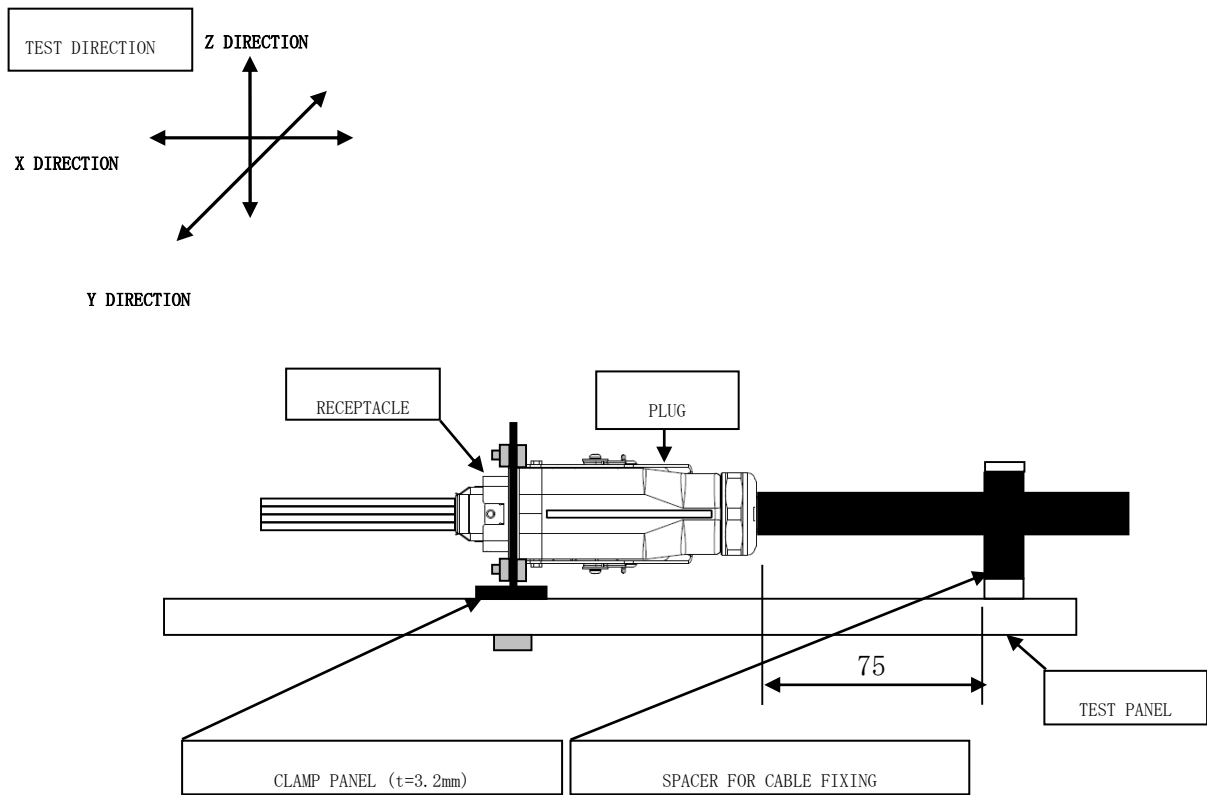

APPENDED FIGURE 2. VIBRATION TEST METHOD DIAGRAM(SIDE VIEW).



Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-129287-00-00	
	SPECIFICATION SHEET		PART NO.	PQ50WA-2UA-PC1		
	HIROSE ELECTRIC CO., LTD.		CODE NO	CL0236-2097-0-00		3/3