



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


RECOMMENDED PANEL CUTOUT(4:1)

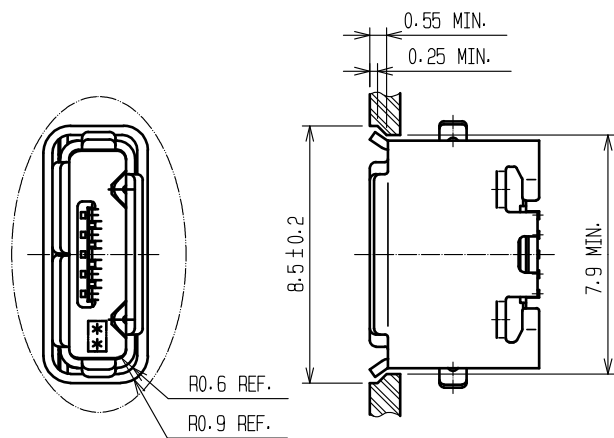

MATED WITH CORRESPONDING PLUG(4:1)





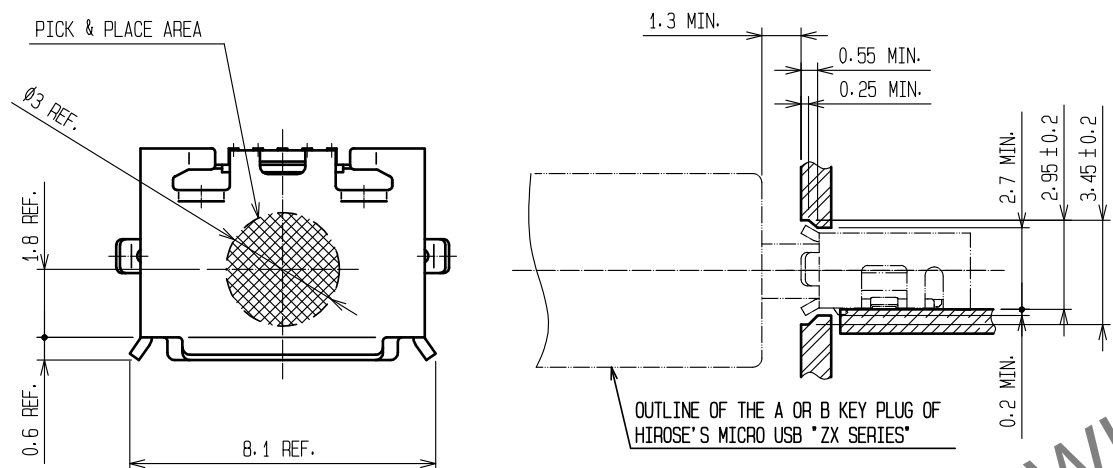


RECOMMENDED PC BOARD PATTERN

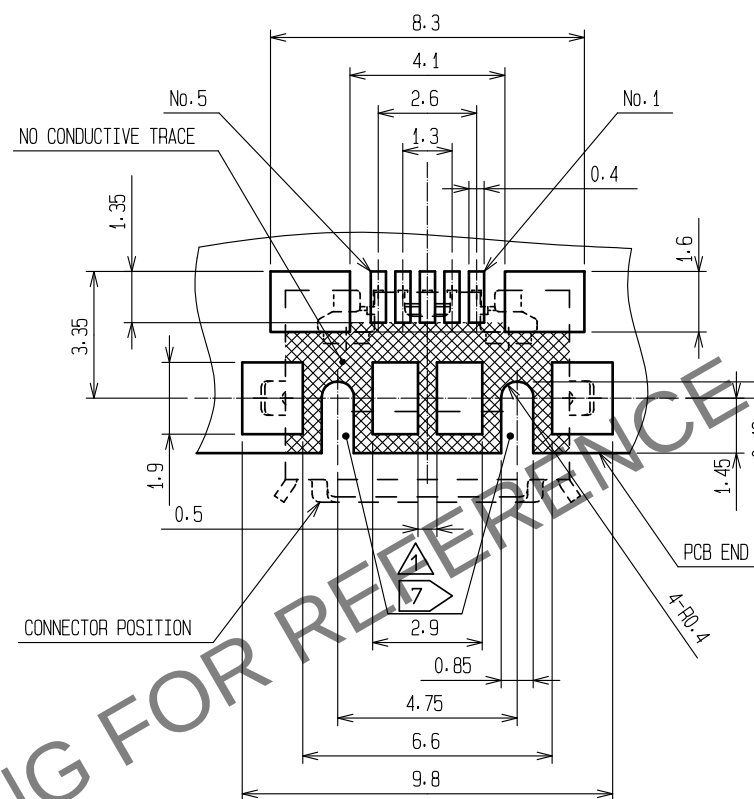

GENERAL TOLERANCE IS $\pm 0.05\text{mm}$

3 DRAWING FOR PACKING(FREE)

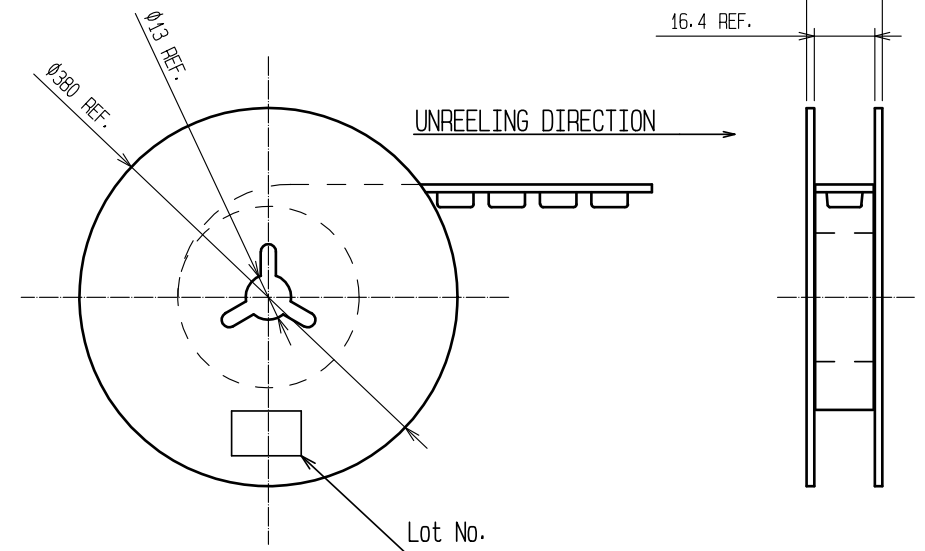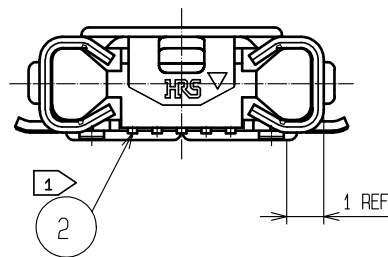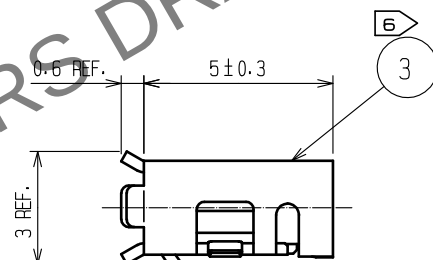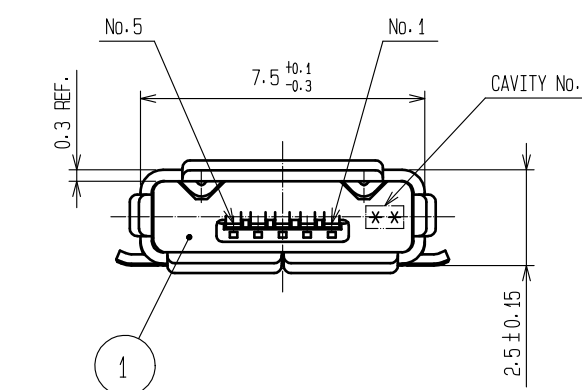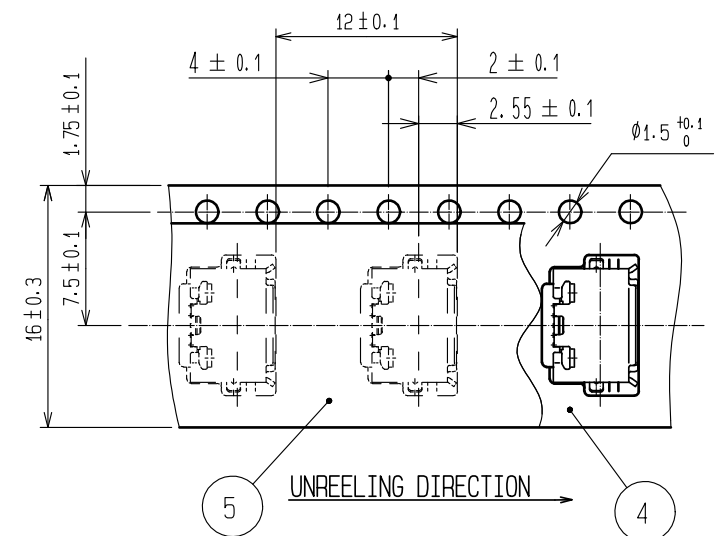

- NOTES.
- 1 CO-PLANARITY IS WITHIN 0.08mm MAX.
 - 2 PLATING
CONTACT AREA :GOLD 0.75μm MIN.
LEAD AREA :GOLD 0.05μm MIN.
UNDER PLATING:NICKEL 2μm MIN.
 - 3 PER REEL : 2000 pcs.
 4. INTERFACE DIMENSIONS CONFORMS TO USB2.0 SPECIFICATION.
 5. AS FOR PART No.3, THE PERFORMANCE REMAINS GOOD EVEN IF THERE IS A RUBBING WOUND BY THE ASSEMBLY PROCESS.
 - 6 AS FOR PART No.3, THERE IS NO PROBLEM ON THE QUALITY THOUGH THERE MIGHT BE A DIFFERENCE IN THE COLOR DEPENDING ON THE PLATING PROCESSING LOT.

- 7 PCB CUTOUTS ARE NECESSARY TO PREVENT THE LOCK FROM HITTING THE PCB WHEN MATING PLUG.

2	COPPER ALLOY	2	5	PE	
1	LCP	GRAY UL94V-0	4	PS	
NO.	MATERIAL	FINISH . REMARKS	3	STAINLESS STEEL	TIN PLATING 1μm Min. LUBRICANT
UNITS mm	SCALE 5 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-00011746	DESIGNED KIM JAEHYEON	CHECKED KG. OKITA
APPROVED : NM. NISHIMATSU	20151027	DRAWING NO.	EDC-126373-30-00		
CHECKED : KN. ICHIKAWA	20151027	PART NO.	ZX62R-AB-5P(30)		
DESIGNED : TS. ITO	20151027	CODE NO.	CL0242-0035-3-30		
DRAWN : AK. AKIYAMA	20151027				