


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

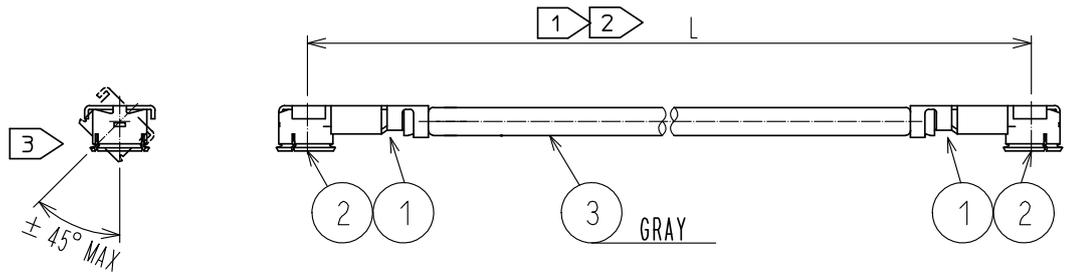

NOTE 1 We indicate the length of the harness on the last of product name. 'L' part.


2 Tolerance for [L]

L (mm)	STANDARD TOLERANCE
35 ≤ L ≤ 200	± 4 mm
200 < L ≤ 500	± 8 mm
500 < L ≤ 1000	± 12 mm
1000 < L	± 1.5% mm

3 Connector rotation angle is within ±45 degree from the above image. For long length in the case of L>500, the angle is optional.

4. Specifications are subject to change without notice.


[DIMENSIONS OF CONNECTOR]

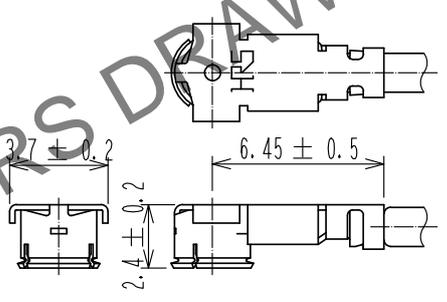

⚠ For stable supply of this series, material supplier of piece part#1 will be changed during 2019-2022. Please note this change in advance. There will be no difference in product performance and quality

[PRECAUTIONS FOR HANDLING]

- ◆ Connector insertion and extraction
 - a. Connector shall be extracted vertically by specialised extraction JIG. Part No. : H.FL-LP-NCCL Code:CL331-0551-7) Never hold the cable when extracting the cable because it damages the connector.
 - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.

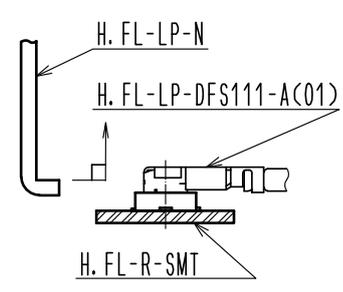

2	H.FL-LP CONTACT	CL331-0511-2		
1	H.FL-LP-DFS111-A(C01)	CL331-0507-5-01	3	1.5Dia. coaxial cable
NO.	PART NO.	CODE NO.	NO.	PART NO.

UNITS mm		SCALE FREE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			1	DIS-D-00003994	MK. INOUE	NK. NINOMIYA	20190419
		APPROVED : NK. NINOMIYA 20161108		DRAWING NO. EDC-373620-00-00			
		CHECKED : NK. NINOMIYA 20161108		PART NO. H.FL-2LP(A)-111-A-L			
		DESIGNED : KS. TAKAHASHI 20161108		CODE NO. CL321-5111-4-00			
		DRAWN : KS. TAKAHASHI 20161108					