











In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△				• •	△				• •
	△				• •	△				• •
	△				• •	△				• •

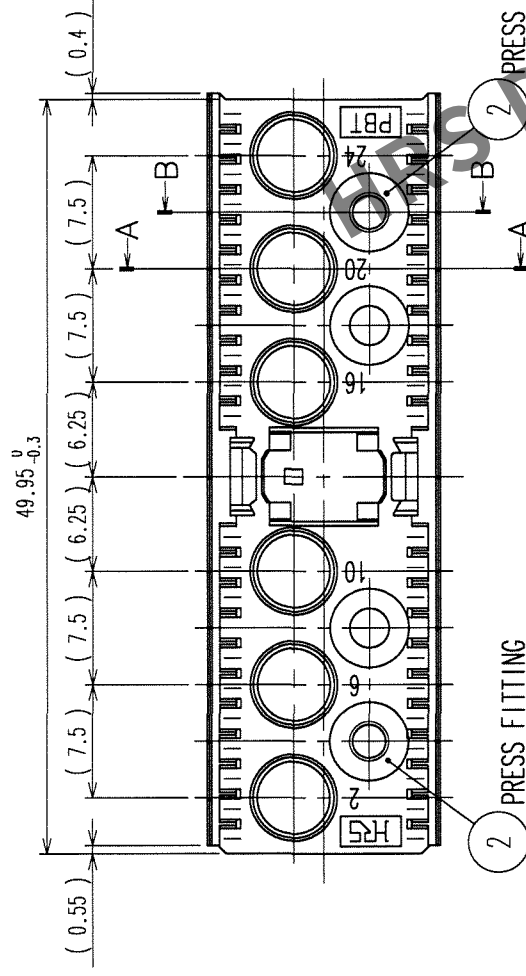

RECOMMENDED PC BOARD PATTERN (MOUNTING SIDE)

THE DIMENSIONAL TOLERANCE OF EACH HOLE POSITION TO BE ± 0.05 .

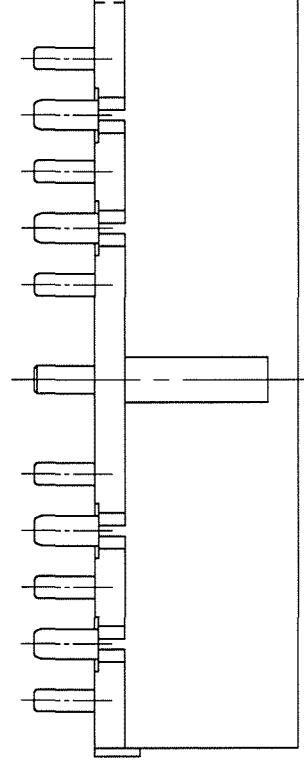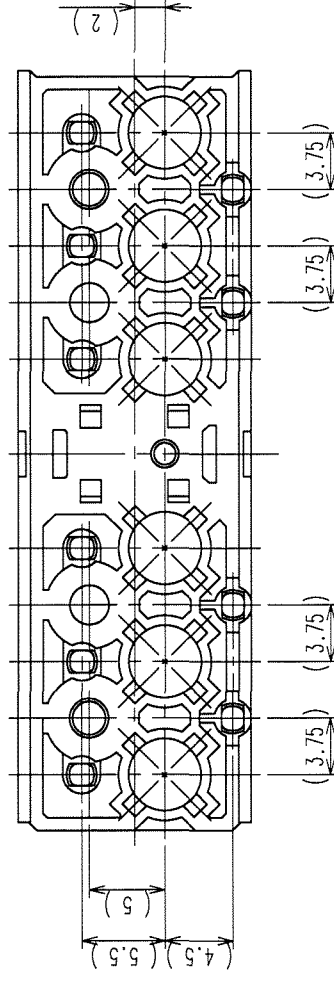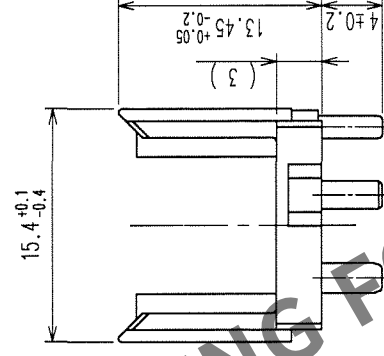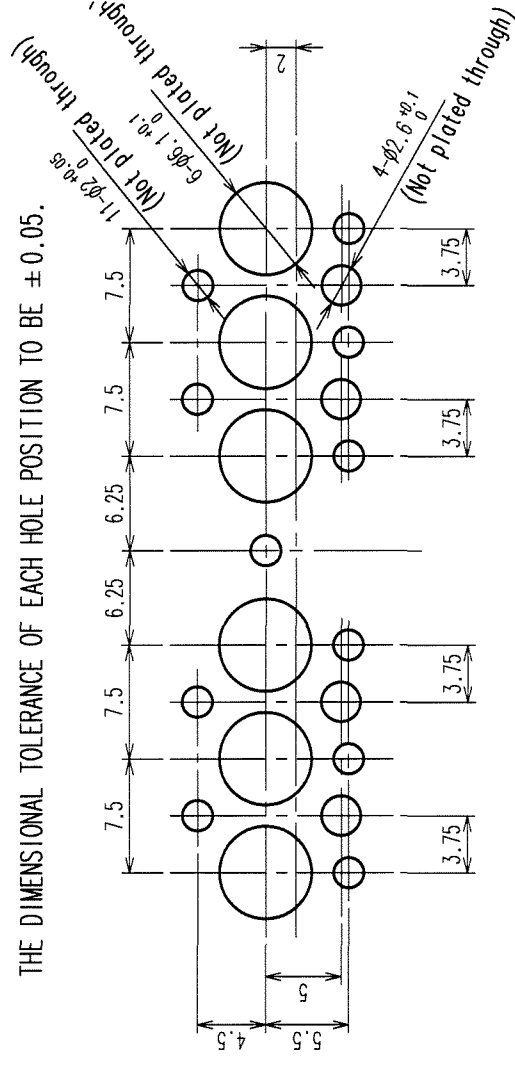

1	PBT	(DEEP BROWN)UL94V-0	2	BRASS	NICKEL PLATING		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)		RoHS COMPLIANT	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			R.K IMURA	R.K IMURA	M. Yamane	I. Mitani	
			05. 08. 08	05. 08. 08	05. 08. 08	05. 08. 08	.
DRAWING NO.		PART NO.		PO21M-6S-PA-S(40)			
EDC3-136366-40							
SCALE							
2 : 1							
UNITS	HIROSE ELECTRIC CO., LTD		CODE NO.	CL330-0301-3-40			
mm				1/1			

TO	RF			
----	----	--	--	--