
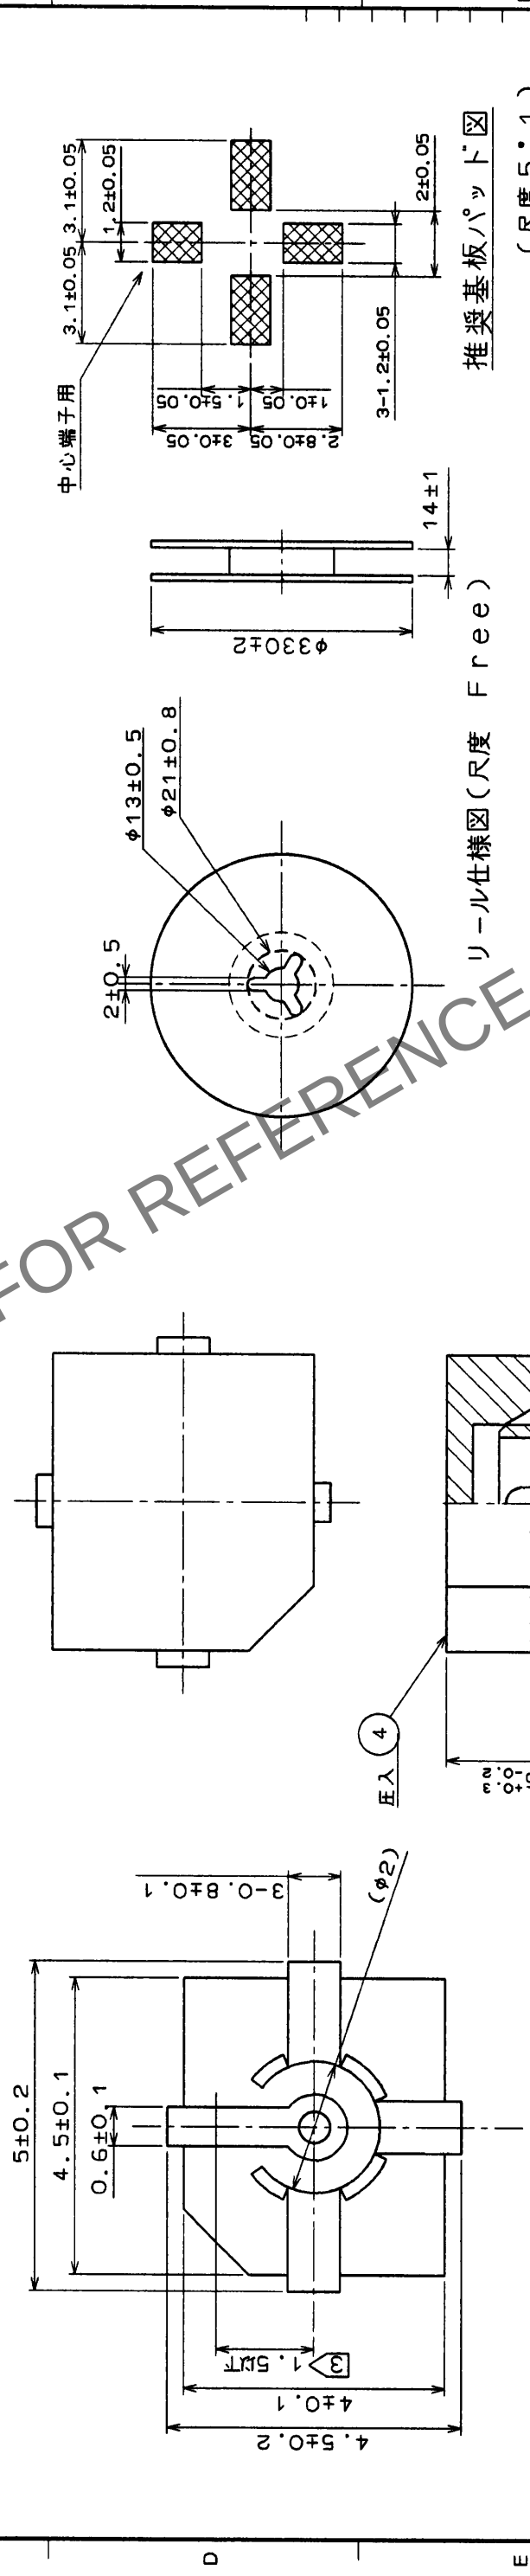


Δの数 COUNT	訂正記事 DESCRIPTION OF REVISIONS	担当 BY	検図 CHKD	年月日 DATE
3	RE-D-1410	小松	三谷	93.2.24
Δ				
Δ				
Δ				

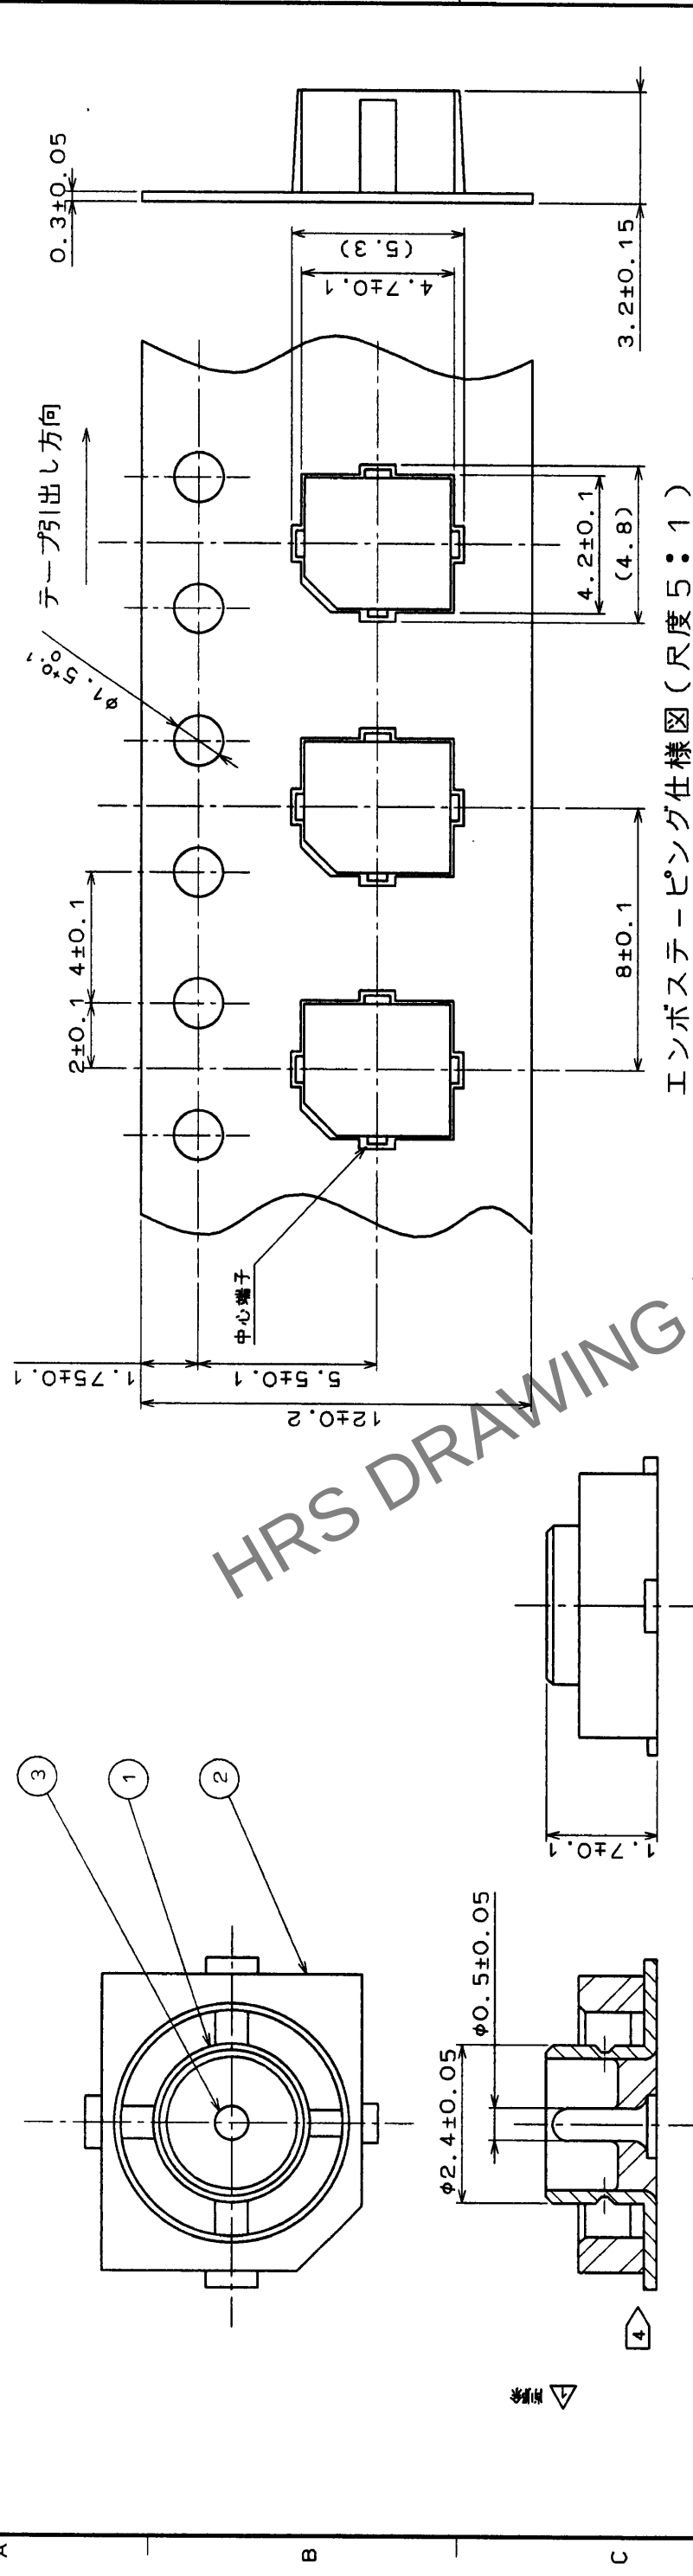

2	LCP樹脂	(クロ)	UL94V-0	4	PA樹脂	(ベージュ)	UL94V-0
1	りん青銅	銀めっき		3	銅		金めっき
部番	材質	処理	備考	部番	材質	処理	備考
旧製品コード CODE NO. (OLD) CL399-6454-8				製品コード CODE NO. CL331-0522-9-10			
一般公差 GENERAL DIMENSION TOLERANCE				図名 DRAWING NAME 承認 ☒			
寸法		公差		寸法		公差	
mm		%		mm		%	
5		±0.3		5		±0.3	
6		±0.5		6		±0.5	
18		±0.7		18		±0.7	
50		±1		50		±1	
125		±1.3		125		±1.3	
250		±2		250		±2	
500		±2		500		±2	
1000		±2		1000		±2	
2000		±2		2000		±2	
4000		±2		4000		±2	
8000		±2		8000		±2	
16000		±2		16000		±2	
32000		±2		32000		±2	
64000		±2		64000		±2	
128000		±2		128000		±2	
256000		±2		256000		±2	
512000		±2		512000		±2	
1024000		±2		1024000		±2	
2048000		±2		2048000		±2	
4096000		±2		4096000		±2	
8192000		±2		8192000		±2	
16384000		±2		16384000		±2	
32768000		±2		32768000		±2	
65536000		±2		65536000		±2	
131072000		±2		131072000		±2	
262144000		±2		262144000		±2	
524288000		±2		524288000		±2	
1048576000		±2		1048576000		±2	
2097152000		±2		2097152000		±2	
4194304000		±2		4194304000		±2	
8388608000		±2		8388608000		±2	
16777216000		±2		16777216000		±2	
33554432000		±2		33554432000		±2	
67108864000		±2		67108864000		±2	
134217728000		±2		134217728000		±2	
268435456000		±2		268435456000		±2	
536870912000		±2		536870912000		±2	
1073741824000		±2		1073741824000		±2	
2147483648000		±2		2147483648000		±2	
4294967296000		±2		4294967296000		±2	
8589934592000		±2		8589934592000		±2	
17179869184000		±2		17179869184000		±2	
34359738368000		±2		34359738368000		±2	
68719476736000		±2		68719476736000		±2	
137438953472000		±2		137438953472000		±2	
274877906944000		±2		274877906944000		±2	
549755813888000		±2		549755813888000		±2	
1099511627776000		±2		1099511627776000		±2	
2199023255552000		±2		2199023255552000		±2	
4398046511104000		±2		4398046511104000		±2	
8796093022208000		±2		8796093022208000		±2	
17592186044416000		±2		17592186044416000		±2	
35184372088832000		±2		35184372088832000		±2	
70368744177664000		±2		70368744177664000		±2	
140737488355328000		±2		140737488355328000			

注1 H.FL-R-SMT(C)(10)のコネクタ数量は250K0／リールです。

2 部番④のキャップは実装後取りはずして下さい。

△③②中心端子にモールドの樹脂がかかる許容値を示します。

△④①SMTリード部先端の平坦度は0.1以下とする。