


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


⚠️ 【 ASSEMBLE TOOL 】

- ① Jig for soldering outer conductor: SMP-J/SO-MD1
- ② Jig for soldering center conductor: SMP-J/SO-MD2
- ③ Attachment for inspection of dimension for mating area: SMP-J/IN-MD
- ④ Base for inspection of dimension for mating area: SMP/IN-MD-BASE

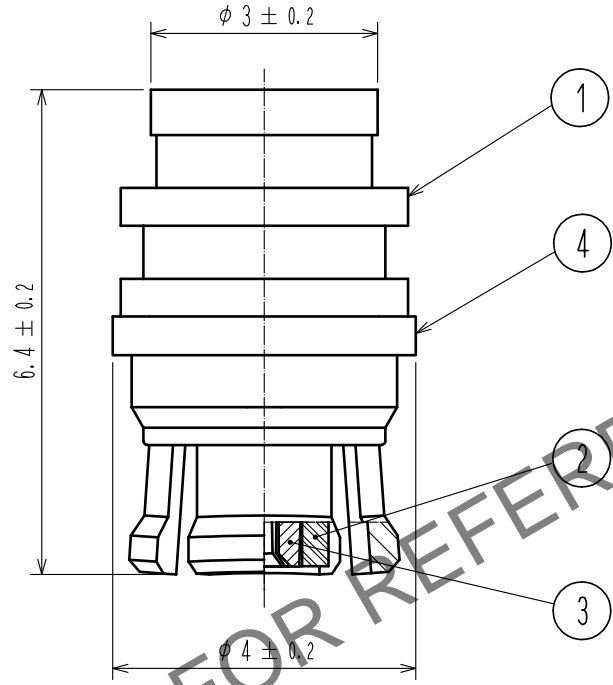

【 USAGE PRECAUTIONS 】

- ① Please insert or extract a SMP jack as perpendicularly as possible to a receptacle. If aligned insertion or extraction is not performed, it could damage or deform an outer conductor part of the jack.
 Recommend using an extraction jig for the jack
- ② Semi-flexible cable is made solder connection with a connector. If excess load on the soldered section is applied, it could damage or deform the section.
 Please handle it with care.

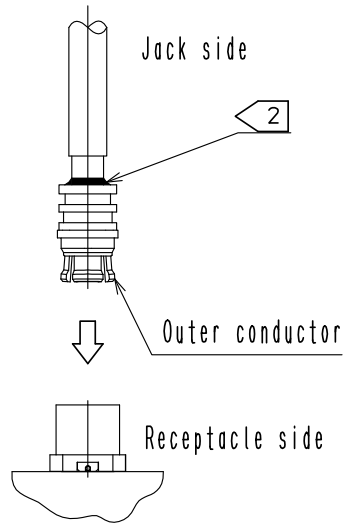

| 2 | PTFE | | 4 | BRASS | GOLD PLATING |
|---------------------------|-----------------|----------------------------------|------------------------------|--|-------------------------|
| 1 | BERYLIUM COPPER | GOLD PLATING | 3 | BERYLIUM COPPER | GOLD PLATING |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |
| UNITS mm | | SCALE 10: 1 | COUNT ⚠️ 1 | DESCRIPTION OF REVISIONS DIS-D-00005251 | DESIGNED TM. YOSHIDA |
| HIROSE ELECTRIC CO., LTD. | | APPROVED : TO. KATAYAMA 20171101 | DRAWING NO. EDC-373427-00-00 | | |
| | | CHECKED : KY. SHIMIZU 20171101 | PART NO. SMP-J-SF085 | | |
| | | DESIGNED : TM. YOSHIDA 20171101 | CODE NO. CL338-1100-0-00 | | |
| | | DRAWN : TM. YOSHIDA 20171101 | 1/1 | | |