

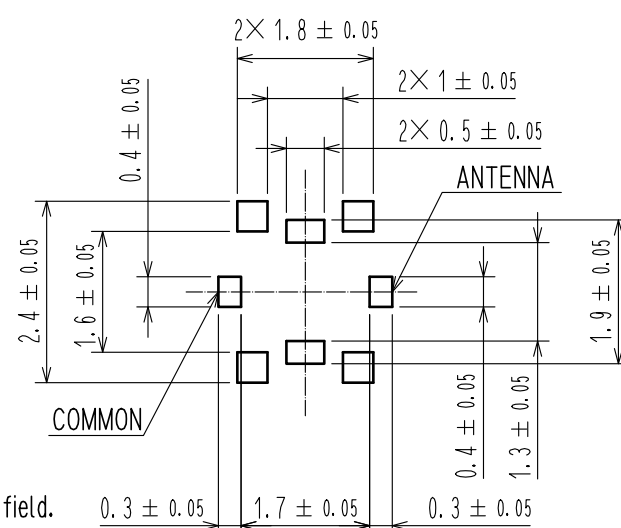


5 SPECIFIED STENCIL PLATE  
THICKNESS: 0.1mm








 :This area must be free of conductive traces and resist field.



2. For use of this product, be sure to put contact area of plug on position P perpendicularly.
- ③ Lead co-planarity is to be 0.1mm MAX.
4. Do not use the washing process.
- ⑤ Please do not change the specified layout of the PCB dimension and the layout of the stencil plate dimension and thickness otherwise could not be responsible for the solderability of the product.
6. This product is intended to be used for circuit inspection only. Consult us if any other application is considered.
7. Do not use hand soldering for mounting of MS-156C3.

3	CU-NI-SI-ALLOY	SELECTIVE GOLD PLATING	6	PET	
2	PA-M		5	PS	
1	PHOSPHOR BRONZE	GOLD PLATING	4	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 10 : 1	 3	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00014617	DESIGNED MT. KANEKO	CHECKED NK. NINOMIYA	DATE 20230124
 <div> <div>HIROSE</div> <div>ELECTRIC</div> <div>CO., LTD.</div> </div>					APPROVED : MH. YAMANE 20131129 CHECED : NK. NINOMIYA 20131128 DESIGNED : TS. NAKAGAWA 20131127 DRAWN : TS. NAKAGAWA 20131127	DRAWING NO. EDC3-350543-00 PART NO. MS-156C3 CODE NO. CL0358-0340-0-00		
					 3	 1/2		

Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

