
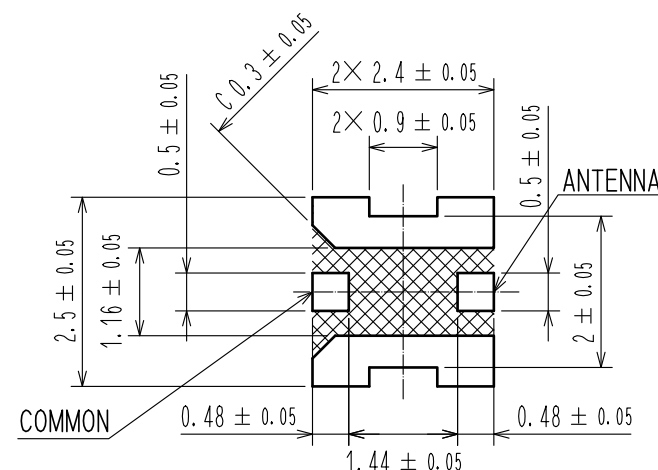
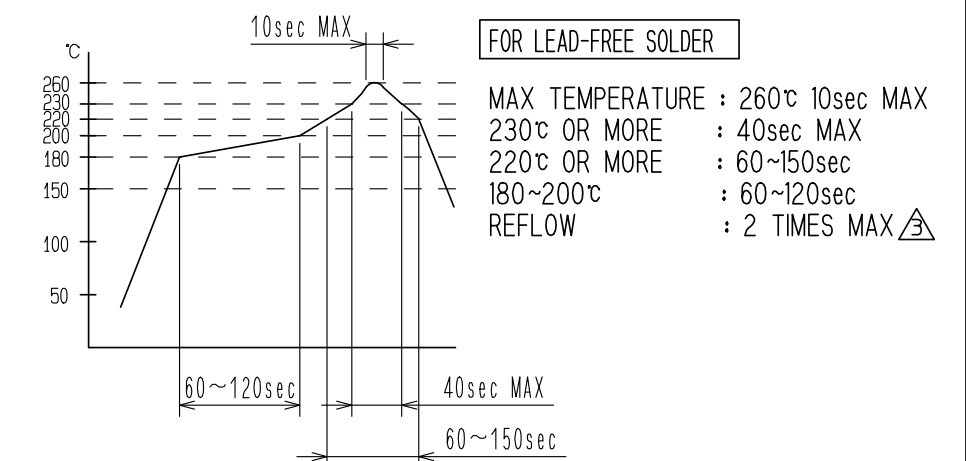


5 SPECIFIED PCB LAYOUT



5 SPECIFIED STENCIL PLATE  
THICKNESS: 0.1mm

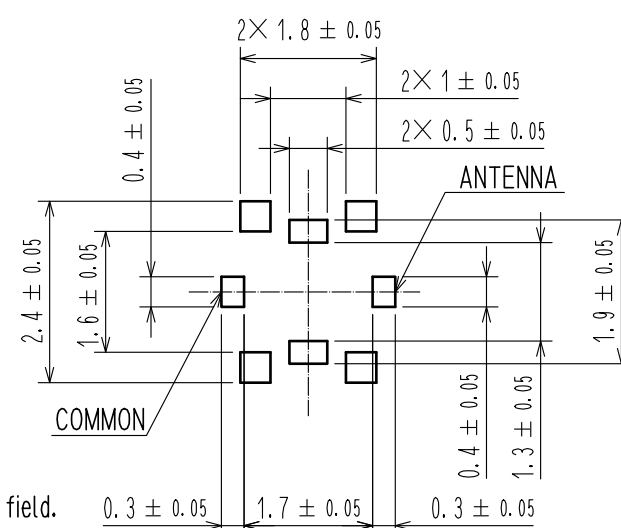

 :This area must be free of conductive traces and resist field.








NOTE 1. Circuit shall be as follows.



2. For use of this product, be sure to put contact area of plug on position P perpendicularly.
- ③ Lead co-planarity is to be 0.1mm MAX.
4. Do not use the washing process.
- ⑤ Please do not change the specified layout of the PCB dimension and the layout of the stencil plate dimension and thickness otherwise could not be responsible for the solderability of the product.
6. This product is intended to be used for circuit inspection only. Consult us if any other application is considered.
7. Do not use hand soldering for mounting of MS-156C3.

HALOGEN FREE COMPLIANT

3	CU-NI-SI-ALLOY	SELECTIVE GOLD PLATING		6	PET			
2	PA-M			5	PS			
1	PHOSPHOR BRONZE	GOLD PLATING		4	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00014617	DESIGNED MT. KANEKO	CHECKED NK. NINOMIYA	DATE 20230124
 HIROSE ELECTRIC CO., LTD.	APPROVED : MH. YAMANE		20140327		DRAWING NO. EDC3-350543-20			
	CHECED : NK. NINOMIYA		20140327		PART NO. MS-156C3(20)			
	DESIGNED : TS. NAKAGAWA		20140326		CODE NO. CL0358-0340-0-20			
	DRAWN : TS. NAKAGAWA		20140326		 			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

