


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

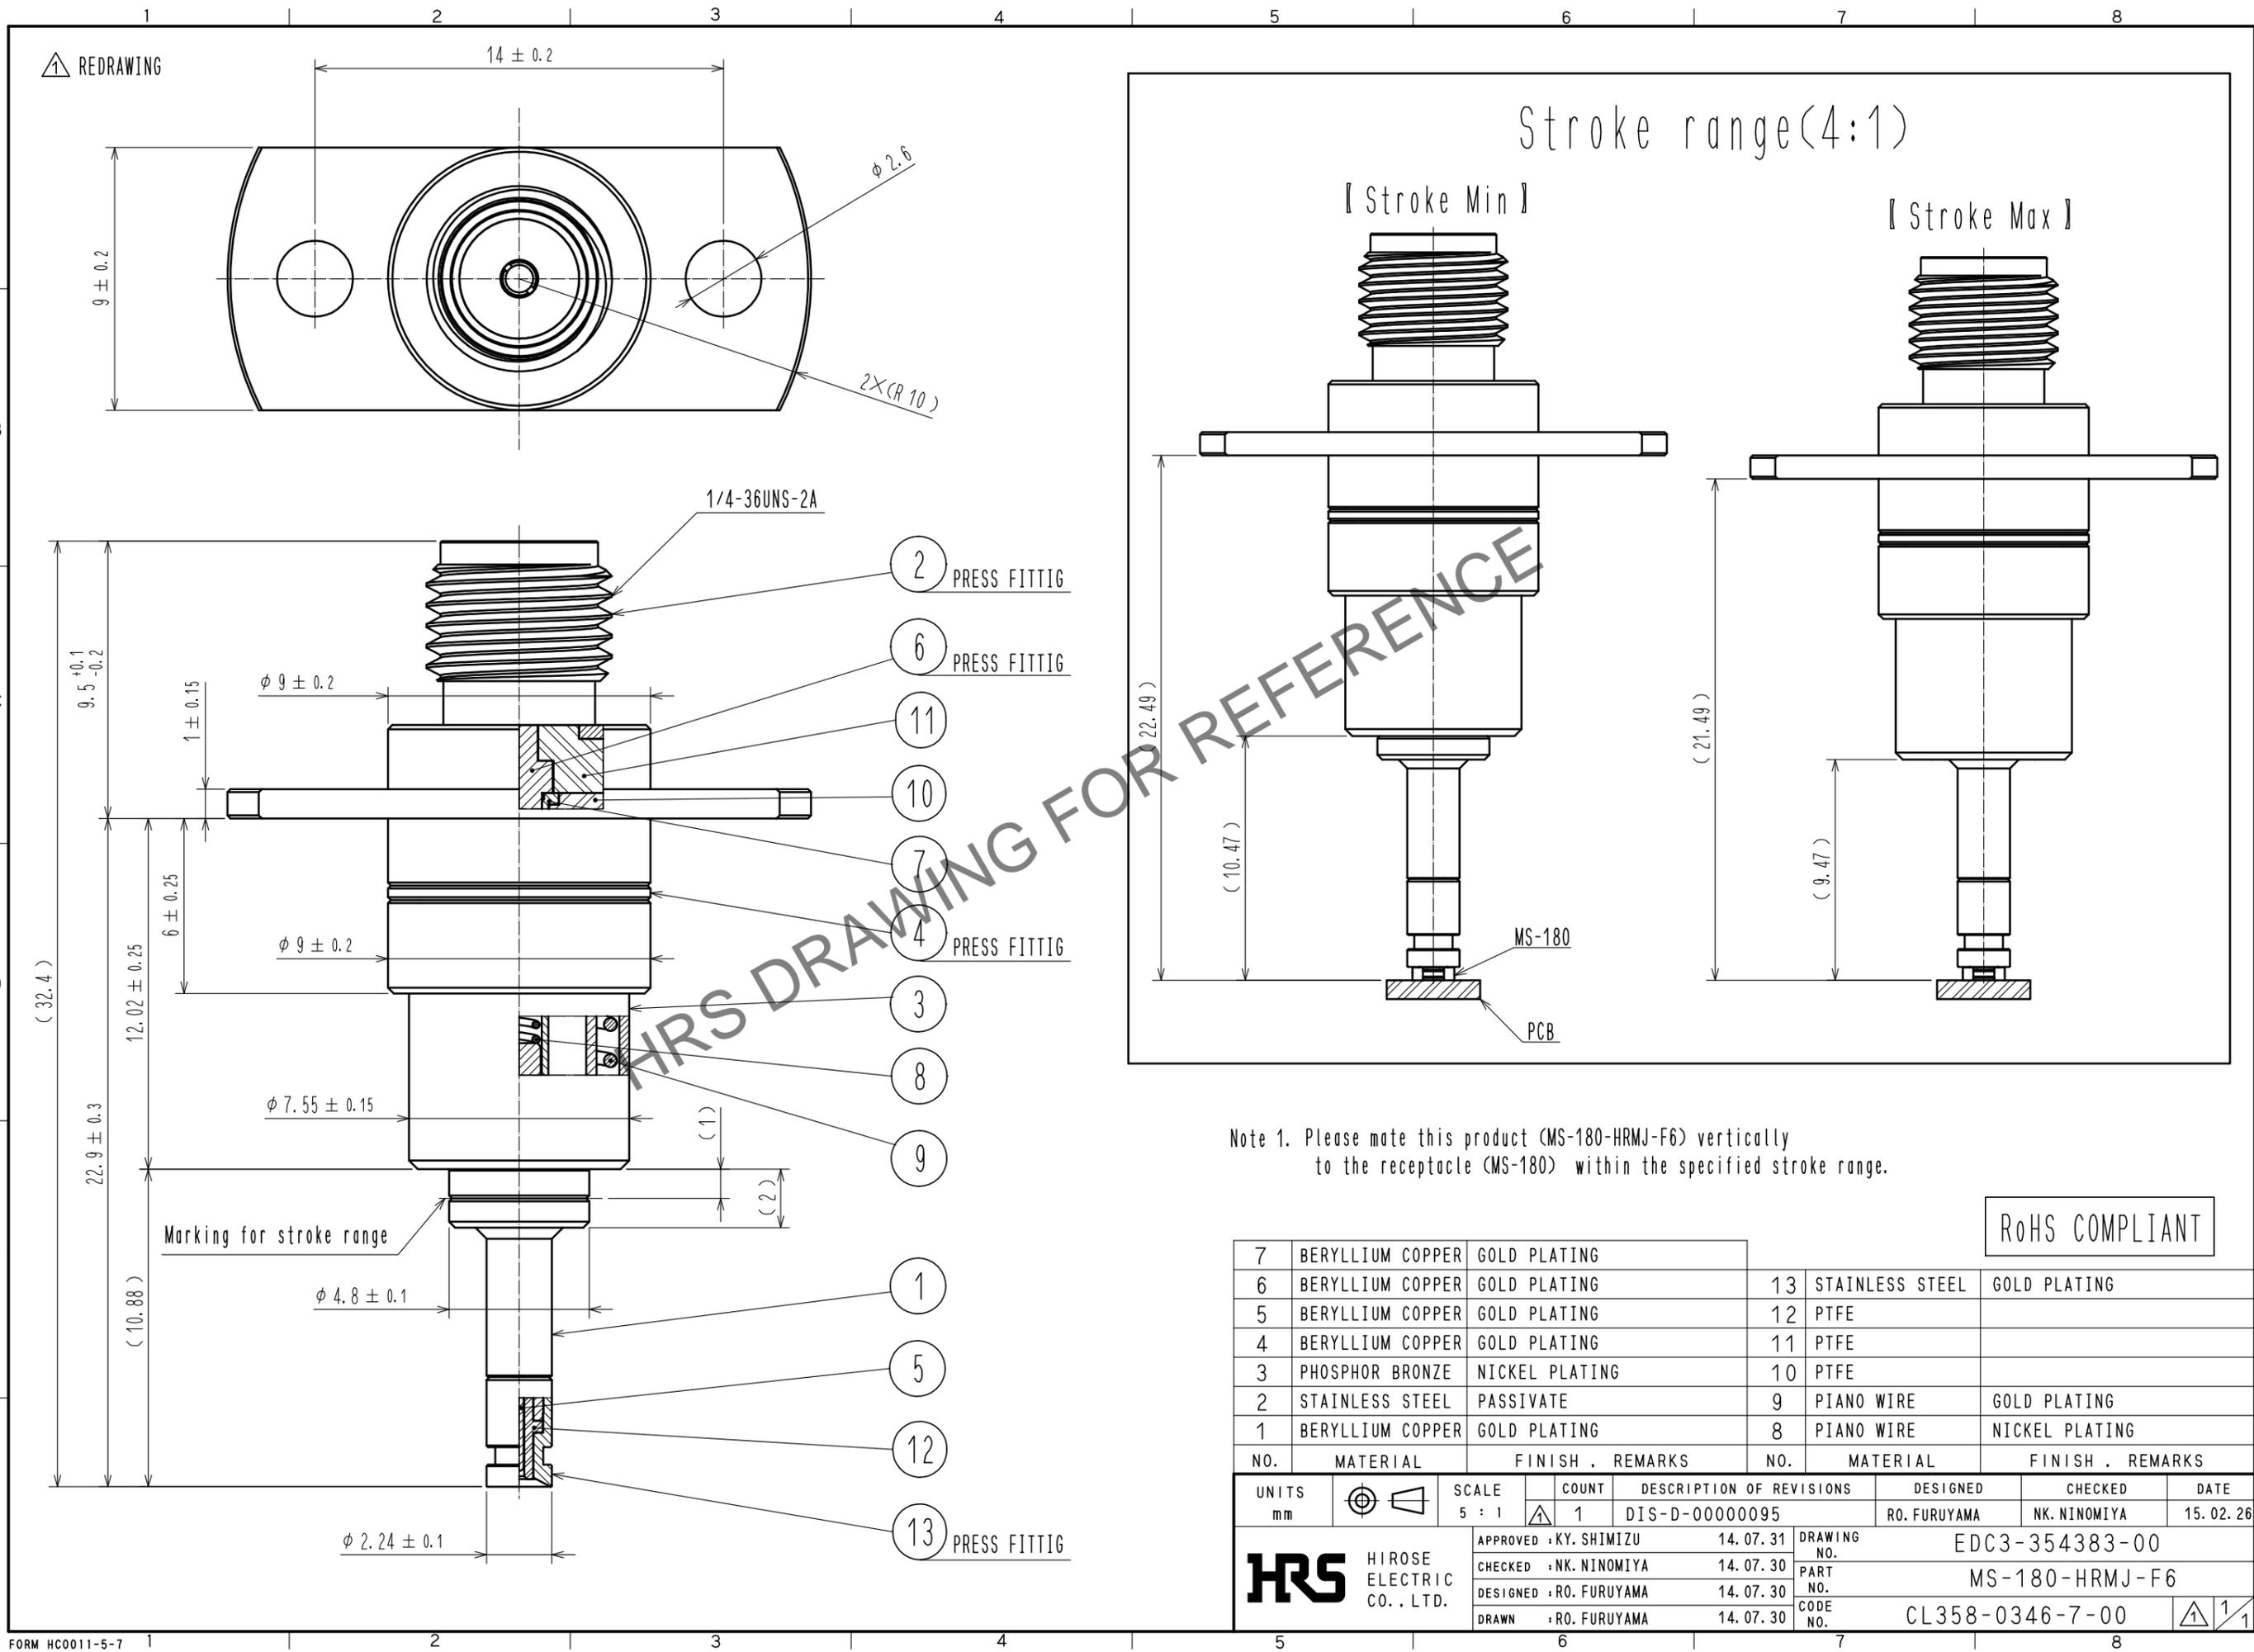

Stroke range(4:1)

【 Stroke Min 】

【 Stroke Max 】

HRS DRAWING FOR REFERENCE

Note 1. Please mate this product (MS-180-HRMJ-F6) vertically to the receptacle (MS-180) within the specified stroke range.

RoHS COMPLIANT

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
7	BERYLLIUM COPPER	GOLD PLATING		13	STAINLESS STEEL	GOLD PLATING	
6	BERYLLIUM COPPER	GOLD PLATING		12	PTFE		
5	BERYLLIUM COPPER	GOLD PLATING		11	PTFE		
4	BERYLLIUM COPPER	GOLD PLATING		10	PTFE		
3	PHOSPHOR BRONZE	NICKEL PLATING		9	PIANO WIRE	GOLD PLATING	
2	STAINLESS STEEL	PASSIVATE		8	PIANO WIRE	NICKEL PLATING	
1	BERYLLIUM COPPER	GOLD PLATING					

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	1	DIS-D-00000095	RO. FURUYAMA	NK. NINOMIYA	15. 02. 26

APPROVED	CHECKED	DESIGNED	DRAWN	DATE	DRAWING NO.	PART NO.	CODE NO.
KY. SHIMIZU	NK. NINOMIYA	RO. FURUYAMA	RO. FURUYAMA	14. 07. 31	EDC3-354383-00	MS-180-HRMJ-F6	CL358-0346-7-00