


Aug.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

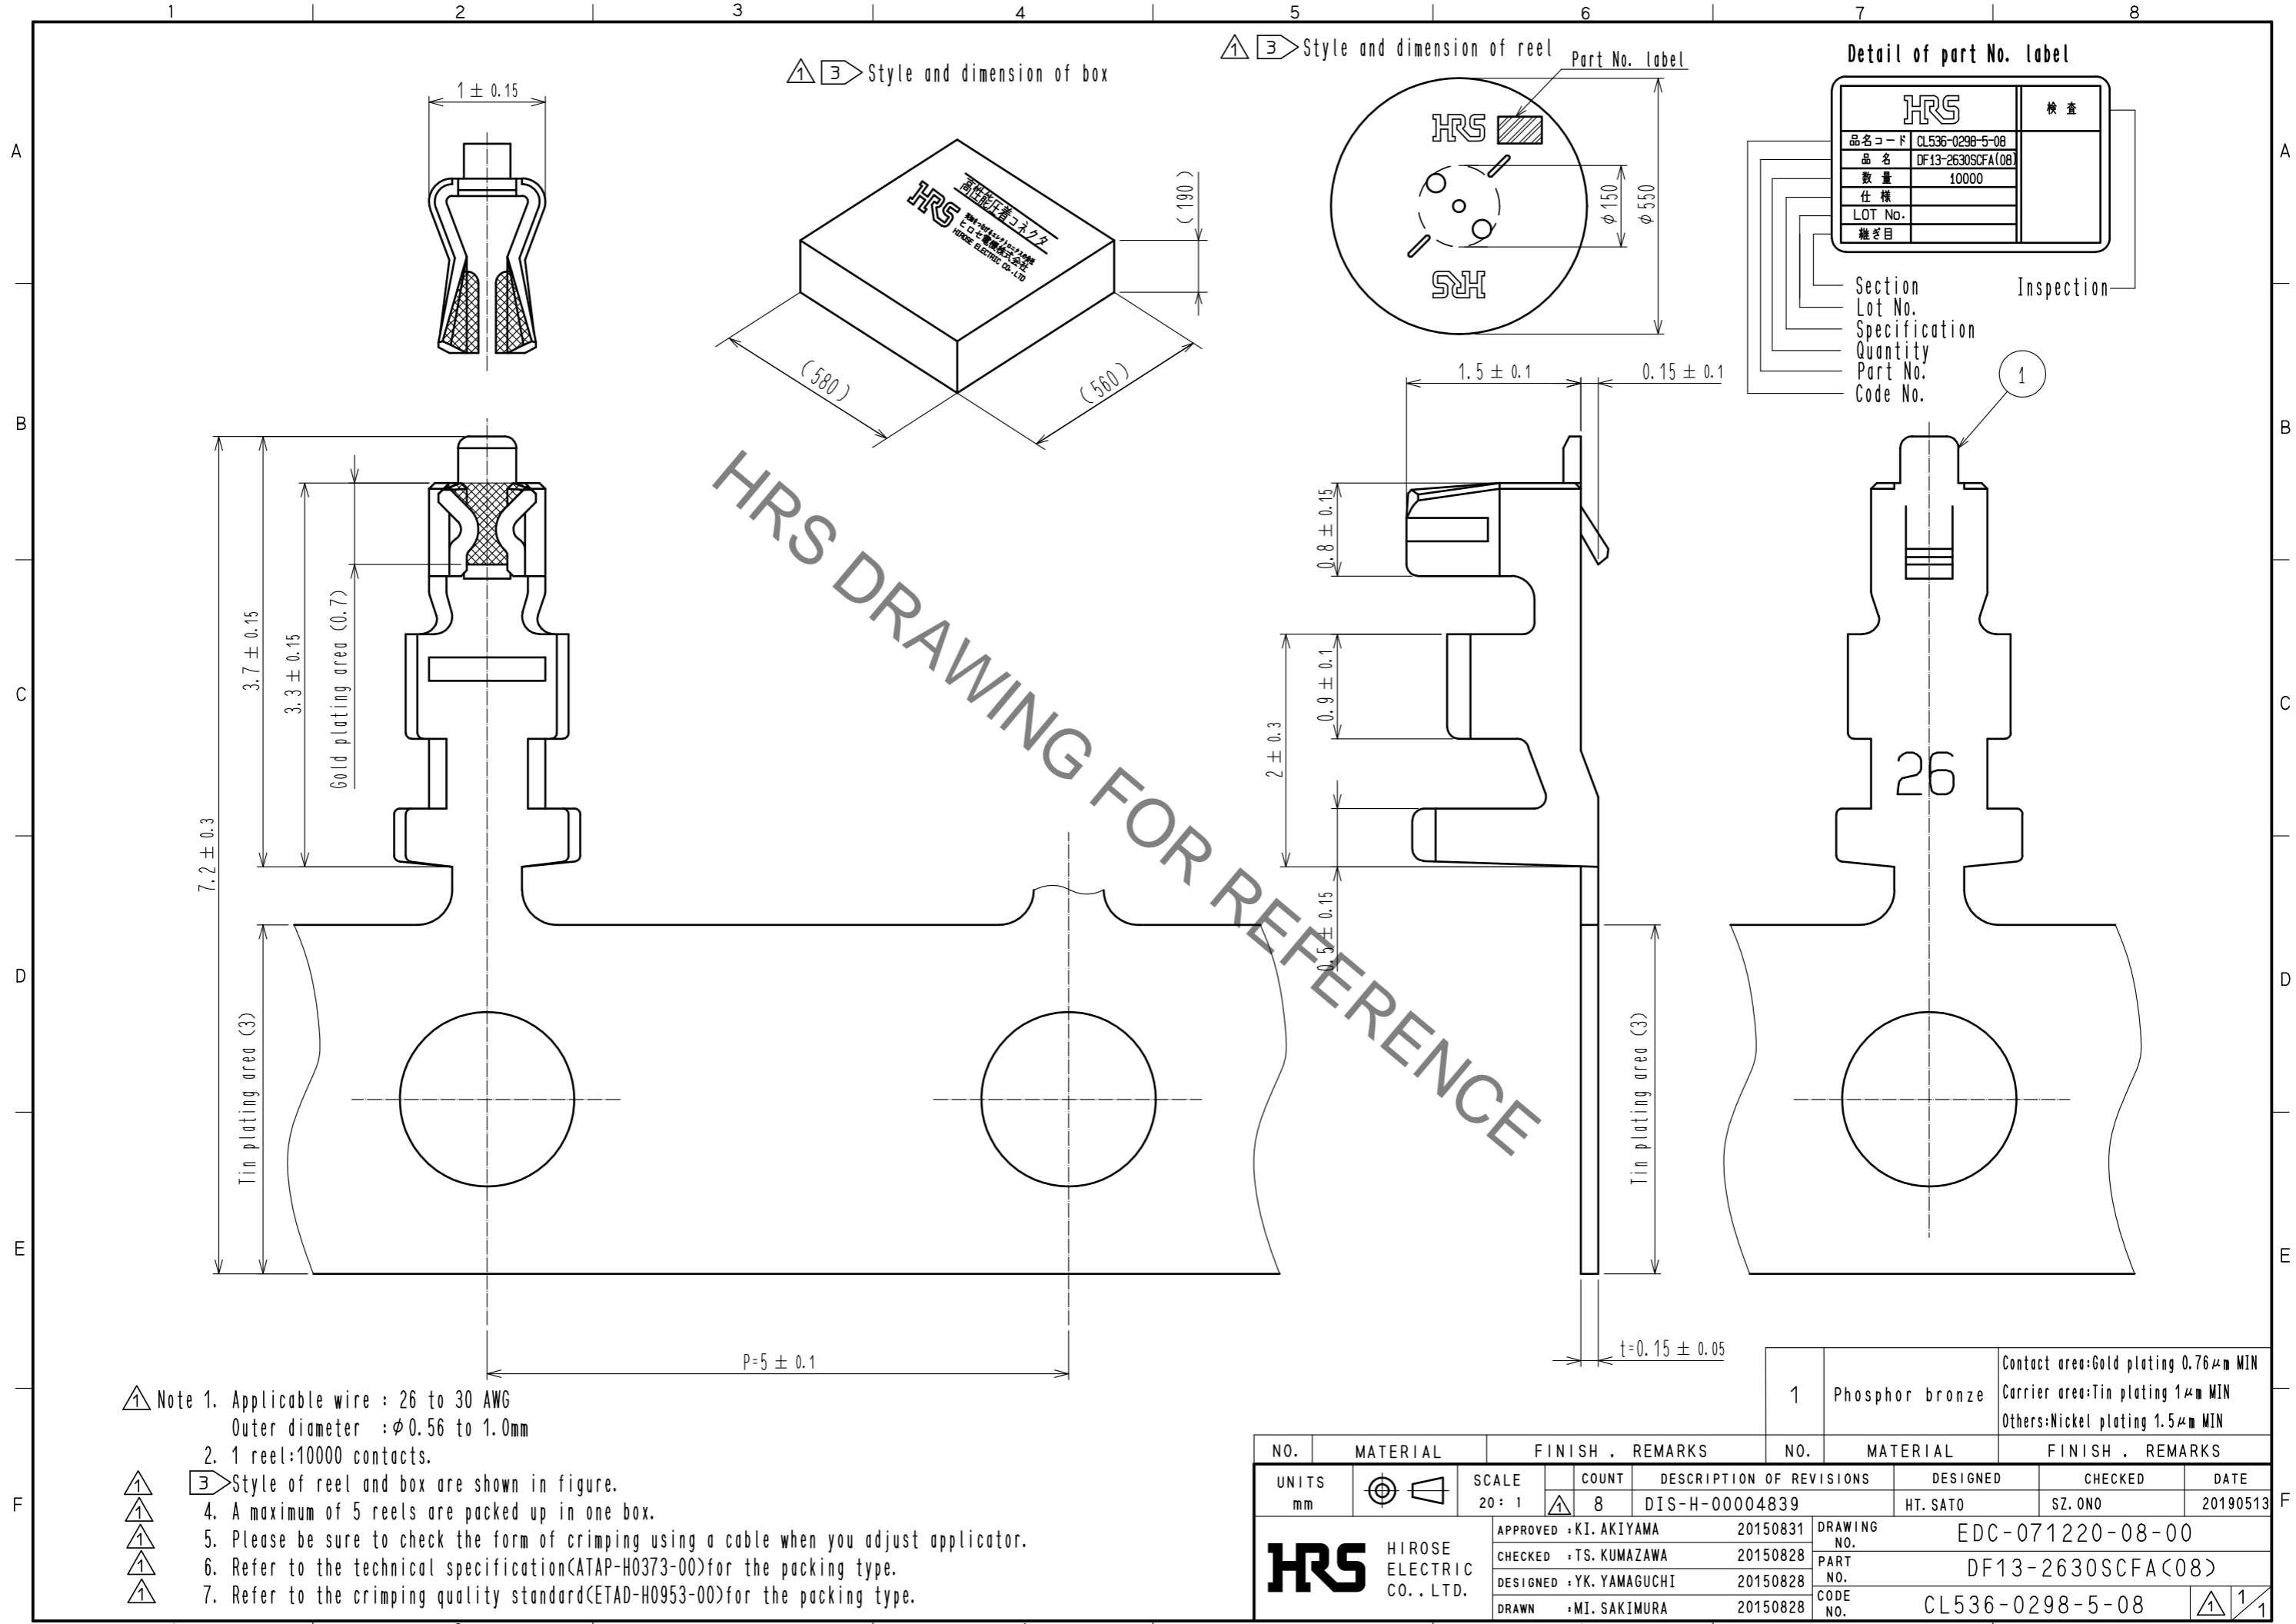

Detail of part No. label

HRS		検査
品名コード	CL536-0298-5-08	
品名	DF13-2630SCFA(08)	
数量	10000	
仕様		
LOT No.		
継ぎ目		

Section
Lot No.
Specification
Quantity
Part No.
Code No.

Inspection

- ① Note 1. Applicable wire : 26 to 30 AWG
Outer diameter : $\phi 0.56$ to 1.0mm
2. 1 reel:10000 contacts.
- ③ Style of reel and box are shown in figure.
- ④ A maximum of 5 reels are packed up in one box.
- ⑤ Please be sure to check the form of crimping using a cable when you adjust applicator.
- ⑥ Refer to the technical specification(ATAP-H0373-00)for the packing type.
- ⑦ Refer to the crimping quality standard(ETAD-H0953-00)for the packing type.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	Phosphor bronze	Contact area:Gold plating 0.76 μm MIN Carrier area:Tin plating 1 μm MIN Others:Nickel plating 1.5 μm MIN			
UNITS mm		SCALE 20: 1	COUNT 8	DESCRIPTION OF REVISIONS DIS-H-00004839	DESIGNED HT. SATO
HRS	HIROSE ELECTRIC CO., LTD.	APPROVED : KI. AKIYAMA 20150831	CHECKED : TS. KUMAZAWA 20150828	DESIGNED : YK. YAMAGUCHI 20150828	DRAWN : MI. SAKIMURA 20150828
				DRAWING NO. EDC-071220-08-00	CHECKED SZ. ONO
				PART NO. DF13-2630SCFA(08)	DATE 20190513
				CODE NO. CL536-0298-5-08	