


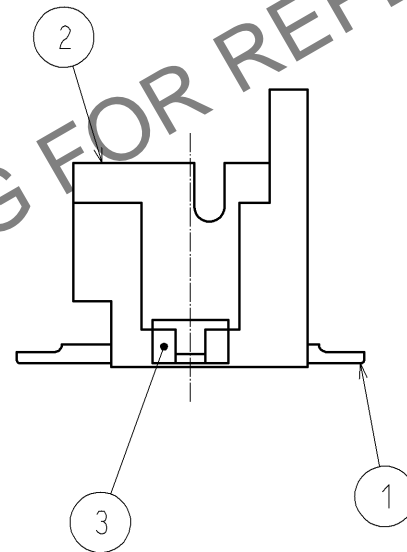
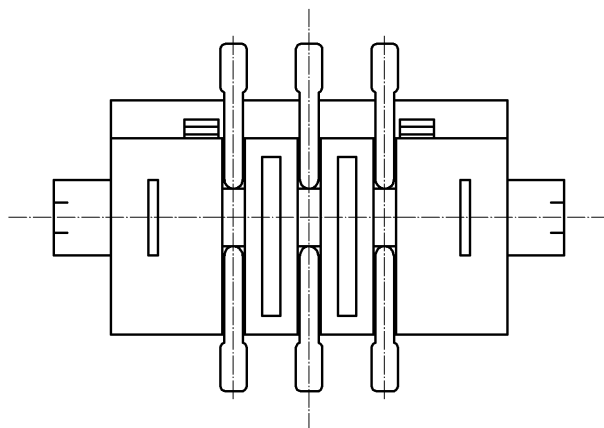


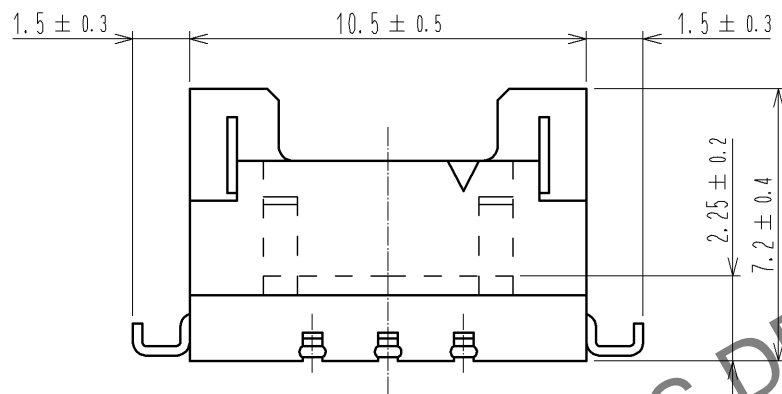

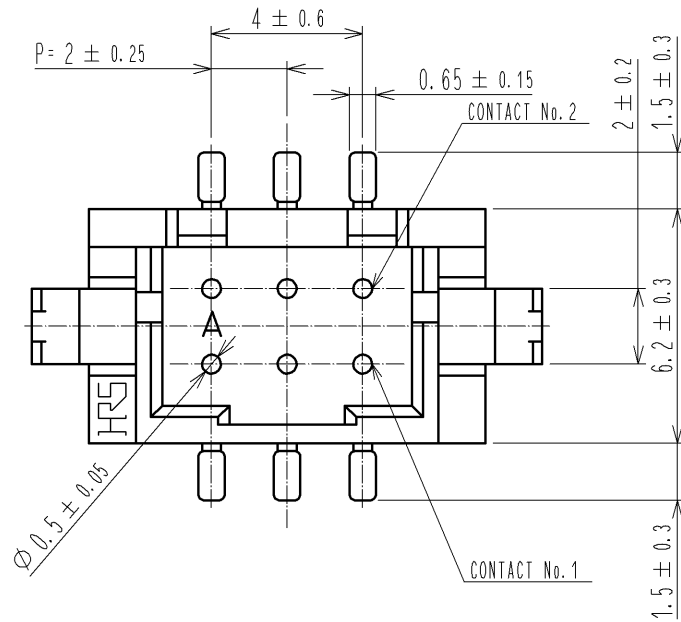

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

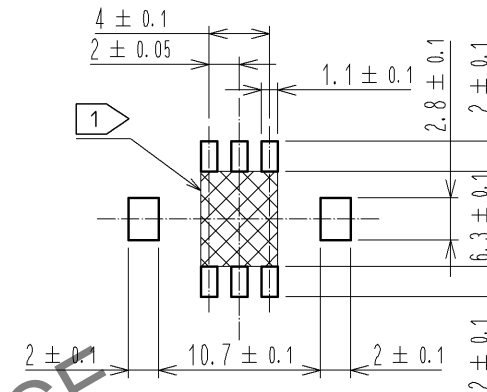

RECOMMENDED PATTERN(2:1)(BOARD THICKNESS  $t=1.6\text{mm}$ )



- NOTES 1 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.  
2. LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.

			6	POLYESTER	CLEAR(COVER TAPE)			
2	POLYAMIDE	BEIGE, UL94V-0	5	A-PET	CLEAR(EMBOSSED CARRIER TAPE)			
1	BRASS	SURFACE:GOLD PLATED 0.2μm min UNDER PLATING:NICKEL PLATED 1μm min	4	POLYAMIDE	CAP. BLACK			
			3	BRASS	TIN PLATED 1μm min			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA		08.10.30	DRAWING NO. EDC3-161190-01			
		CHECKED : TS. KUMAZAWA		08.10.29	PART NO. DF11C-6DP-2V(57)			
		DESIGNED : KT. ISHII		08.10.29	CODE NO. CL543-0683-4-57			
		DRAWN : KT. ISHII		08.10.29	 1/2			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

