




RECOMMENDED LAND PATTERN DIMENSION OF PCB

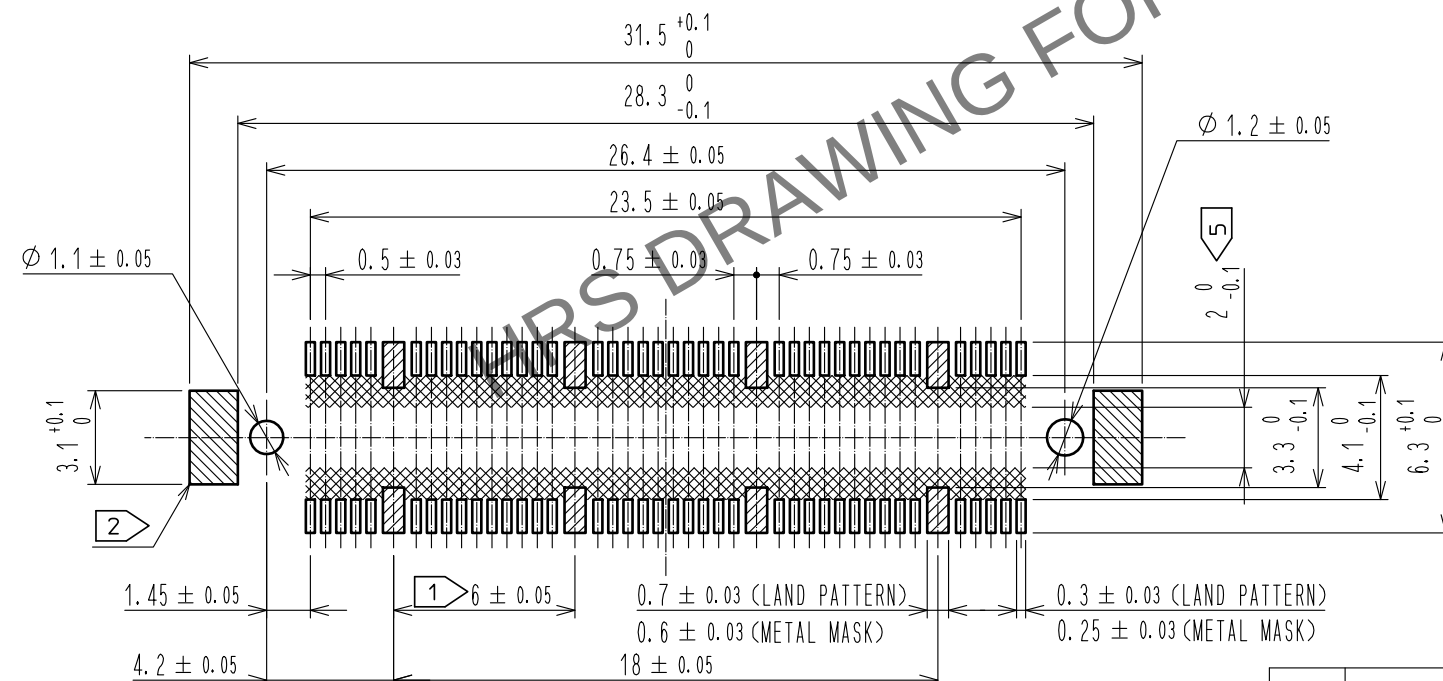

CROSS CUT SECTION - SIGNAL(5:1)

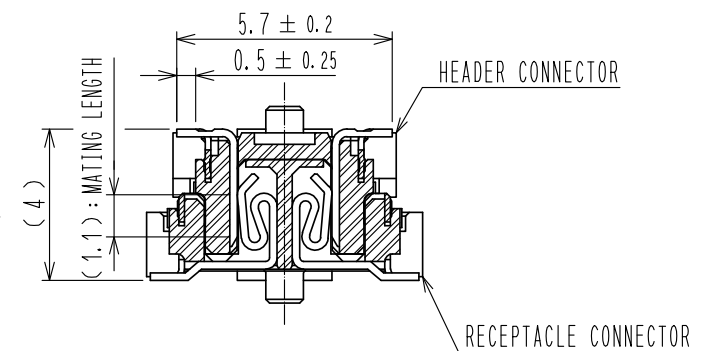

CROSS CUT SECTION - GROUND(5:1)

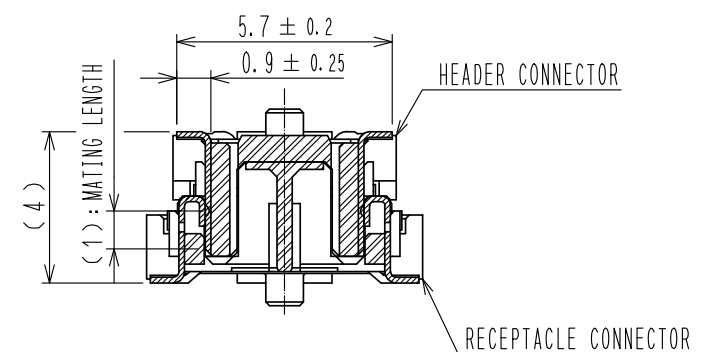

- NOTES
- 1 8 HATCHED  PARTS : GROUND CIRCUIT.
 - 2 2 HATCHED  PARTS : GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY : 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND. OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 6 EMBOSS CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT.
PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.1μm min.		5	POLYESTER	TOP COVER TAPE	
		LEAD AREA :TIN 1μm min.					
		UNDER PLATING:NICKL 1μm min.					
2	PHOSPHOR BRONZE	TIN-PLATING		5	POLYSTYRENE	EMBOSSD CARRIER TAPE	
1	LCP	BEIGE		4	PHOSPHOR BRONZE	TIN-PLATING	
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00015123	DESIGNED SY. KUDO	CHECKED HT. YAMAGUCHI	DATE 20220831
 HIROSE ELECTRIC CO., LTD.	APPROVED :HS. OKAWA		20050926		DRAWING NO. EDC-151944-91-21			
	CHECKED :HS. OZAWA		20050926		PART NO. FX10A-80P/8-SV(91)			
	DESIGNED :TH. NODA		20050902		CODE NO. CL0570-0001-5-91			
	DRAWN :TH. NODA		20050902		 			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

