

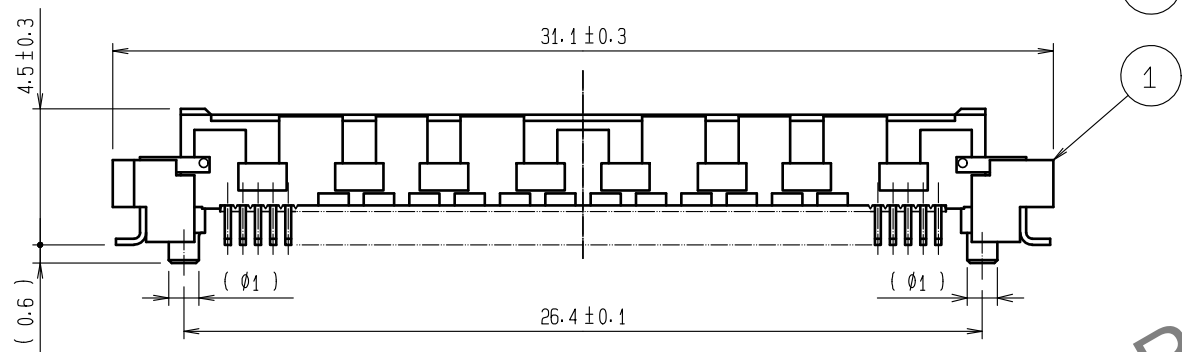


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

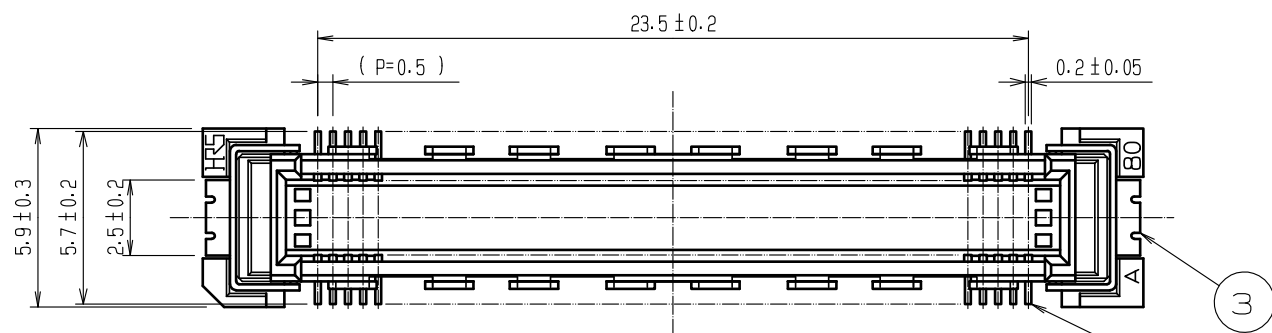


RECOMMENDED LAND PATTERN

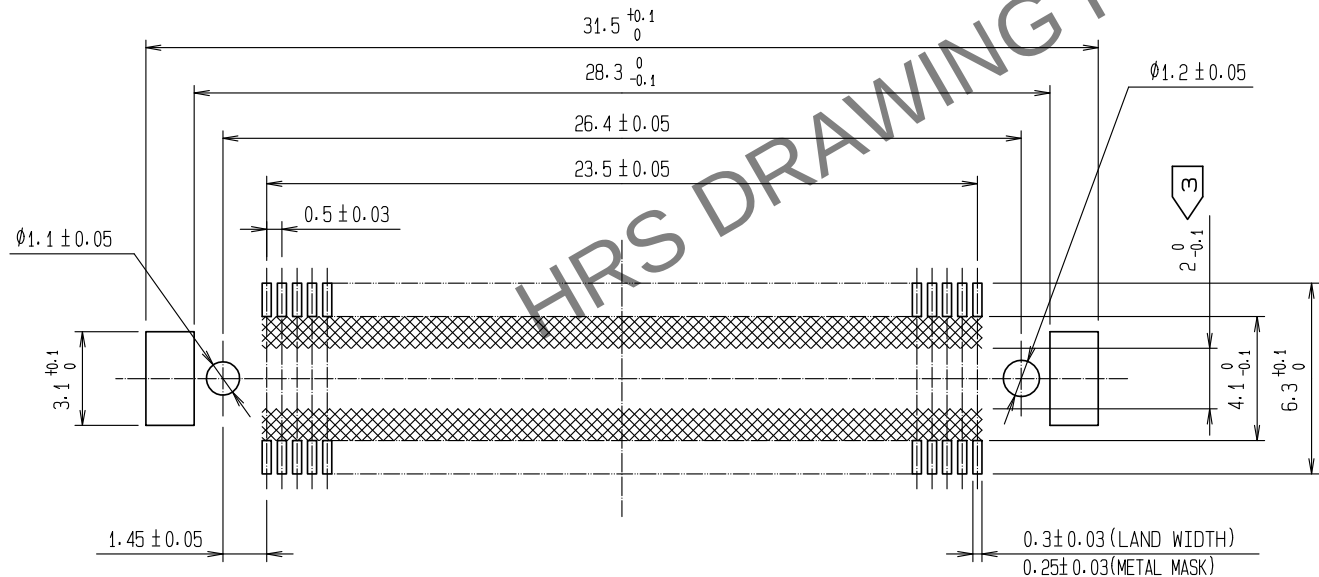


NOTES


- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.
- 3 NO PATTERN SHALL BE DESIGNED IN THIS AREA , TO PREVENT CONTACTS FROM BEING TOUCHED WITH PATTERN.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.



CROSS-CUT SECTION (10:1) ¹

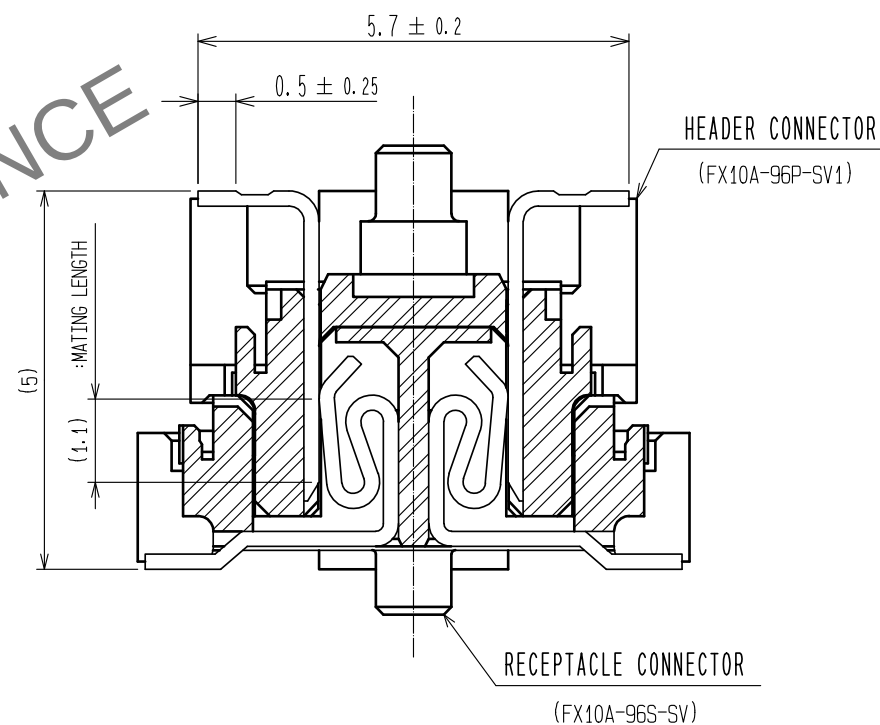

			3		PHOSPHOR BRONZE	TIN-PLATING
			2		PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.
						LEAD AREA : TIN-PLATING 1μm min.
						UNDER PLATING : NICKEL 1μm min.
1	LCP	BEIGE UL94V-0		NO.	MATERIAL	FINISH, REMARKS
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS

UNITS mm		SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00012901	DESIGNED SY. KUDO	CHECKED HT. YAMAGUCHI	DATE 20220218
 HIROSE ELECTRIC CO., LTD.					APPROVED : HS. OKAWA 20060418	DRAWING NO. EDC3-151968-25		
					CHECKED : HS. OZAWA 20060418	PART NO. FX10A-96P-SV1(71)		
					DESIGNED : KT. DOI 20060417	CODE NO. CL0570-0141-4-71		
					DRAWN : KT. DOI 20060417			

HRS

HIROSE
ELECTRIC
CO., LTD.