


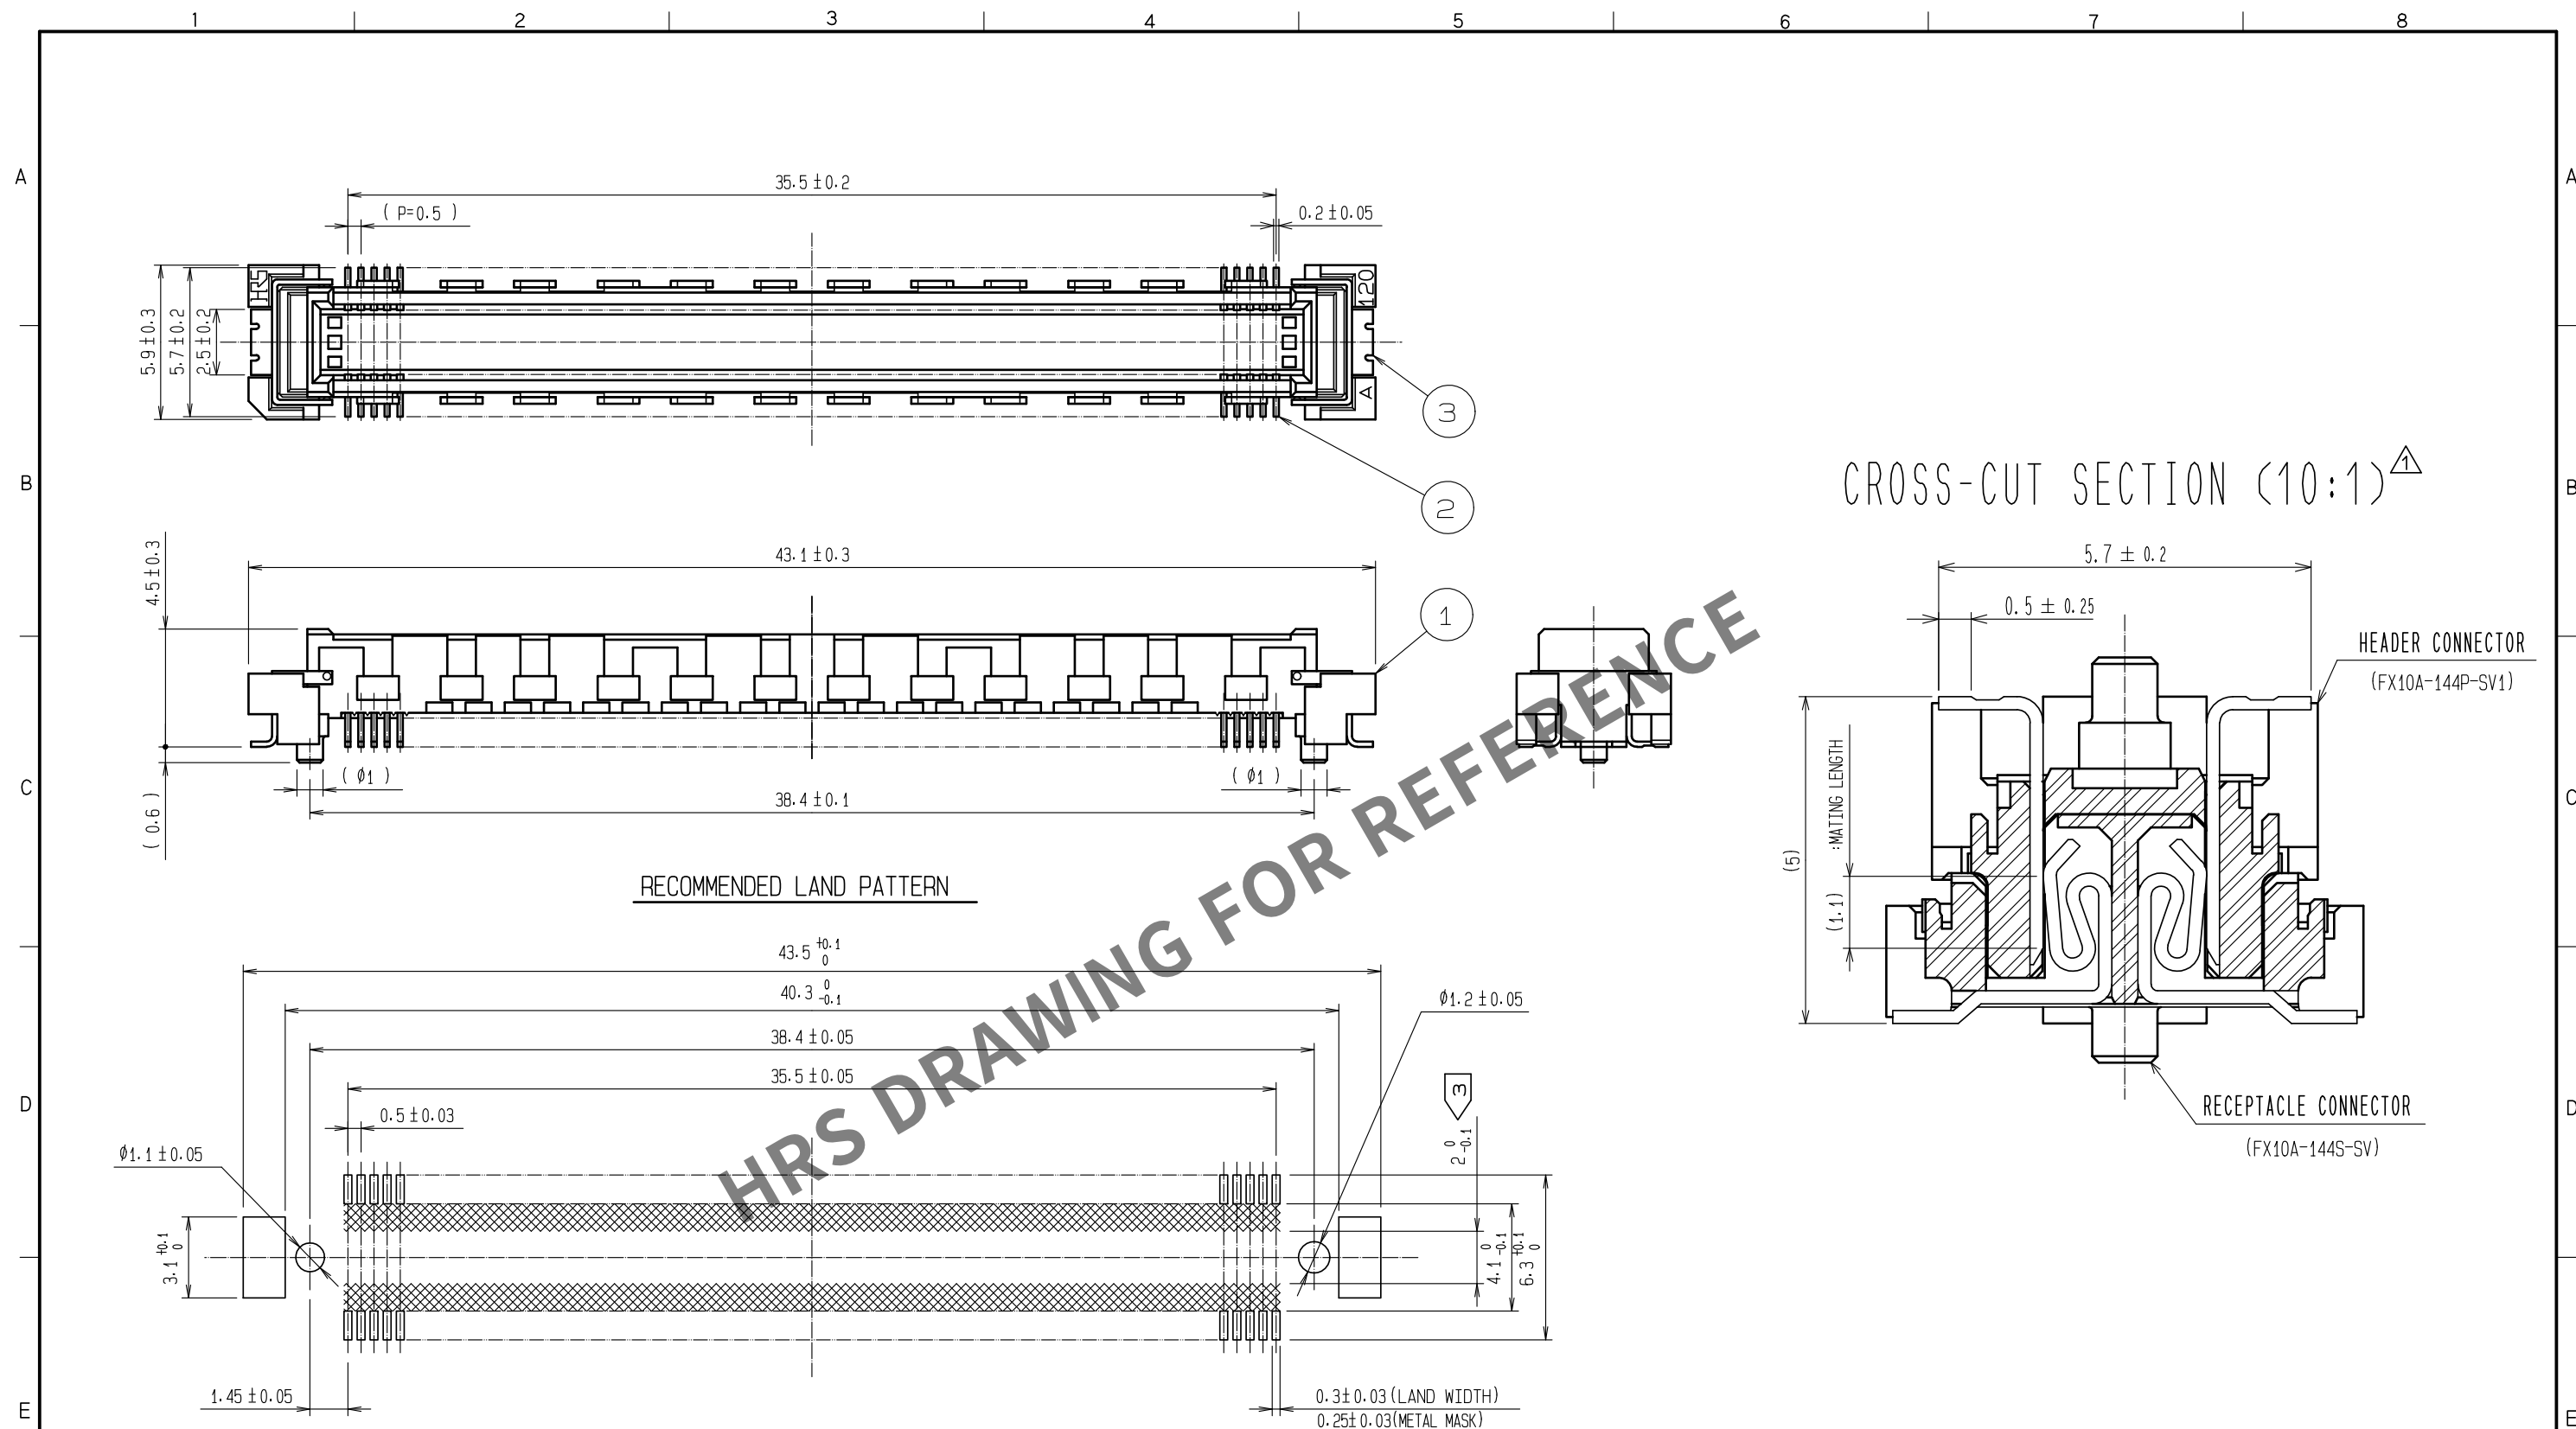

NOTES

- 1 SMT LEAD-COPLANARITY:0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.
3 NO PATTERN SHALL BE DESIGNED IN THIS AREA , TO PREVENT CONTACTS FROM BEING TOUCHED WITH PATTERN.
4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

		3		PHOSPHOR BRONZE		TIN-PLATING	
		2		PHOSPHOR BRONZE		CONTACT AREA : GOLD 0.1μm min.	
						LEAD AREA : TIN-PLATING 1μm min.	
						UNDER PLATING : NICKEL 1μm min.	
1	LCP	BEIGE		UL94V-0			
NO.	MATERIAL	FINISH.		REMARKS		NO.	MATERIAL
		FINISH.		REMARKS			
UNITS mm		SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00012901		DESIGNED SY. KUDO
						CHECKED HT. YAMAGUCHI	DATE 20220218
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		2060418		DRAWING NO. EDC3-151970-25	
		CHECKED : HS. OZAWA		2060418		PART NO. FX10A-144P-SV1(71)	
		DESIGNED : KT. DOI		2060417		CODE NO. CL0570-0143-0-71	
		DRAWN : KT. DOI		2060417		 	