


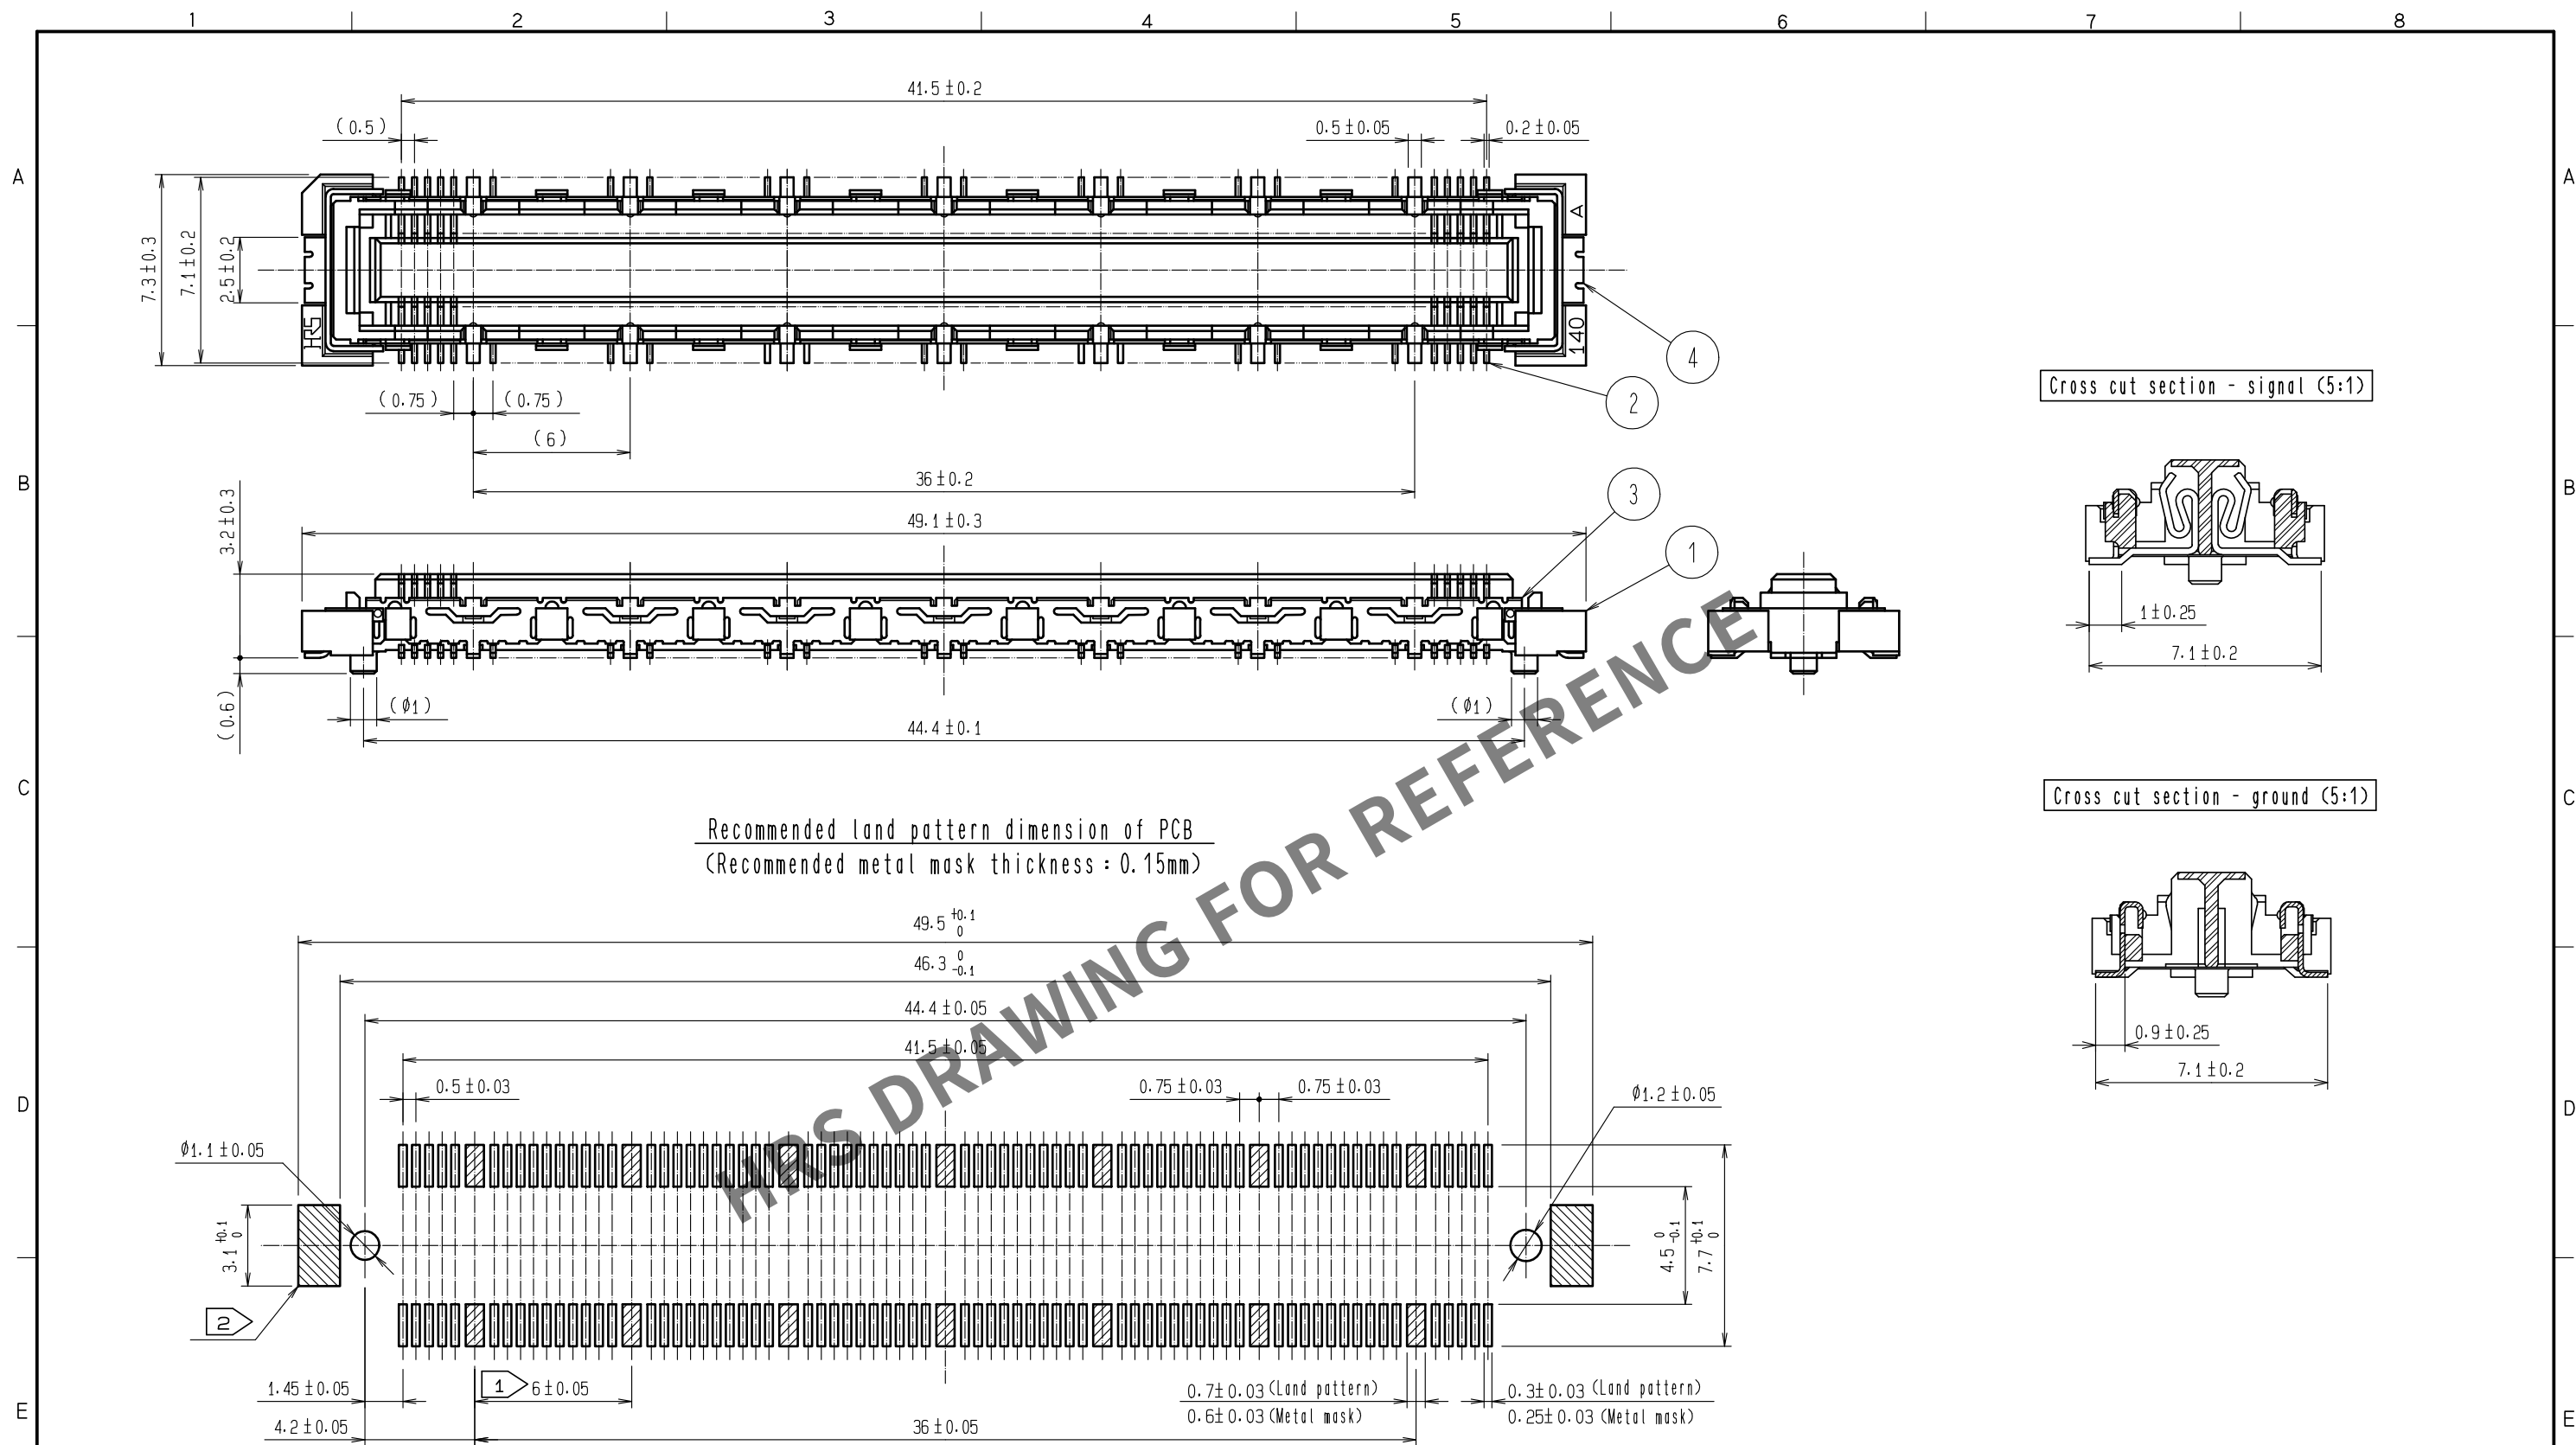





- Notes
- 1 14 hatched  parts : ground circuit.
 - 2 2 hatched  parts : ground circuit.
 - 3 SMT lead - coplanarity : 0.1 max.
 - 4 This product has no polarity to pattern for mounting.
 - 5 Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details.
 - 6 The dimensions in parentheses are for reference.

2	Phosphor blonze	Contact area : Gold 0.1 μ m min	6	Polyester	(Top cover tape)
		Lead area : Gold 0.05 μ m min	5	Polyethylene	(Emboss carrier tape)
		Under plating : Nickel 1 μ m min	4	Phosphor blonze	Tin - plating
1	LCP	Beige UL94V-0	3	Phosphor blonze	Tin - plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS


UNITS mm		SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007
 HIROSE ELECTRIC CO., LTD.		APPROVED	+ HS. OKAWA		20080220	DRAWING NO. EDC3-151979-21		
		CHECKED	+ HS. OZAWA		20080220	PART NO. FX10A-140S/14-SV(91)		
		DESIGNED	+ SY. KAMIGA		20080220	CODE NO. CL0570-0204-2-91		
		DRAWN	+ HK. SUNADORI		20080219	 		

Drawing for packing (2:1)

Reeled dimension (Free)

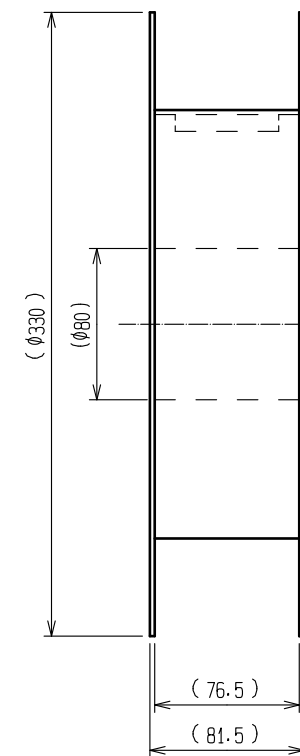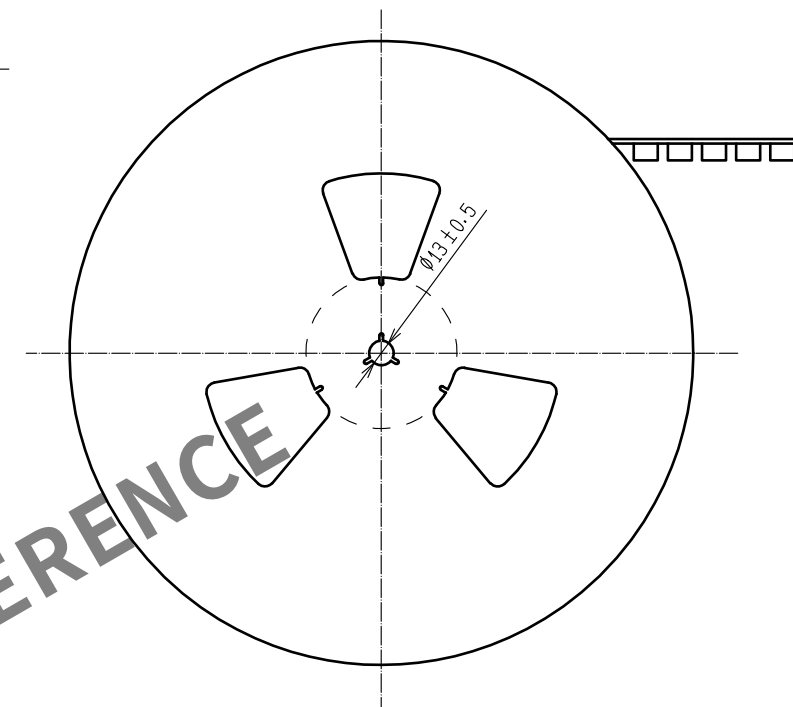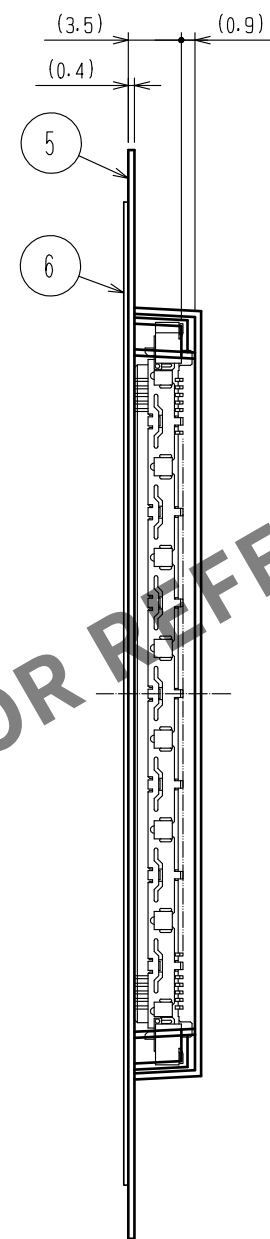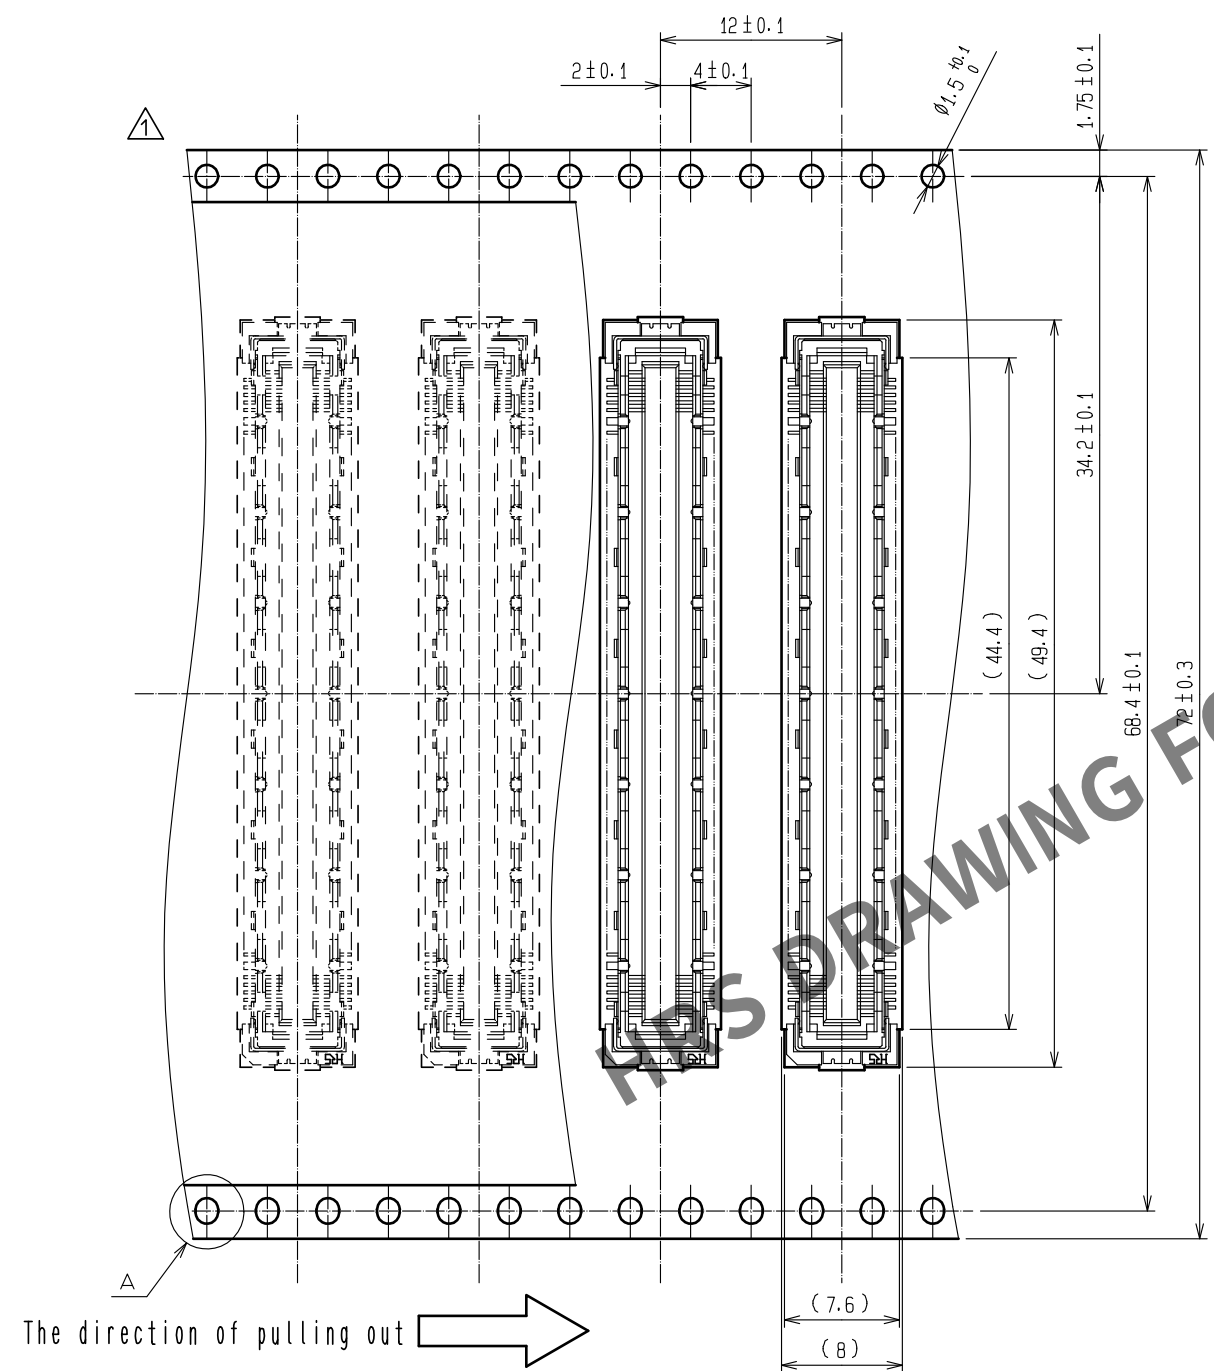

A (5:1)



- Notes
- 7 1 reel : 1,000 connectors.
 - 8 Minimum 10 compartments from both reel ends remain empty.
 - 9 This product has no polavity to tape and reel packaging.
 - 10 The dimensions in parentheses are for reference.

HRS

DRAWING NO.	EDC3-151979-21
PART NO.	FX10A-140S/14-SV(91)
CODE NO.	CL0570-0204-2-91

1/2