


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




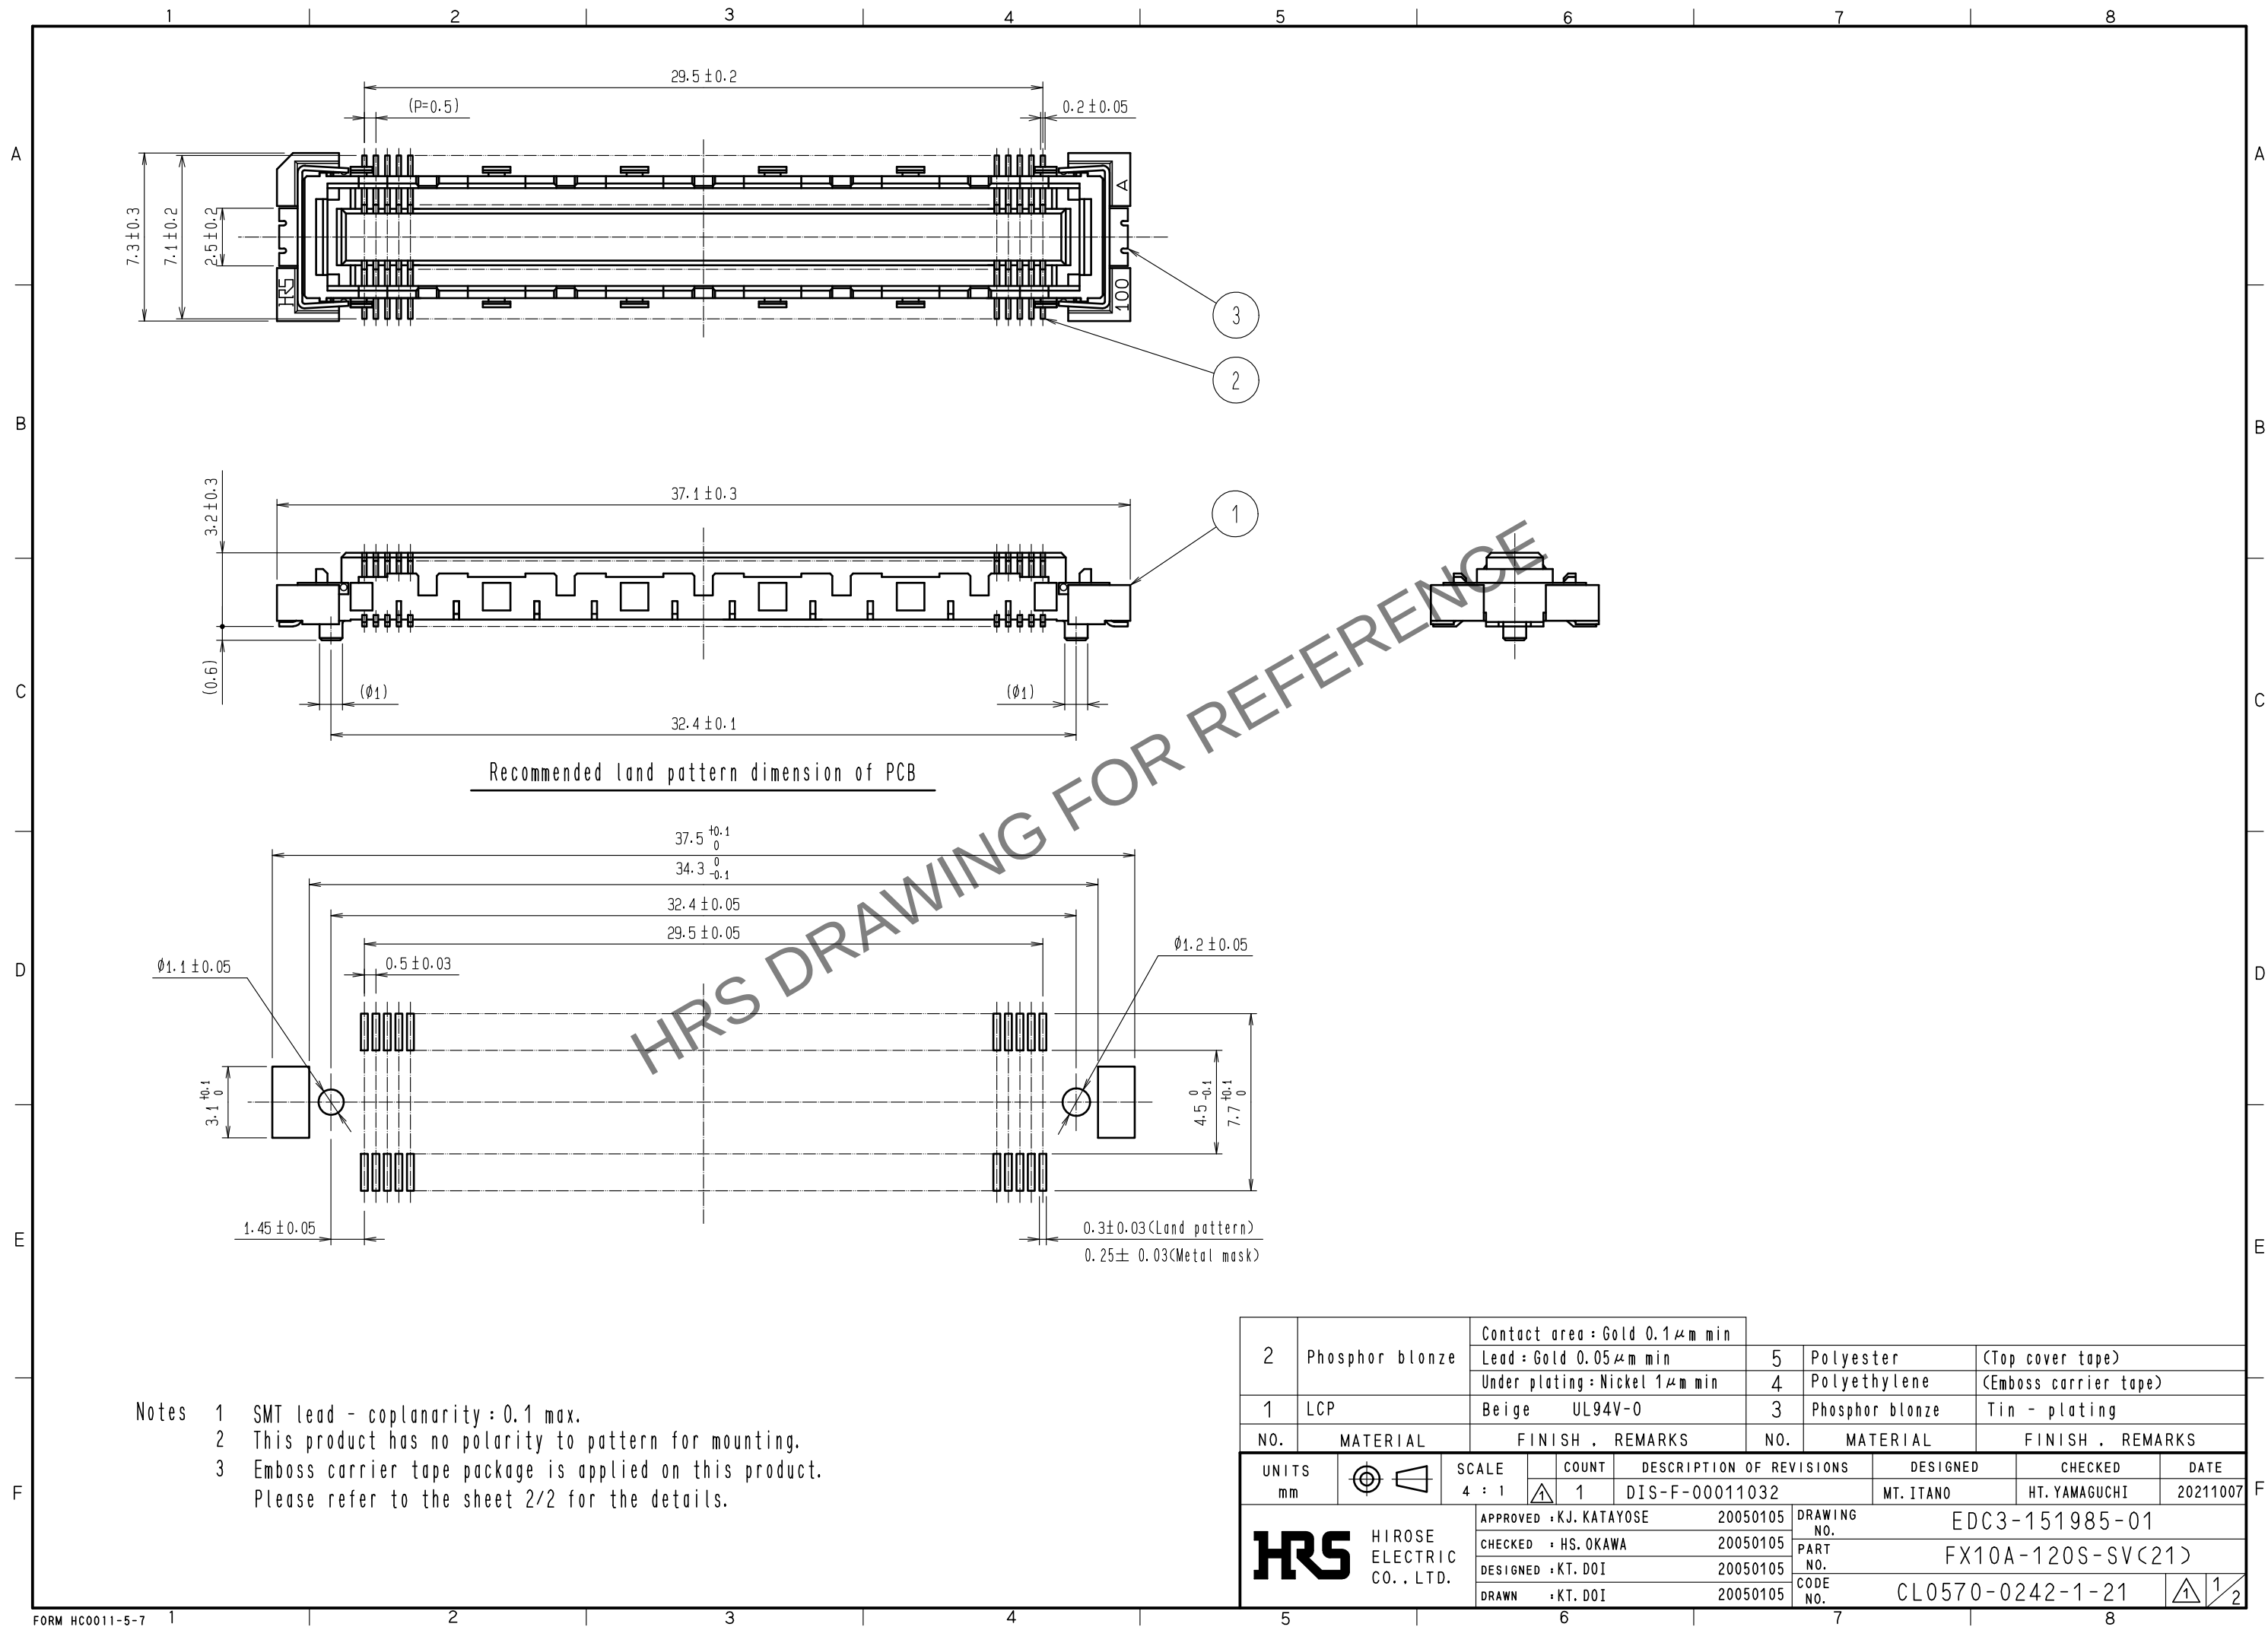


- Notes
- 1 SMT lead - coplanarity : 0.1 max.
 - 2 This product has no polarity to pattern for mounting.
 - 3 Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details.

2	Phosphor blonze	Contact area : Gold 0.1 μ m min	5	Polyester	(Top cover tape)
		Lead : Gold 0.05 μ m min		Polyethylene	(Emboss carrier tape)
		Under plating : Nickel 1 μ m min		Phosphor blonze	Tin - plating
1	LCP	Beige UL94V-0	3		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	
HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KATAYOSE	20050105	DRAWING NO.	EDC3-151985-01
		CHECKED : HS. OKAWA	20050105	PART NO.	FX10A-120S-SV(21)
		DESIGNED : KT. DOI	20050105	CODE NO.	CL0570-0242-1-21
		DRAWN : KT. DOI	20050105		
		DESIGNED	MT. ITANO	CHECKED	HT. YAMAGUCHI
		DATE	20211007		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (2:1)

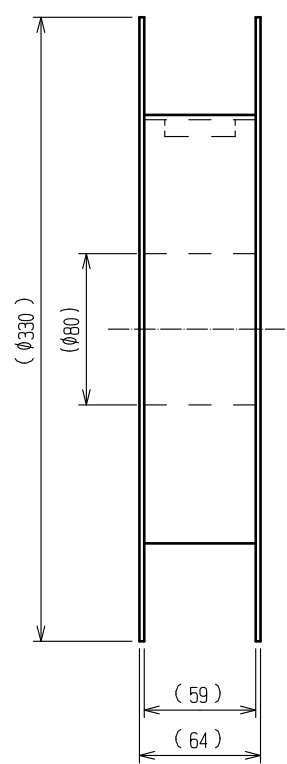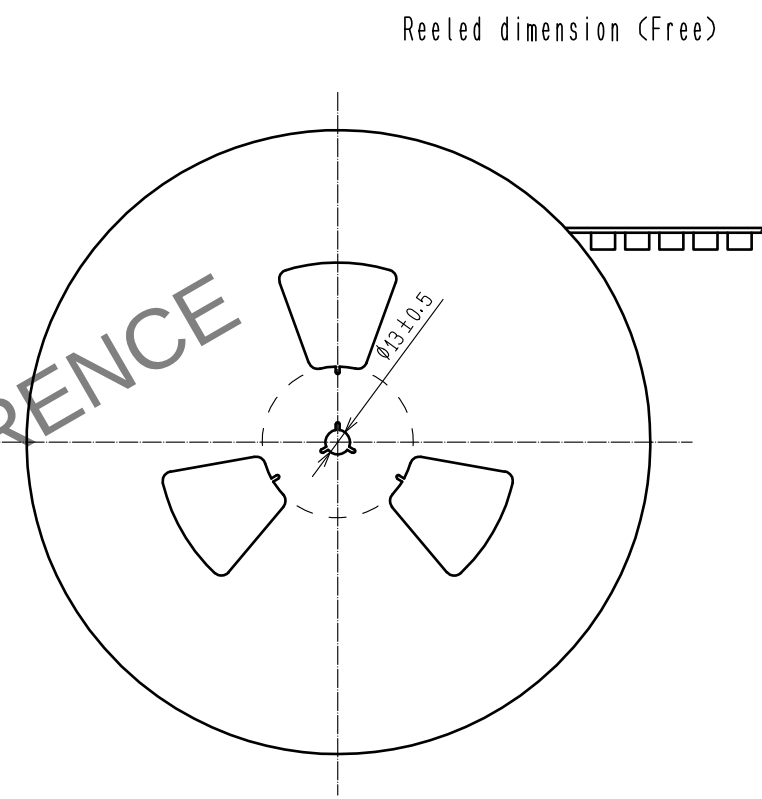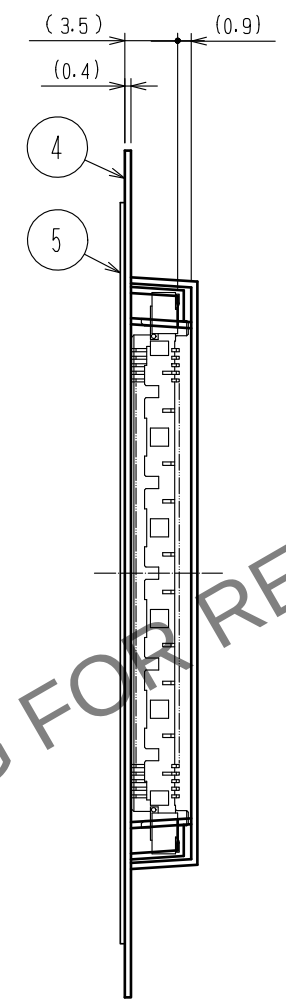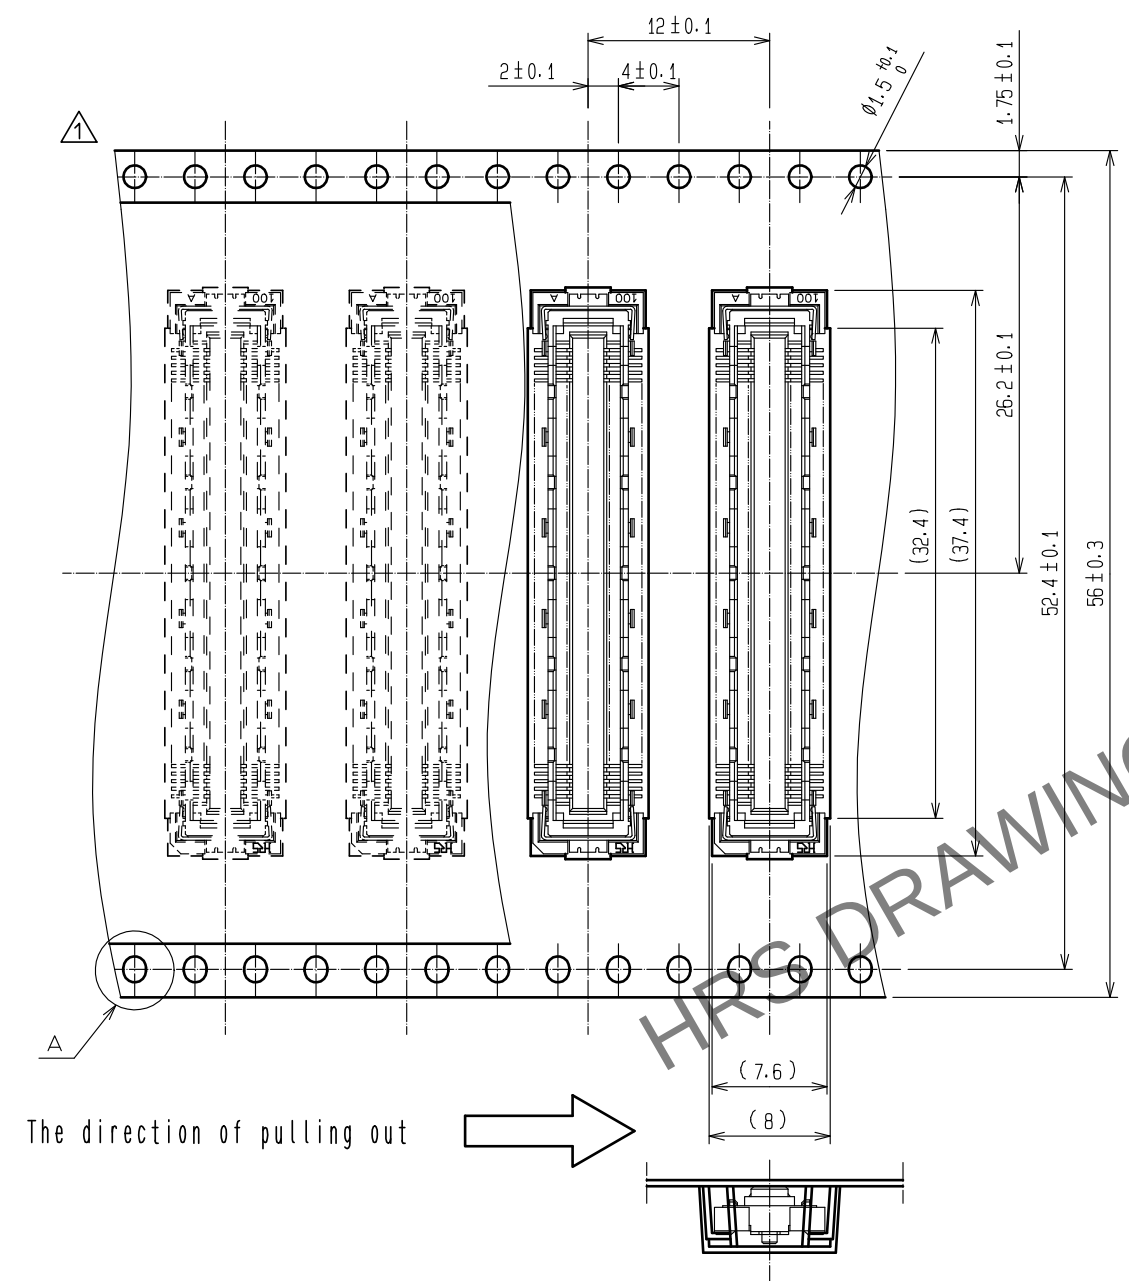

- Notes
- 4 1 reel : 1,000 connectors.
 - 5 Minimum 10 compartments from both reel ends remain empty.
 - 6 This product has no polarity to tape and reel packaging.
 - 7 The dimensions in parentheses are for reference.

HRS	DRAWING NO.	EDC3-151985-01
	PART NO.	FX10A-120S-SV(21)
	CODE NO.	CL0570-0242-1-21