



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

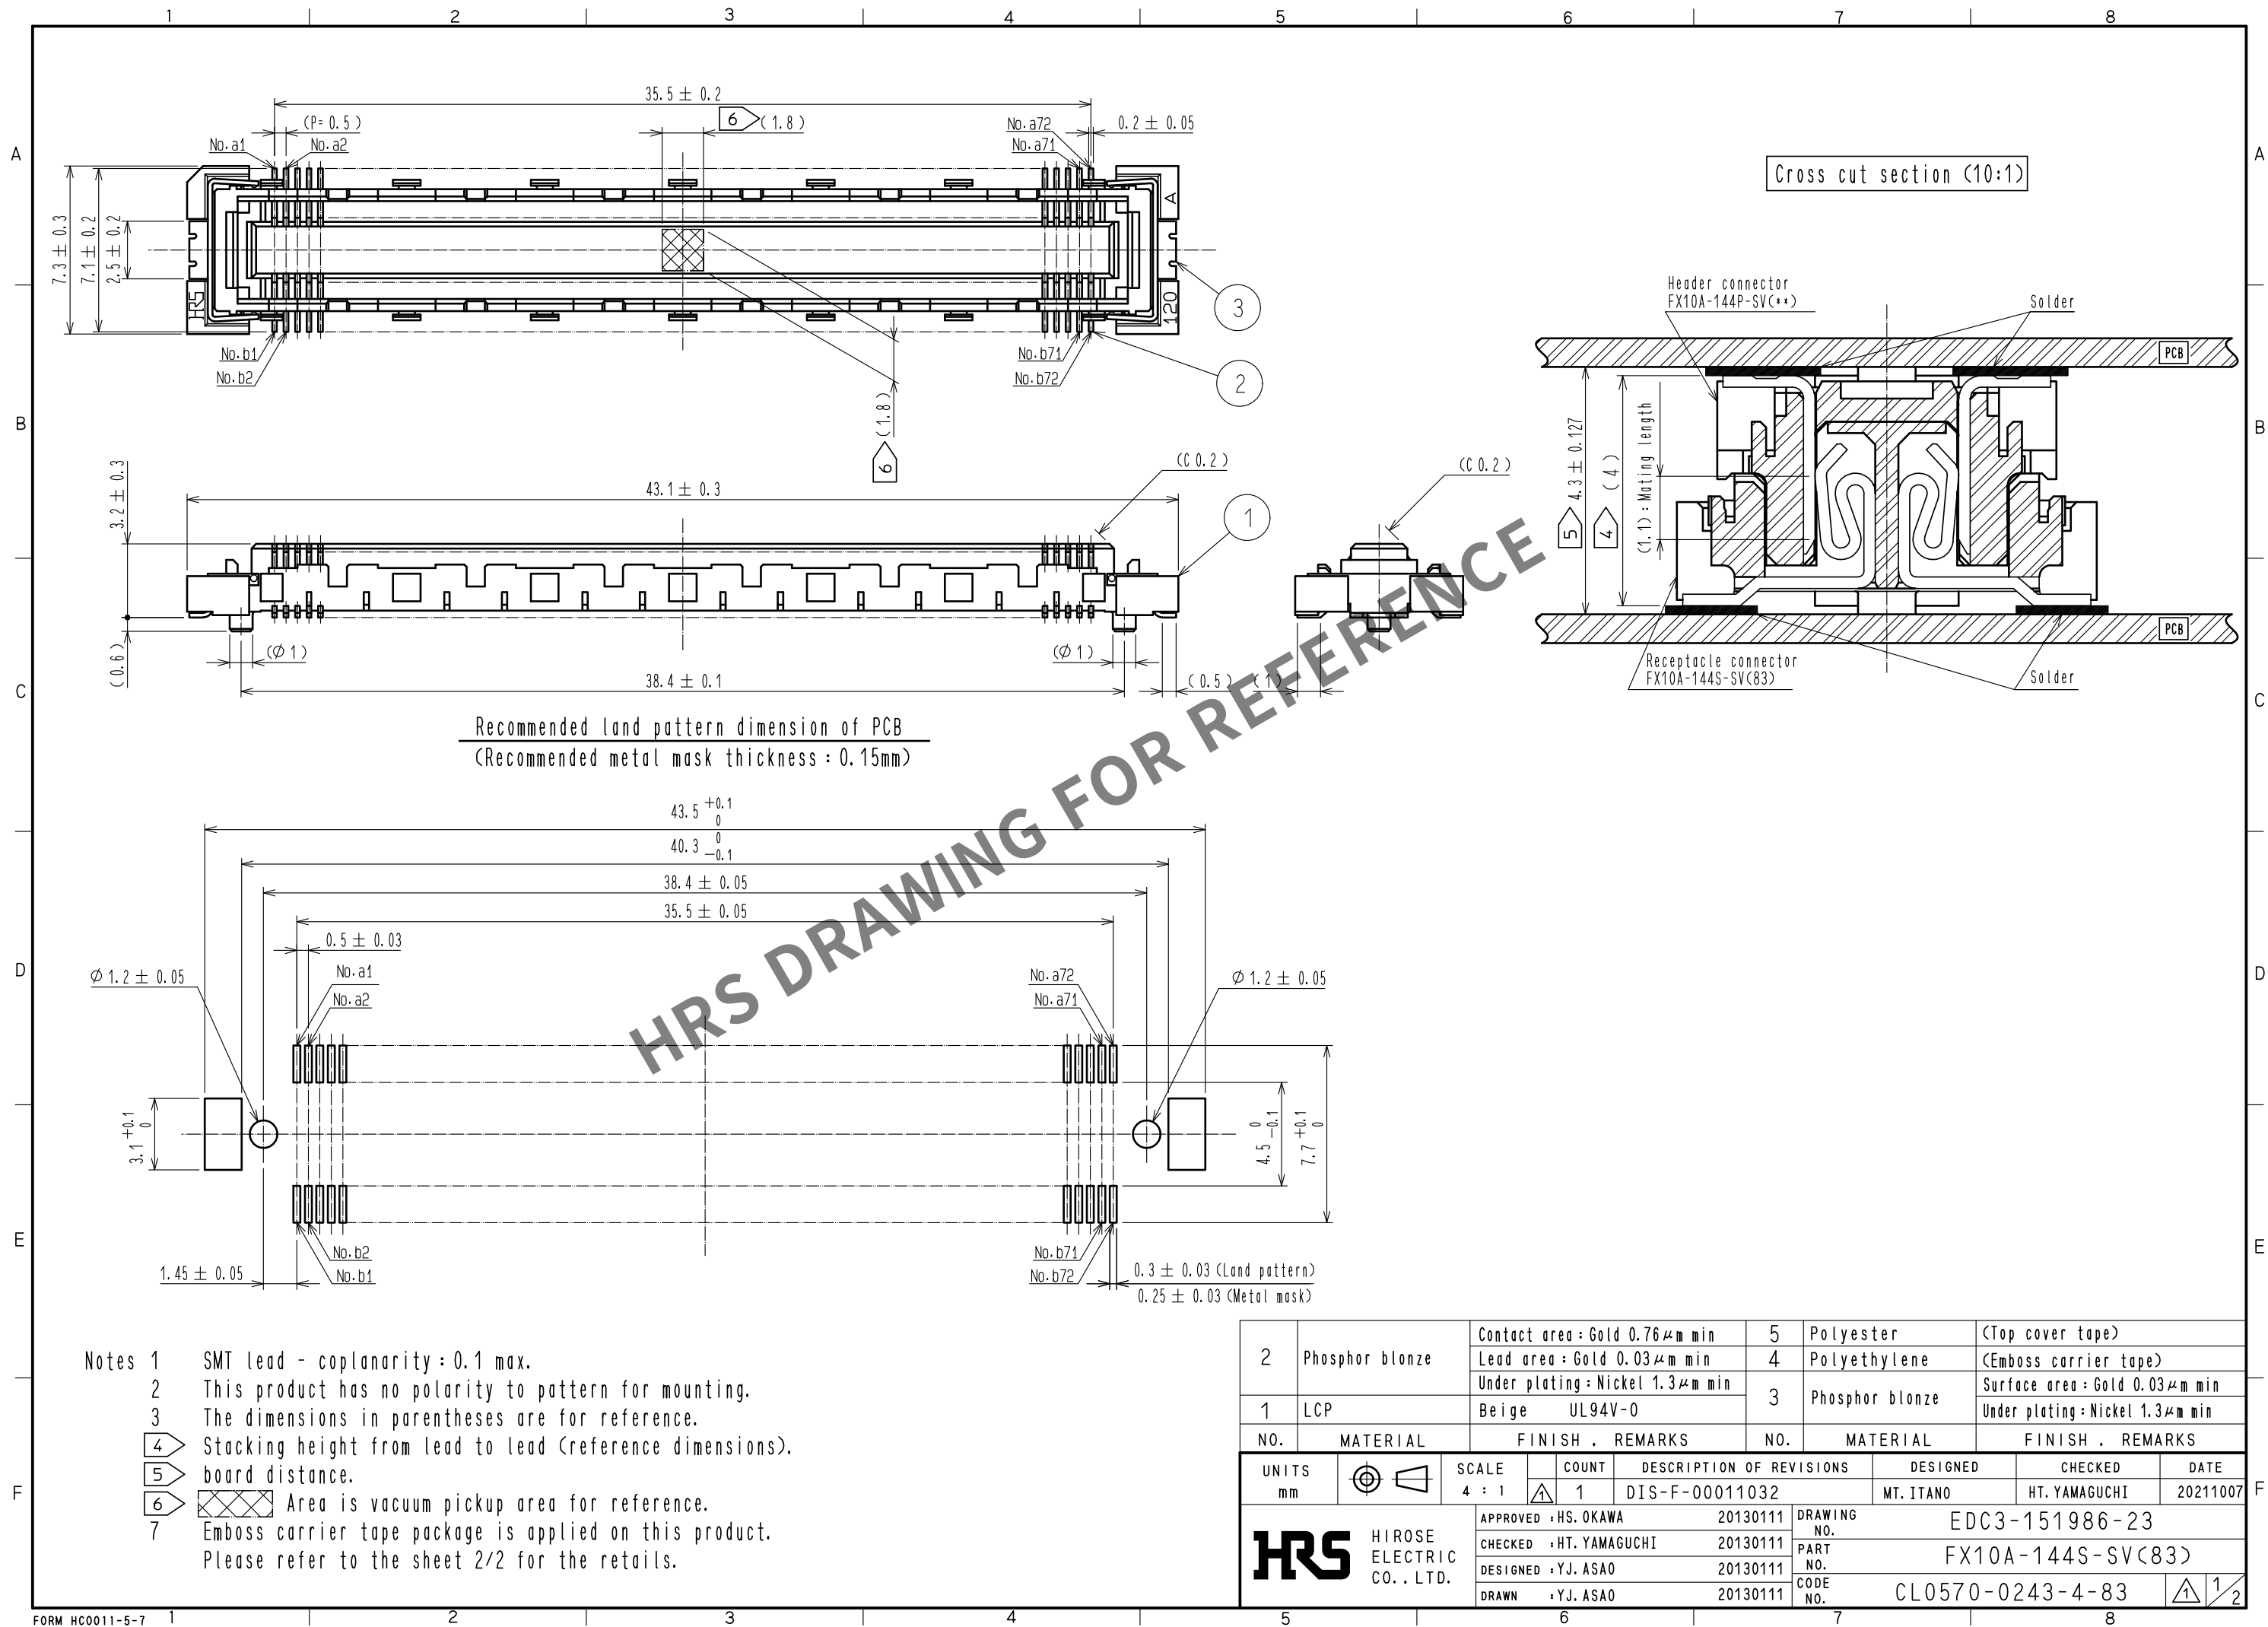

2	Phosphor blonze	Contact area : Gold 0.76μm min		5	Polyester	(Top cover tape)	
		Lead area : Gold 0.03μm min		4	Polyethylene	(Emboss carrier tape)	
		Under plating : Nickel 1.3μm min		3	Phosphor blonze	Surface area : Gold 0.03μm min	
1	LCP	Beige UL94V-0				Under plating : Nickel 1.3μm min	
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS



UNITS mm		SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007
 HIROSE ELECTRIC CO. , LTD.		APPROVED : HS. OKAWA		20130111	DRAWING NO.	EDC3-151986-23		
		CHECKED : HT. YAMAGUCHI		20130111	PART NO.	FX10A-144S-SV(83)		
		DESIGNED : YJ. ASAO		20130111	CODE NO.	CL0570-0243-4-83		
		DRAWN : YJ. ASAO		20130111	 1/2			

Drawing for packing (2:1)


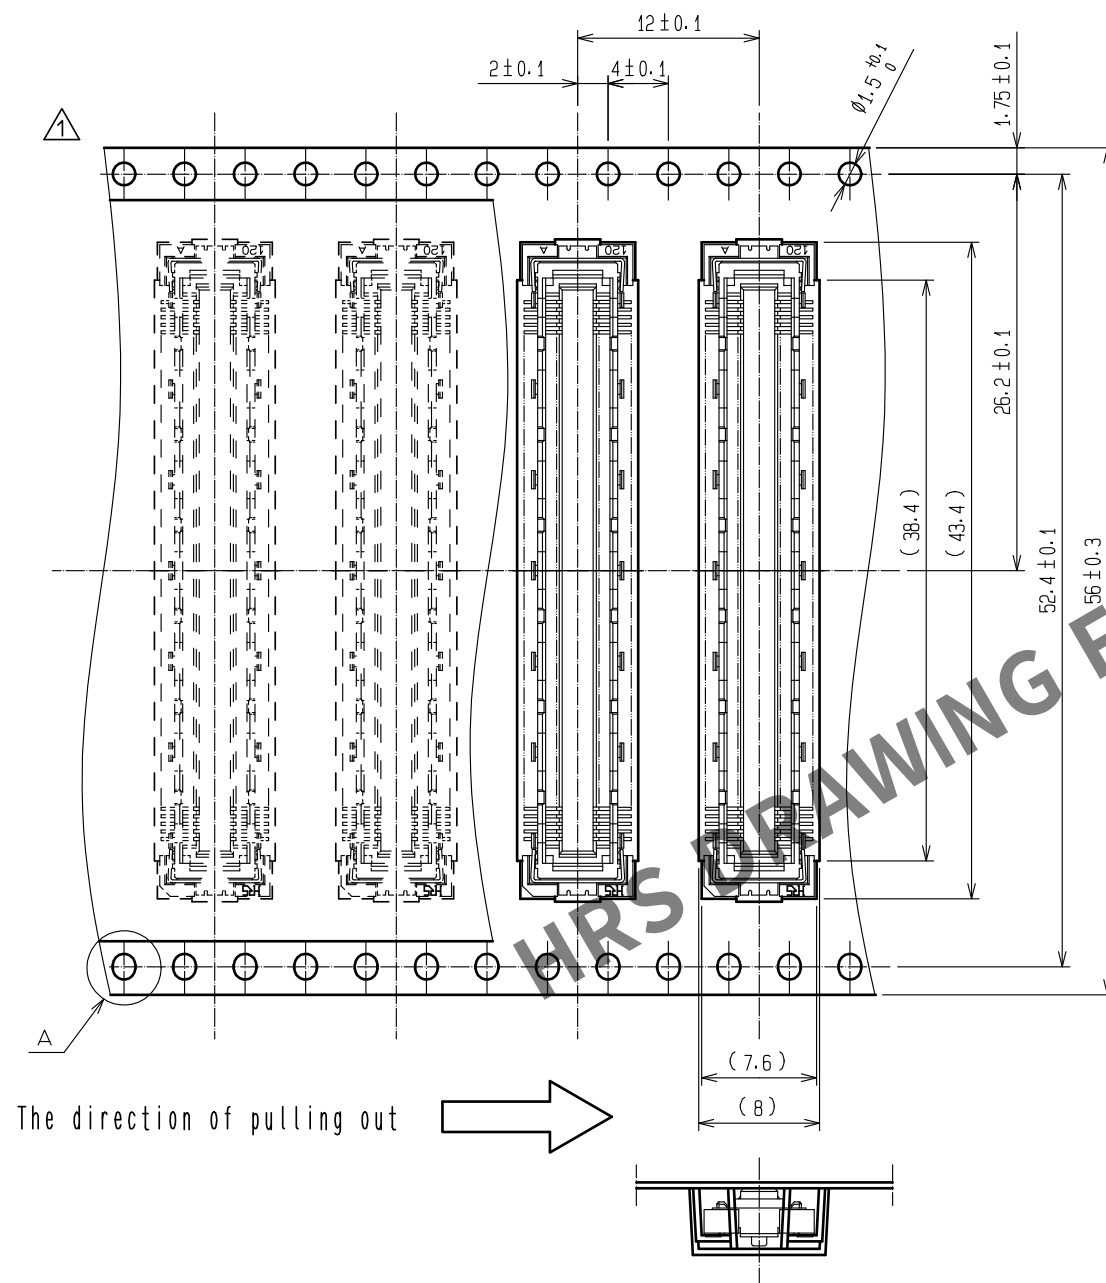


The direction of pulling out

A (5:1)

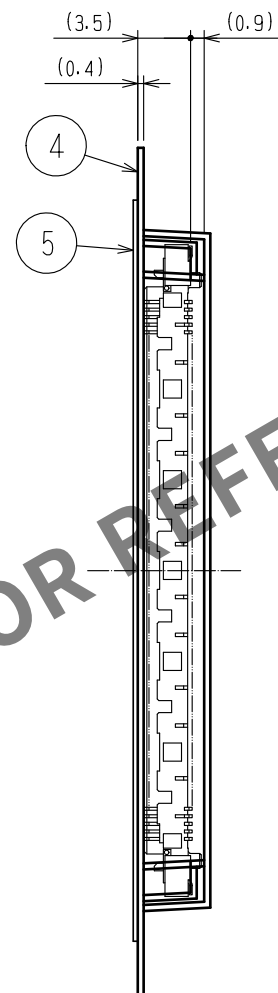

Reeled dimension (Free)

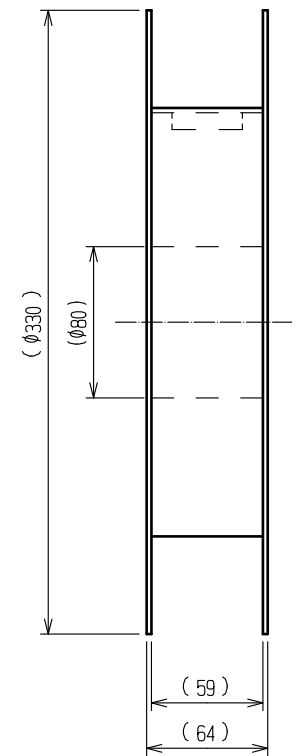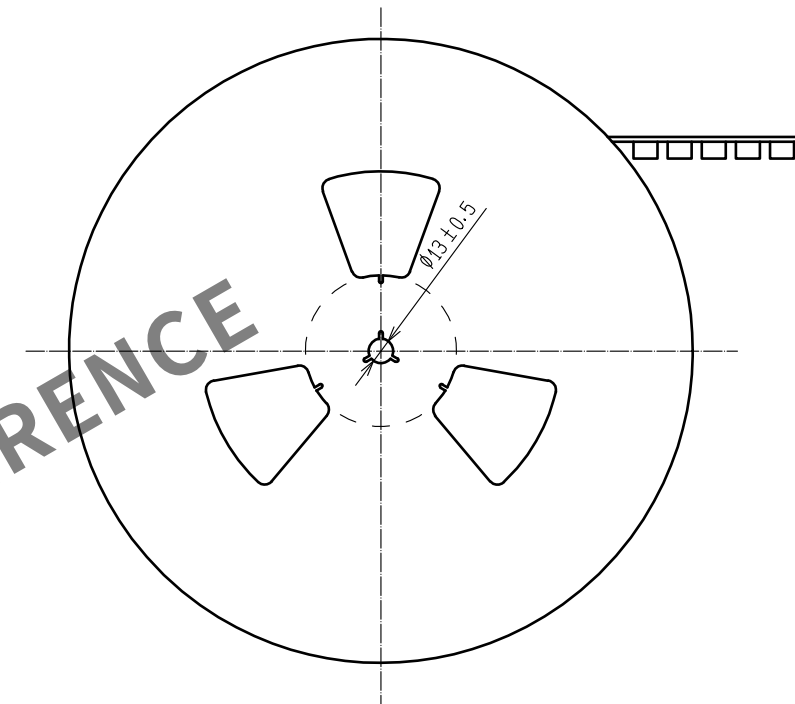

- Notes
- 8 1 reel : 1,000 connectors.
 - 9 Minimum 10 compartments from both reel ends remain empty.
 - 10 This product has no polarity to tape and reel packaging.
 - 11 The dimensions in parentheses are for reference.

HRS

DRAWING NO.	EDC3-151986-23
PART NO.	FX10A-144S-SV(83)
CODE NO.	CL0570-0243-4-83

1/2