

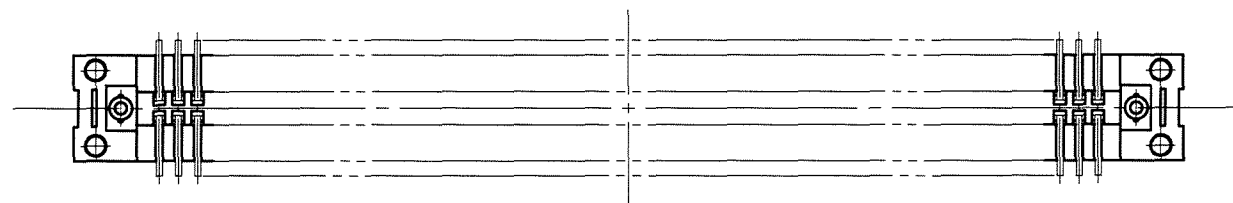
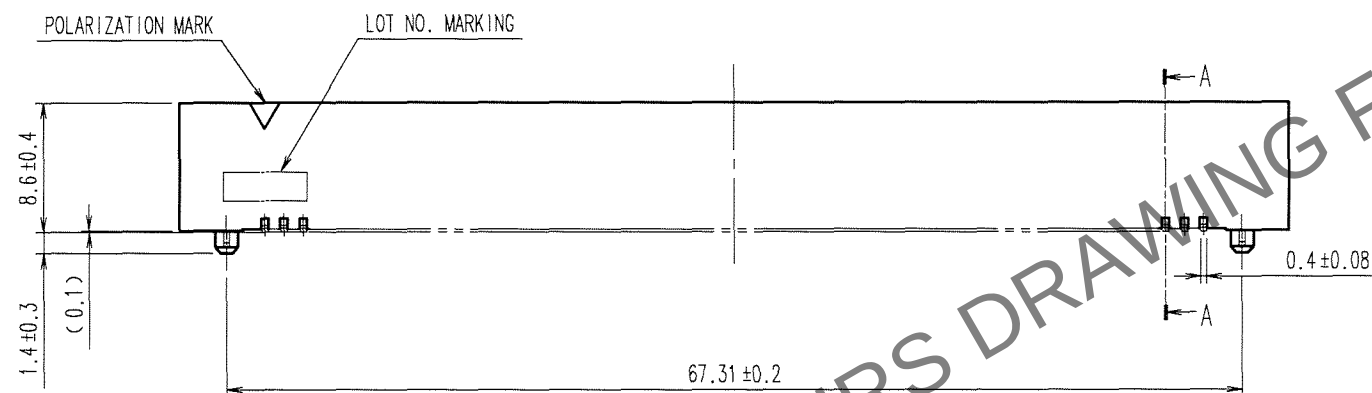
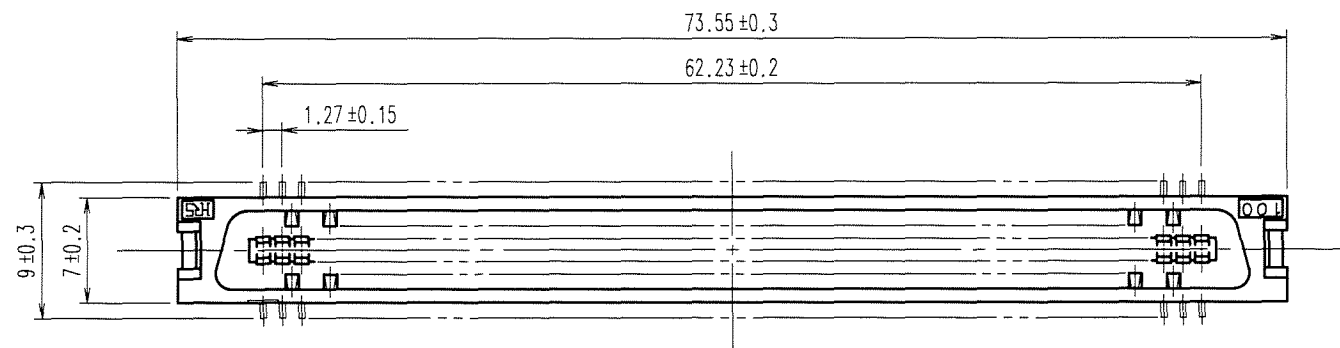
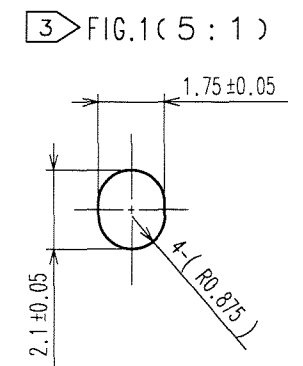



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

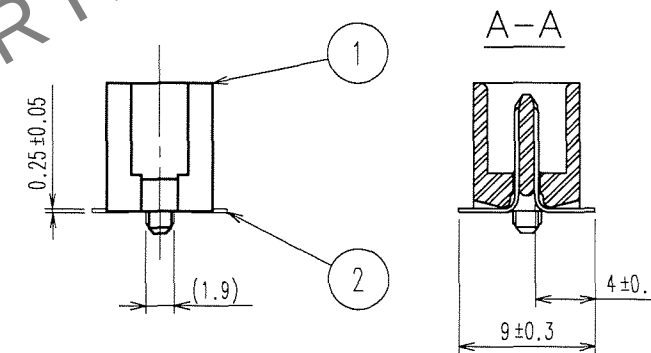

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

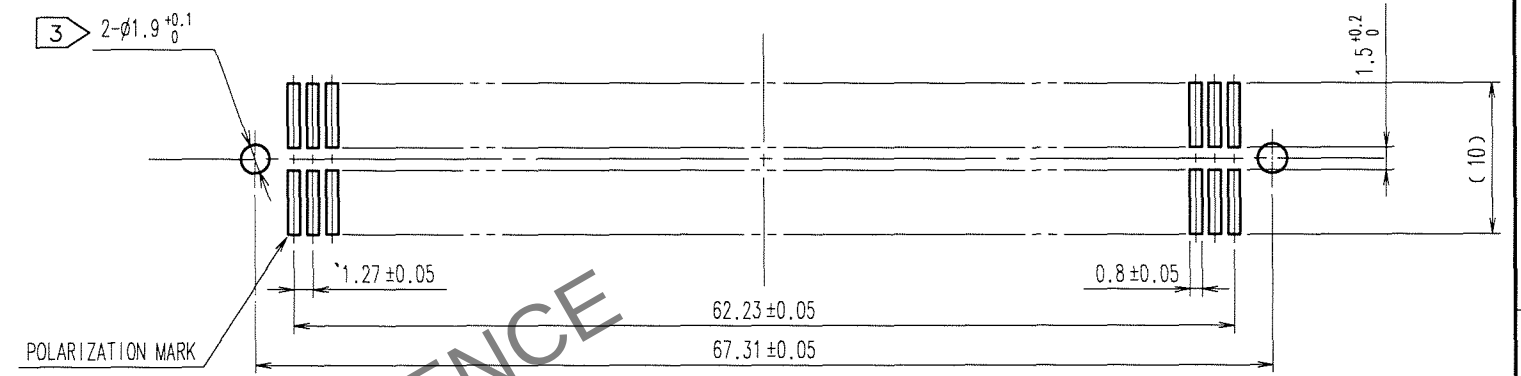

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.		
					LEAD AREA:TIN-PLATING 2μm min.		
					UNDER PLATING:NICKEL 2μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			A. SUZUKAWA 06.04.06	H. Nakamura 06.04.06	H. Ogawa 06.04.06	H. Okawa 06.04.06	. .
 SCALE 2 : 1	DRAWING NO. EDC3-082410-21			PART NO. FX2-100P-1.27SV(71)			
	 HIROSE ELECTRIC CO., LTD			CODE NO. CL572-2008-8-71			1 / 1