

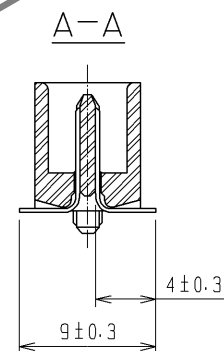
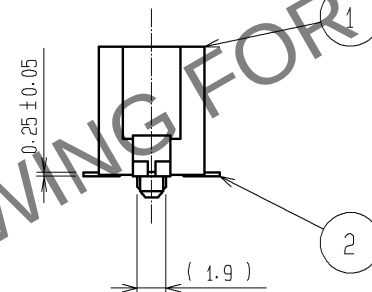
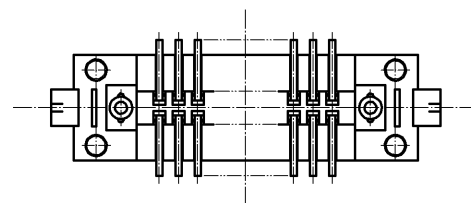
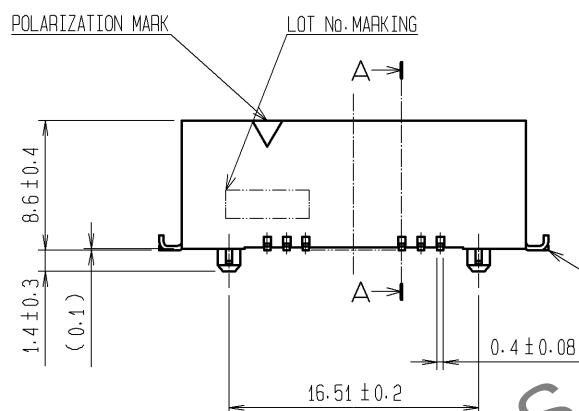



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

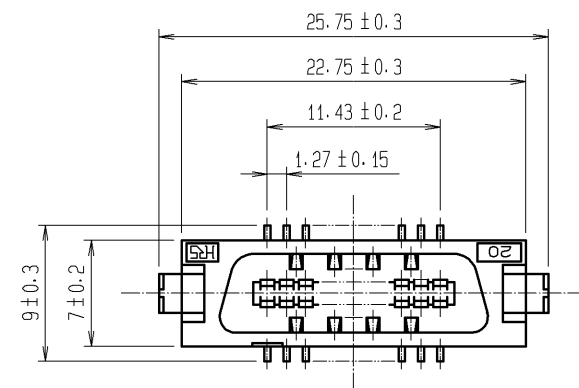

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

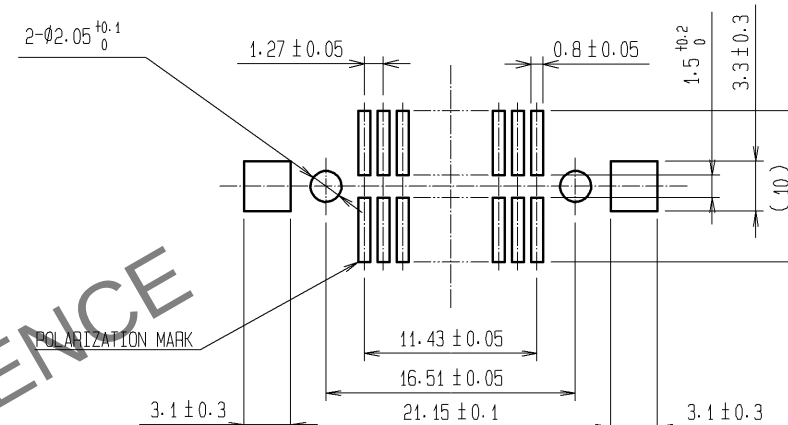

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.							
		LEAD AREA:TIN-PLATING 2μm min.							
		UNDER PLATING:NICKEL 2μm min.		4	PS	TRAY			
1	PPS	LIGHT BROWN (UL94V-0)		3	BRASS	TIN-PLATING			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm				SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		11.06.22		DRAWING NO. EDC3-082752-25			
		CHECKED :HT. YAMAGUCHI		11.06.22		PART NO. FX2-20P-1.27SVL(95)			
		DESIGNED :SY. KAMIGA		11.06.22		CODE NO. CL572-2051-7-95			
		DRAWN :HK. SUNADORI		11.06.21		 1/1			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

